



Justrite Safety Group

48.1
CATALOG

INDUSTRIAL AND COMMERCIAL MATTING FULL LINE CATALOG



UNSURPASSED QUALITY WORLDWIDE

Forgalmazó: Atamax Trade Kft.

Ajánlatkérés: atamax@atamax.hu

NoTrax® is a portfolio company of Justrite Safety Group™

As a market leader in anti-fatigue and safety matting, we understand the difference of perceptions of workers as well as the variety of workplace conditions that exist. NoTrax® offers a complete selection of floor matting options that are the perfect solution for standing workers.

Dedicated



Start with the Essential.SM



A Growing Justrite Family

In recent years we have grown, expanding Justrite Safety Group through the acquisition of other strong, valuable companies. Because of these exciting changes, we want to share our story with you—one of an unrivaled safety portfolio, expertise in environmental protection, a global network of brands, and a steadfast dedication to our customers' safety.

Start with the EssentialSM

The essence of our company is captured in a new tagline: Start with the EssentialSM. At Justrite, everything starts with safety. Protecting people, property and the planet is our first and greatest responsibility. We provide the essential safety products you need to protect your workers and workplace.



Justrite Safety Group offers industrial safety solutions and expert advice from our portfolio companies around the world.

We cover every facet of the industrial safety landscape—from the storage, containment and clean-up of hazardous materials to motion safety and emergency showers.

Whatever your needs, we can help you build the foundation of a safe, productive workplace.



GLOSSARY/PRODUCT TESTING

PRODUCT TERMS

ANTI-FATIGUE: Cushioning qualities that alleviates foot pressure, stimulates blood circulation and helps reduce stress on the neck, legs, and lower back.

CHEMICAL RESISTANCE: The degree to which industrial matting products can withstand the erosive qualities of chemicals found in applicable environments.

DECALON®: An exclusive NoTrax® fiber constructed of high Denier polypropylene yarn that offers superb wear resistance, moisture retention, and crisp pattern appearance in coordinating colors.

DENIER: Denier is defined as the thickness of the yarn strand. Combined with the face-weight (ounces of yarn per square yard), and the density or volume of yarn strands is a critical factor in the performance, quality and durability of an entrance mat.

DYNA-SHIELD®: A process that creates a tough protective barrier on the surface of foam anti-fatigue mats. Dyna-Shield® products are more resistant to wear than traditional sponge matting.

GSII™: A technology incorporated into NoTrax® industrial floor matting products that allow them to excel in harsh industrial environments where aggressive chemicals, oils, and greases are commonly found, and where traditional matting often fails.

MICROSTOP™: A unique anti-microbial rubber compound made from a specially formulated blend of raw materials that inhibits the growth of micro-organisms such as bacteria and fungi that can cause odor, stains and product deterioration.

NEEDLE PUNCH: A manufacturing process for carpet matting, needle punch is engineered with a unique blend of 4 Denier thicknesses of polypropylene yarn ranging from very fine to very thick. Needle punch products are typically more durable, offering better crush resistance and wearability due to the density of the yarn used in the process.

NITRILE RUBBER: A synthetic rubber specifically designed for harsh environments providing superior oil, grease, animal fat, and chemical resistance, abrasion resistance, gas permeability, and thermal stability. Niru® is the NoTrax®, trademarked name for Nitrile rubber compound.

NOTRAX® RECYCLED: Floor matting products that are manufactured with recycled materials as part of a growing commitment to developing high quality products while reducing the negative impact on the environment.

PVC COMPOUNDS: PVC (Polyvinyl Chloride) is a plastic compound used in a variety of manufacturing processes and end products. PVC is known for its durability, resistance to moisture, versatility, and its ability to withstand harsh environments.

TUFTED: An alternative process to needle punch for manufacturing carpet matting, tufted products are sewn into a backing using a finer yarn. Tufted mats generally are less dense and offer better moisture retention.

UNIFUSION™: A revolutionary bonding technology that uses heat and pressure to fuse a floor matting top surface to a base material. The resulting finished product is virtually a single piece, thereby eliminating the possibility of de-lamination.

REDSTOP™: A uniquely engineered technology that virtually eliminates the slipping and sliding of NoTrax® floor mats on all types of smooth floor surfaces by increasing the friction between the underside of the mat and a clean, dry floor surface.

ANTI-MICROBIAL: Destructive to or inhibiting the growth or pathogenic action of microorganisms.

PATHOGENIC: Capable of producing disease

GRAM POSITIVE/GRAM NEGATIVE BACTERIA: Gram positive and gram negative refers to how a bacteria reacts to a gram stain. The difference is the outer casing of the bacteria. A gram positive bacteria will have a thick layer of peptidoglycan (a polymer made up of amino acids and sugars) that the stain can penetrate. A gram negative bacteria has an outer membrane covering a thin layer of peptidoglycan on the outside. The outer membrane prevents the initial stain from penetrating. This outer membrane also gives the bacteria a greater degree of protection therefore making it more resistant.

PRODUCT TESTING

All NoTrax® Floor Matting products are subject to the following applicable tests, conducted by independent laboratories prior to their introduction to the market:

All NoTrax® carpet products passed the Flammability Test (PillTest DOC FF1-70).

Accelerated Soiling Test (ASTM D6540): Designed to simulate the soiling that occurs from foot traffic during normal use.

Accelerated Wear Test (S.I.M. Floor Machine): Designed to simulate the wear an entrance mat will receive under normal foot traffic. The results show the relative wear and crush resistance of the mat.

Water Retention: Designed to simulate the moisture retention of an entrance mat.

Abrasion Resistance (ASTM D3884-92): This is an accelerated wear test with results measured in weight loss.

Compression Deflection (ASTM D3574): This test assesses the anti-fatigue properties of industrial mats.

Coefficient Of Friction (ASTM C 1028-89): Designed to assess the slip resistance of floor matting.

Elongation (ASTM D412): This test measures the weight needed to break, and the % of size increase at the breaking point.

Tear Strength (ASTM D 1004): This test measures the force required to initiate the tearing of a mat.

Critical Radiant Flux (ASTM E648-94A): This test measures the level of radiant heat energy required to sustain flame propagation.

NoTrax® Mats for Professional Use – Industry leader since 1948

Established in Chicago, Illinois in 1948, NoTrax® is a pioneer in the manufacturing of high quality, performance floor matting. A family-owned and operated business for over 65 years, NoTrax® began as a modest manufacturing and repair shop for rubber entrance matting under the guidance of its founder, Charles Wood. Today, NoTrax® has grown into one of the largest integrated manufacturers of floor matting products in the world. NoTrax® now operates under the corporate umbrella of Justrite® Safety Group, continuing on nearly seven decades of service dedicated to meeting the needs of the floor matting industry with quality products, customer service and sales support. Floor matting products under the

NoTrax® brand can be found in a wide variety of markets for industrial, commercial, and food service applications. One thing that truly sets NoTrax® apart is that we manufacture our own products in ISO certified facilities and offer global distribution capabilities with distribution centers throughout the United States and Europe. The experience and knowledge gained from manufacturing these products on-site allows us to better adapt to market demands and provide flexibility and a quick response to ever-changing customer requirements. NoTrax® product is manufactured and warehoused in the facilities below.



NoTrax® Headquarters
Chicago, Illinois USA



NoTrax® - Moselle Division
Moselle, Mississippi USA
ISO 9001 / ISO 14001



NoTrax® - Europe B.V.
Barendrecht, Netherlands

TERMS & CONDITIONS

WARRANTY: All NoTrax® floor mats are guaranteed 100% under normal conditions of use. A full refund or replacement (based on the manufacturer's discretion) will be made. Buyer has the responsibility to determine the suitability of the product and assumes any liability in connection with such use. Seller shall not be liable for damages in excess of purchase price of product. Warranty does not apply to splicing or seaming of mats. Laminate – top products (including UniFusion™ products) with foam backing are not guaranteed against spike heels or stool legs. The bond on all NoTrax® laminated mats that incorporate the UniFusion™ process are guaranteed for the lifetime of the mat. The bond is guaranteed under normal conditions of use in reasonable dry application environments, or a full refund or replacement mat (based on the manufacturer's discretion) will be issued. Proof of purchase is required for all refunds or replacements. This lifetime warranty protects against delamination or bond failure, and does not cover issues unrelated to the bond such as wear or foam tears.

PRODUCT SPECIFICATIONS: All products are manufactured to meet or exceed normal industry standards. Reasonable variations in size and/or color may occur. Tolerances will vary by manufacturing process. For specific information on any given product, contact our customer service department.

All Entrance mats pass Flammability Test DOC-FF-1-70. Mats should never be stored on end. For proper storage, roll mat with top surface to the outside and lay flat in a protected area. Do not stack any materials or other mats on top of a stored mat. When placing a mat into service, be certain that the floor to be covered and the back of the mat are completely free of dirt and debris. Foreign material on the floor or the mat will cause slippage and possible injury. Manufacturer will not be liable for any injuries resulting from failure to follow recommended housekeeping procedures. Frequent cleaning under mats is also required to maintain warranty.

TERMS: 1% 10 Days, Net 30 Days. Discount applies ONLY to invoices paid within 10 days of invoice date. Does not apply to credit card or cash in advance payments. (Shipping charges, handling charges and taxes are excluded.)

PAYMENT: NoTrax® accepts payments via VISA®, MASTERCARD®, AMERICAN EXPRESS®, C.O.D. payments no longer accepted. *Credit card payments subject to up to 5% processing fee.

PRICING: Pricing quoted only to existing NoTrax® Distributors. Prices are subject to change without notice.

ORDERING: When ordering, specify product number, size, color, quantity and any special instructions required.

MINIMUM ORDER CHARGE: No minimum order required. However, a \$5.00 small-order handling charge will be added to all orders having a net value of \$25.00 or less.

FREIGHT TERMS: EXW (ExWorks), -IL or MS (see "Location" shown for each item in distributor price list) - No Freight Allowed. A handling charge will be imposed on all shipments. Any excess fees for transportation, including special handling costs, address correction fees etc., will be charged to the customer.

DAMAGED GOODS AND SHORTAGES: All delivered material should be inspected and counted BEFORE accepting shipment. Any damages or shortages must be noted on the bill of lading before signing for delivery. All claims must be reported to our Customer Care Department in writing within five (5) business days of delivery. Claims submitted outside of the required five (5) day notification period will not be accepted and payment for the shipment will be due as invoiced. Please send details of the delivery issue to customerservice@notrax.com or via fax at (708) 458 4723. Third-party or collect freight claims will be the responsibility of the payee of the freight invoice, claims against such shipments will not be considered justification for the non-payment or short payment of the corresponding invoice.

RETURN GOODS AUTHORIZATION: Factory approval is required prior to product returns. Returns without authorization may be refused. All returns are subject to verification before credit will be issued. Standard stock items in new saleable condition will be accepted for return, freight prepaid subject to a 15% or 20% (depending on product) restocking charge. Custom sizes, cut lengths or special ordered products are non-refundable and non-returnable. Return shipments must be made to the correct plant as noted on the return goods authorization. Failure to do so will incur a transportation fee deducted from the credit.

RESTOCKING CHARGES:

Full Rolls/Stock Sizes-15%
Broken Cases-20%



**NoTrax® is a proud member of
the U.S. Green Building Council.**

TABLE OF CONTENTS

Section/Product	Page
Anti-Fatigue - Dry (Laminates)	
485 Ergo Trax®	6
985 Ergo Trax® Grande™	6
479 Cushion Trax®	8
975 Cushion Trax® Ultra™	8
979 Saddle Trax®	8
490 Dura Trax®	10
976 Dura Trax® Ultra™	10
990 Dura Trax® Grande™	10
480 Pebble Trax®	10
980 Pebble Trax® Grande™	10
482 Bubble Trax®	12
782 Bubble Trax® Ultra™	12
982 Bubble Trax® Grande™	12
474 Ergo Mat™	12
974 Ergo Mat™ Grande™	12
470 Marble Sof-Tyle™	14
970 Marble Sof-Tyle™ Grande™	14
477 Woodgrain Sof-Tyle™	14
977 Woodgrain Sof-Tyle™ Grande™	14
Anti-Fatigue - Dry (Foam)	
T17P Superfoam™ Perf	17
T17 Superfoam™	17
425 Superfoam™ Revive RS	18
440 Superfoam™ Comfort™	18
454 Ergo Comfort™	18
419 Diamond Sof-Tred™ w/Dyna-Shield®	20
417 Bubble Sof-Tred™ w/Dyna-Shield®	20
406 Razorback™ w/Dyna-Shield®	20
413 Blade Runner™ w/Dyna-Shield®	20
415 Pebble Step Sof-Tred™ w/Dyna-Shield®	22
410 Airug®	22
411 Sof-Tred™	22
Anti-Fatigue - Dry/Wet (Rubber)	
556 Cushion-Ease® Solid	26
557 Cushion-Ease® Ergo™	26
558 Cushion-Ease® ESD Solid	26
656/656FR Niru® Cushion-Ease® Solid	26
856/856FR Niru® Cushion-Ease® GSII™ Solid	26
550 Cushion-Ease®	28
650/650FR Niru® Cushion-Ease®	28
850/850FR Niru® Cushion-Ease® GSII™	28
570 De-Flex™	30
572 De-Flex™ Niru®	30
573 De-Flex™ ESD	30
460 Skymaster® HD	32
462 Skymaster® HD Niru®	32
463 Skymaster® HD ESD	32
465 Skymaster® HD Niru® FR	32
430 Skymaster® HD i-Curve™	33
446 Skymaster® HD o-Curve™	33
432 Skymaster® HD i-Curve™ Niru®	33
442 Skymaster® HD o-Curve™ Niru®	33
433 Skymaster® HD i-Curve™ ESD	33
443 Skymaster® HD o-Curve™ ESD	33
435 Skymaster® HD i-Curve™ Niru® FR	33
445 Skymaster® HD o-Curve™ Niru® FR	33
455 Skystep™	34
457 Skystep™ ESD	34

Section/Product	Page
Anti-Fatigue - Dry/Wet (Rubber) Cont.	
447 Comfort-Eze™	34
549 Safety Stance®	35
543 Cushion-Tred™	35
562 Sanitop®	36
504 Beveled Drain-Step™	36
Modular Tiles - Dry/Wet (PVC)	
620 Diamond Flex-Lok™	38
621 Diamond Flex-Lok™ Solid	38
520 Cushion-Lok™	38
522 Cushion-Lok™ w/Grip-Step®	38
523 Modular Lok-Tyle™	38
Industrial Runners - Dry/Wet	
531 Safety Grid™	40
420 Cushion-Dek™	40
755 Niru® Versa Runner™	40
T23 Multi-Mat II™	40
765 Deep Freeze Mat™	41
758 Niru® Knob-Top Runner™	41
730 V-Groove Corr. Runner™ - Vinyl	42
750 V-Groove Corr. Runner™ - Rubber	42
735 Round Rib Runner	42
737 Diamond Plate Runner	42
Electrostatic Discharge (ESD)	
825 Cushion-Stat™ w/Dyna-Shield®	44
827 Anti-Stat P.O.P.™	44
558 Cushion-Ease® ESD Solid	45
573 De-Flex™ ESD	45
463 Skymaster® HD ESD	45
457 Skystep™ ESD	45
826 Diamond Stat™	46
927 Diamond Stat™ Grande™	46
926 Smooth Stat™	46
Specialty/Sanitation - Dry/Wet	
448 Autoclaveable Bubble Mat	47
080 Clean-Step™ Tacky Mat	47
346 Sani-Trax®	48
351 Sani-Trax® Plus	48
High Voltage Switchboard	
830 Switchboard Matting	50
831 Diamond Switchboard Matting	50
835,836 Military Switchboard Mats	50
Industrial Specialty	
040 Slabmat™	52
045 Weight Room Mat	52
950 Knee Rx™	54
951 Knee Rx™ HD	54
680 Safety Trax®	54
Entrance - Foyer	
592 Masterflex™ Drainage	56
593 Masterflex™ Drainage w/Carpet	56
692 Masterflex™ Heel-Proof	56
693 Masterflex™ Heel-Proof w/Carpet	56
370 Master Trax®	57
371 Master Trax® Lite	57
Entrance - Outdoor	
340 Soil Guard™	58
350 Slip Guard™ w/Grit-Step™	58

Section/Product	Page
Entrance - Outdoor Cont.	
345 Rubber Brush™	58
265 Wayfarer®	59
266 Wayfarer® Custom HD Unbacked	59
267 Wayfarer® Custom HD	59
599 Oct-O-Flex™	60
352 Boot Scraper™	60
Entrance - Vinyl-Backed	
231 Prelude™	61
146 Encore™	61
141 Ovation™	61
117 Heritage Rib™	62
118 Arrow Trax®	62
131 Dante™	62
136 Polynib™	63
145 Preference™	63
138 Uptown™	64
132 Estes®	64
137 Opera™	64
Entrance - Logos	
193 Superior Impact™ Logo Mat	65
373 Master Guard™ Logo Mat	66
Entrance - Rubber-Backed	
150 Aqua-Trap®	68
161 Barrier Rib™	68
165 Guzzler™ CTE™	69
169 Opus™ CTE™	69
166 Guzzler™	70
167 Portrait™	70
168 Opus™	70
Value Line	
105 Chevron	71
109 Brush Step®	71
130 Sabre™	71
151 Diamond CTE™	71
152 Waffle CTE™	71
408 Achilles™	72
409 Textured Cushion Sof-Tred™	72
508 Diamond Cushion™	72
509 Diamond-Tuff™	72
510 Diamond-Tuff™ Max	72
511 Marble-Tuff™	72
512 Marble-Tuff™ Max	72
514 Sure Step	73
619 Drain Lite™	73
501 Cushion Connect™	73
505 Grit-Step™	73
616 Co-Nex™	73
Accessories	
083 Standard Beveled Nosing	74
084 Heavy Duty Beveled Nosing	74
085 Velcro® Carpet Anchor	74
082 Splicing Kit	74
090 Mat Hold	74
086 Adhesive	74
Documentation	
Chemical Chart	75
Proposition 65 Warnings	77

FEATURE ICONS



Anti-Fatigue:
Matting that alleviates foot pressure, stimulates blood circulation and helps reduce stress on body.



Cut Lengths:
Mats available in specific lengths and in some cases custom sizes and/or configurations.



Food Service:
Matting suitable for use in kitchens, bars and other food service areas.



Modular System:
Interlocking mats allow for easy on-site customization and configurations.



Anti-Slip:
Matting designed to provide added traction through aggressive surface patterns and textures.



Drainage:
Open construction matting allows for liquids and debris to pass through, providing secure footing in wet environments.



Heavy Traffic:
Recommended for use in heavy traffic entranceways.



Non-Conductive:
Formulated to provide insulation for the worker, it keeps the worker from being "grounded", thereby preventing electric shock.



Anti-Static:
Formulated to absorb static electricity.



Fire Retardant:
Matting designed to resist the spread of fire and withstand heat, tested and certified by independent laboratories.



Insulation:
Protects against cold floors, vibrations and noise.



Oil/Grease Resistant:
Matting suitable for contact with oils, greases, and animal fats.



Cleaning:
Suitable for cleaning with high pres-sure (hot) power-washer.



Floor Protection:
Absorbs impact, reduces break-age and protects floors.



Light Traffic:
Recommended for use in light traffic entranceways.



Outdoor Use:
Heavy-duty construction designed to act as a first line of defense against tracked-in dirt by scraping soil and moisture from shoes.



Cold Resistant:
Material formulated to withstand freezing temperatures.



Food Processing:
Matting suitable for use in food processing plants/areas where exposure to animal fats, greases, and oils are common.



Medium Traffic:
Recommended for use in medium traffic entranceways.



Welding:
Matting designed to withstand exposure to sparks in areas where welding takes place.

PRODUCT INDEX (by part number)

No.	Product	Pg.	No.	Product	Pg.	No.	Product	Pg.	No.	Product	Pg.
040	Slabmat™	52	371	Master Trax® Lite	57	485	Ergo Trax®	6	693	Masterflex™ Heel-Proof Carpet	56
045	Weight Room Mat	52	373	Master Guard™ Logo Mats	66	490	Dura Trax®	10	730	V-Groove Corr. Runner™ Vinyl	42
080	Clean-Step™ Tacky Mat	47	406	Razorback™ w/Dyna-Shield®	20	501	Cushion Connect™	73	735	Round Rib Runner	42
105	Chevron	71	408	Achilles™	72	504	Beveled Drain-Step™	36	737	Diamond Plate Runner	42
109	Brush Step®	71	409	Textured Cushion Sof-Tred™	72	505	Grit-Step™	73	750	V-Groove Corr. Runner™ Rubber	42
117	Heritage Rib™	62	410	Airug®	22	508	Diamond Cushion™	72	755	Niru® Versa Runner™	40
118	Arrow Trax®	62	411	Sof-Tred™	22	509	Diamond-Tuff™	72	758	Niru® Knob-Top Runner™	41
130	Sabre™	71	413	Blade Runner™ w/Dyna-Shield®	20	510	Diamond-Tuff™ Max	72	765	Deep Freeze Mat™	41
131	Dante™	62	415	Pebble Step Sof-Tred™ w/Dyna.	22	511	Marble-Tuff™	72	782	Bubble Trax® Ultra™	12
132	Estes®	64	417	Bubble Sof-Tred™ w/Dyna.	20	512	Marble-Tuff™ Max	72	825	Cushion Stat™ w/Dyna-shield®	44
136	Polynib™	63	419	Diamond Sof-Tred™ w/Dyna.	20	514	Sure Step	73	826	Diamond Stat™	46
137	Opera™	64	420	Cushion-Dek™	40	520	Cushion-Lok™	38	827	Anti-Stat P.O.P.™	44
138	Uptown™	64	425	Superfoam™ Revive RS	18	522	Cushion-Lok™ w/Grip-Step®	38	830	Switchboard Matting	50
141	Ovation™	61	430	Skymaster® HD i-Curve™	33	523	Modular Lok-Tyle™	38	831	Diamond Switchboard Matting	50
145	Preference™	63	432	Skymaster® HD i-Curve™ Niru®	33	531	Safety Grid™	40	835	Military Switchboard Mats	50
146	Encore™	61	442	Skymaster® HD o-Curve™ Niru®	33	543	Cushion-Tred™	35	836	Military Switchboard Mats	50
150	Aqua-Trap®	68	433	Skymaster® HD i-Curve™ ESD	33	549	Safety Stance®	35	850	Niru® Cushion-Ease® GSII™	28
151	Diamond CTE™	71	435	Skymaster® HD i-Curve™ Niru®	33	550	Cushion-Ease®	28	856	Niru® Cushion-Ease® GSII™ Sol.	26
152	Waffle CTE™	71	440	Superfoam™ Comfort™	18	556	Cushion-Ease® Solid	26	926	Smooth Stat™	46
161	Barrier Rib™	68	443	Skymaster® HD o-Curve™ ESD	33	557	Cushion-Ease® Ergo™	26	927	Diamond Stat™ Grande™	46
165	Guzzler™ CTE™	69	445	Skymaster® HD i-Curve™ Niru®	33	558	Cushion Ease® ESD Solid	45	950	Knee Rx™	54
166	Guzzler™	70	446	Skymaster® HD o-Curve™	33	562	Sanitop®	36	951	Knee Rx™ HD	54
167	Portrait™	70	447	Comfort-Eze™	34	570	De-Flex™	30	970	Marble Sof-Tyle™ Grande™	14
168	Opus™	70	448	Autoclaveable Bubble Mat	47	572	De-Flex™ Niru®	30	974	Ergo Mat™ Grande™	12
169	Opus™ CTE™	69	454	Ergo Comfort™	18	573	De-Flex™ ESD	45	975	Cushion Trax® Ultra™	8
193	Superior Impact™ Logo Mat	65	455	Skystep™	34	592	Masterflex™ Drainage	56	976	Dura Trax® Ultra™	10
231	Prelude™	61	457	Skystep™ ESD	45	593	Masterflex™ Drain w/Carpet	56	977	Woodgrain Sof-Tyle™ Grande™	14
265	Wayfarer®	59	460	Skymaster® HD	32	597	Masterflex™ Safety Ramps	56	979	Saddle Trax®	8
266	Wayfarer® Custom HD Unbacked	59	462	Skymaster® HD Niru®	32	599	Oct-O-Flex™	60	980	Pebble Trax® Grande™	10
267	Wayfarer® Custom HD	59	463	Skymaster® HD ESD	32	616	Co-Nex™	73	982	Bubble Trax® Grande™	12
340	Soil Guard™	58	465	Skymaster® HD Niru® FR	32	619	Drain Lite™	73	985	Ergo Trax® Grande™	6
345	Rubber Brush™	58	470	Marble Sof-Tyle™	14	620	Diamond Flex-Lok™	38	990	Dura Trax® Grande™	10
346	Sani-Trax®	48	474	Ergo Mat™	12	621	Diamond Flex-Lok™ Solid	38	T17	Superfoam™	16
350	Slip Guard™ w/Grit-Step™	58	477	Woodgrain Sof-Tyle™	14	650	Niru® Cushion-Ease®	28	T17P	Superfoam™ Perf	16
351	Sani-Trax® Plus	48	479	Cushion Trax®	8	656	Niru® Cushion-Ease® Solid	26	T23	Multi-Mat III™	40
352	Boot Scraper™	60	480	Pebble Trax®	10	680	Safety Trax®	54			
370	Master Trax®	57	482	Bubble Trax®	12	692	Masterflex™ Heel-Proof	56			

BENEFITS OF ANTI-FATIGUE MATTING

THE PROBLEM


In many industries, employees are required to work or stand in one spot for extended periods of time. The strain and stress applied to the neck, legs, and lower back can be directly linked to the employees overall health and productivity. Leg and lower back pain is highest in workers who stand 4 hours or more per day. Muscles and joints are constricted and blood flow is reduced. The end result, the heart is forced to work harder, sapping energy, and minimizing worker capacity. In addition, long-term standing causes pronation, or excessive flattening of the foot which can lead to plantar fasciitis and other serious and painful foot conditions. Experts agree that anti-fatigue floor matting provides cushion to relieve neck, leg and lower back discomfort and can significantly improve productivity and employee morale while reducing absenteeism and chronic illnesses related to long-term standing.

HOW DOES AN ANTI-FATIGUE FLOOR MAT WORK?

How anti-fatigue floor matting works is actually quite simple. The cushion or flex of the mat stimulates minute, undetectable muscle movement in the legs and calf muscles as the body continuously adjusts to remain stable. This in turn increases blood flow to-and-from the area, and the improved circulation reduces the pain and discomfort. Floor matting also provides insulation and relief from cold/damp floors, another cause of accelerated fatigue.

There is also a common belief that the reduction of fatigue also reduces the possibility or frequency of accidents and improves general work efficiency. With the use of anti-fatigue mats, there are fewer days lost to injuries, fewer medical claims, as well as compliance with new health and safety requirements.

It is also important to remember, softer is not always better. In other words, too much cushioning can have a negative effect. Too great an amount of softness or "give" will actually cause excessive fatigue because it overworks the muscles. Think of it like jogging on the beach as an extreme example of this concept. NoTrax® anti-fatigue floor mats are made of specific formulations and designs that provide varying levels of fatigue relief and comfort. The end result, increased productivity and greater employee satisfaction.

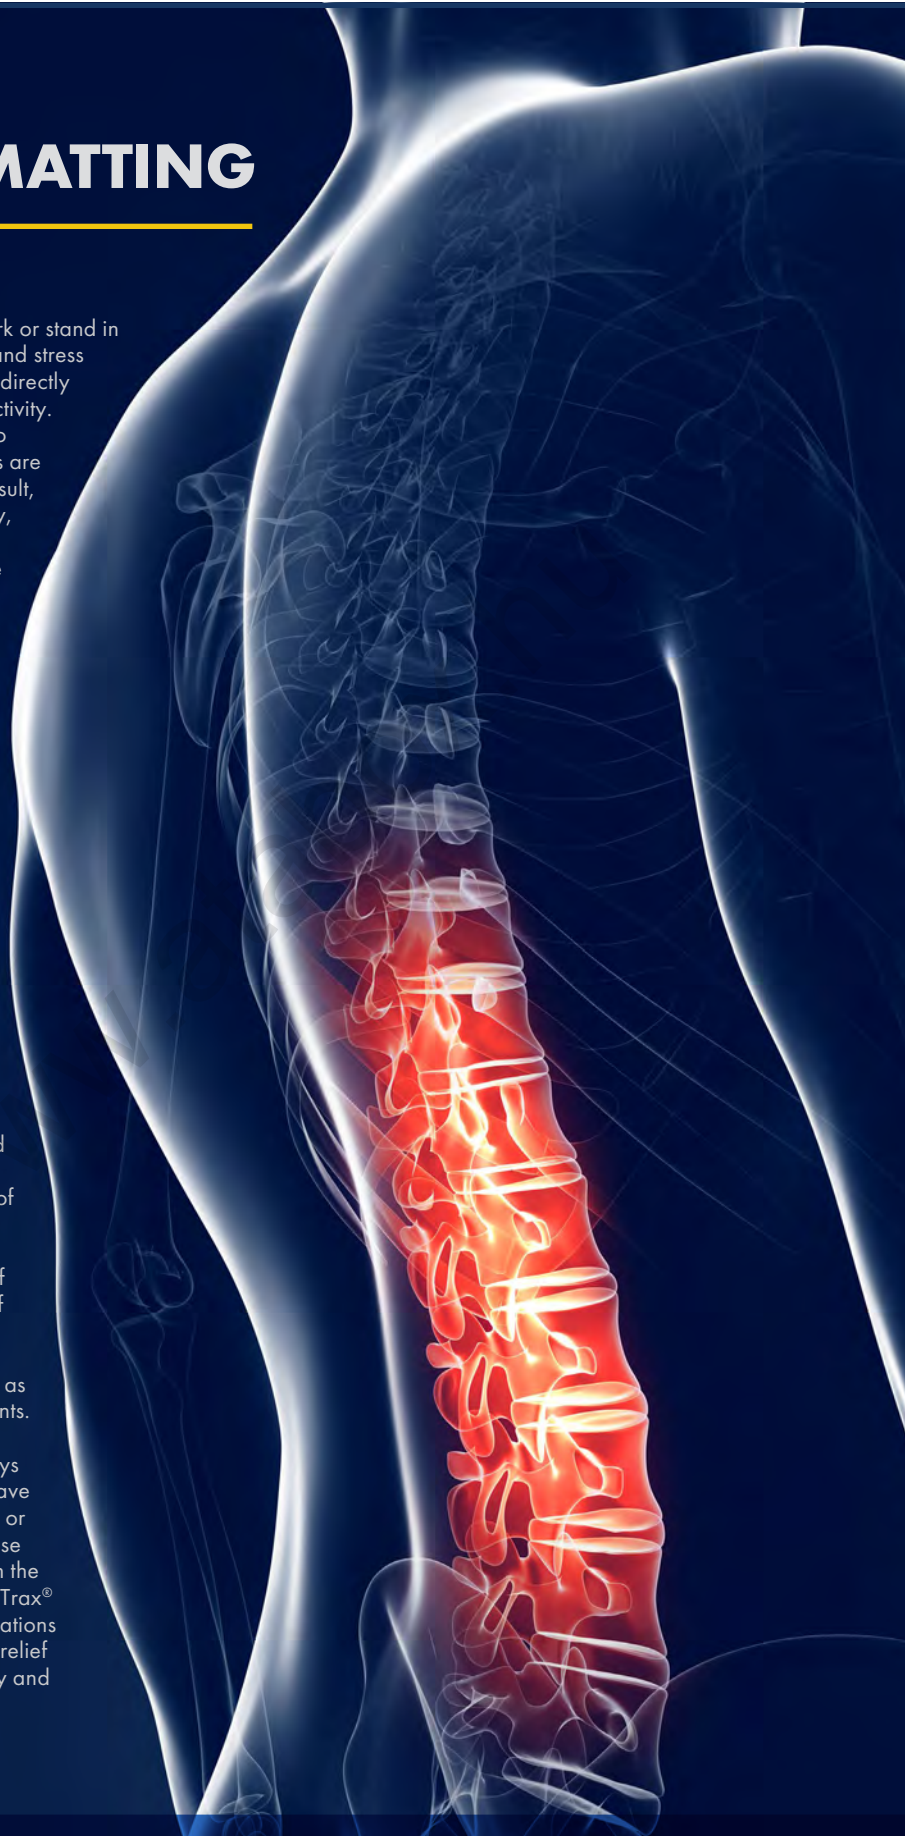








DIAMOND PLATE ANTI-FATIGUE SERIES

The NoTrax® Diamond Plate series is high performance anti-fatigue matting, representing the ultimate in comfort and durability for today's industrial environments. The signature Diamond Plate top surfaces are available in general purpose Vinyl or Nitrile rubber for added spark resistance in fabricating environments. Diamond Plate top surfaces are bonded to a PVC or NIRU® nitrile rubber sponge base for the ultimate in anti-fatigue and rebound. Both are designed and manufactured with the right amount of compression deflection to meet ergonomic needs. Multiple thicknesses are available to satisfy any workers standing preferences.

The Diamond Plate series features NoTrax® exclusive RedStop™ non-slip backing, and UniFusion™ bonding process. RedStop™ non-slip backing, certified by the NFSI (National Floor Safety Institute), eliminates the slipping and sliding of NoTrax® floor mats on smooth floor surfaces such as vinyl composite tile, painted or epoxy coated concrete, carpet, and ceramic tile. NoTrax® UniFusion™ bonding process provides a lifetime warranty against mat delamination.



SELECT THE RIGHT MAT FOR YOU

		Vinyl Top PVC Sponge Base <small>(DIAMOND-TUFF™ SERIES)</small>	Vinyl Top Niru Rubber Base <small>(ERGO TRAX® SERIES)</small>	Vinyl Top PVC Sponge Base <small>(CUSHION TRAX® SERIES)</small>	Rubber Top PVC Sponge Base <small>(DURA TRAX® SERIES)</small>
THICKNESS	9/16" Thick	509 (pg 72)	485 (pg 6)	479 (pg 8)	490 (pg 10)
	3/4" Thick			975 (pg 8)	976 (pg 10)
	1" Thick	510 (pg 72)	985 (pg 6)	979 (pg 8)	990 (pg 10)
FEATURES	RedStop™ 			479, 975, 979	490, 976, 990
	UniFusion™ 		485, 985	479, 975, 979	490, 976, 990
	Welding 				490, 976, 990
	Anti-Fatigue 	509, 510	485, 985	479, 975, 979	490, 976, 990
	Anti-Slip 	509, 510	485, 985	479, 975, 979	490, 976, 990
	Cut Lengths 	509, 510	485, 985	479, 975, 979	490, 976, 990
	Insulation 	509, 510	485, 985	479, 975, 979	490, 976, 990




ANTI-FATIGUE - Dry (Laminates)



485 - ERGO TRAX®
985 - ERGO TRAX® GRANDE™

NEW!

- The vinyl diamond plate top surface is combined with a dense closed cell rubber foam base
- UniFusion™ bond guaranteed for the life of the mat
- Beveled edges on all 4 sides

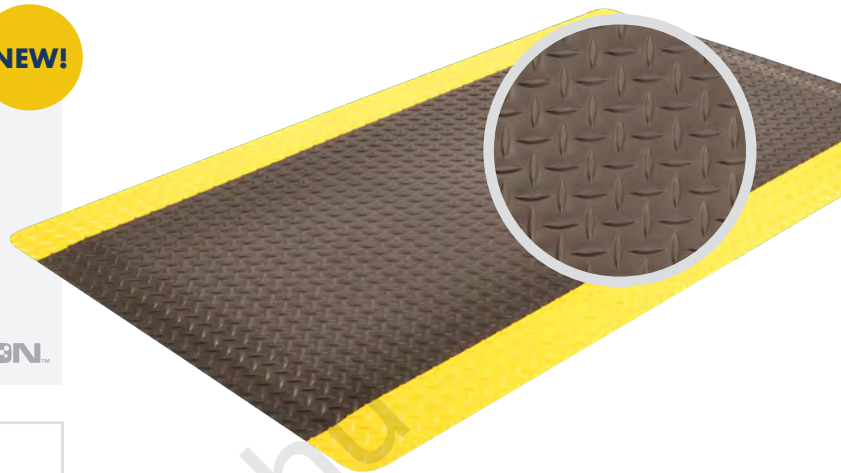Uni
FUSION™




Stock Sizes	2'x3', 3'x5', 3'x12'	
Roll Sizes	2'x75', 3'x75', 4'x75'	
Cut Lengths	2', 3', and 4' widths (up to 75' long)	
Color	 Black	 Black/Yellow

Applications:

- Multi-shift operations in dry work areas.
- Any work station where worker is standing for prolonged periods of time.



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

Thickness:

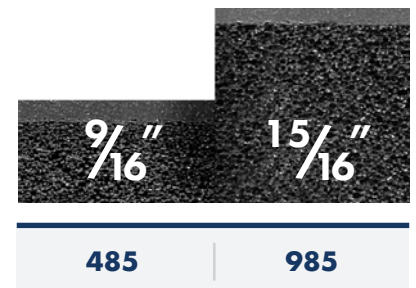

Performance:

	Good	Better	Best	Superior
Wear Resistance			485	985
Anti-fatigue Performance			485	985
Slip Resistance			485	985

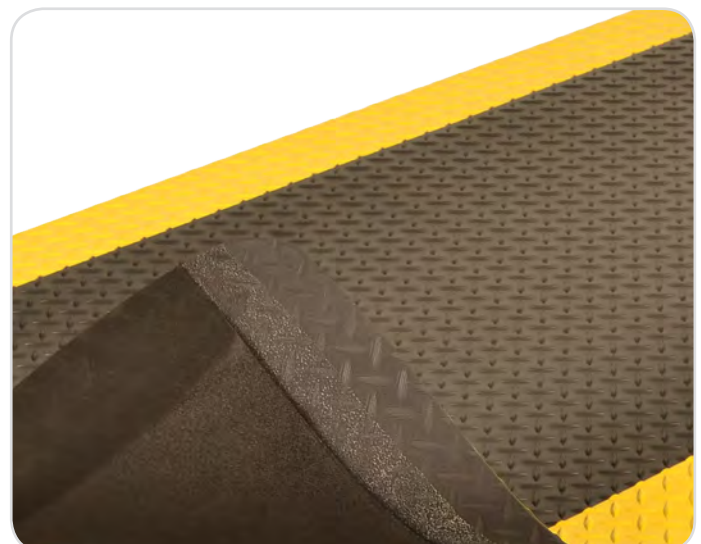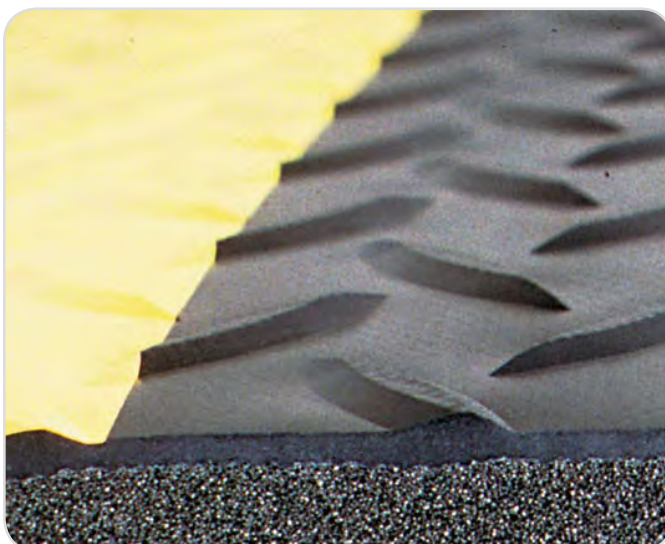

ANTI-FATIGUE - Dry (Laminates)






ANTI-FATIGUE - Dry (Laminates)

- 479** - CUSHION TRAX®
- 975** - CUSHION TRAX® ULTRA™
- 979** - SADDLE TRAX®

- The 100% recycled vinyl diamond plate top surface is combined with a dense closed cell PVC foam base
- UniFusion™ bond guaranteed for the life of the mat
- RedStop™ non-slip backing to reduce mat slippage
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)
- See Splicing Kit on pg 74




Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x75', 3'x75', 4'x75', 5'x75'
Cut Lengths	2', 3', 4' and 5' widths (up to 75' long) *479 available in up to 150' long
Color	 Black  Black/Yellow  Grey <small>(not available in 5' wide rolls or cut lengths)</small>

Applications:

- Multi-shift operations in dry work areas.
- Any work station where worker is standing for prolonged periods of time.

Thickness:


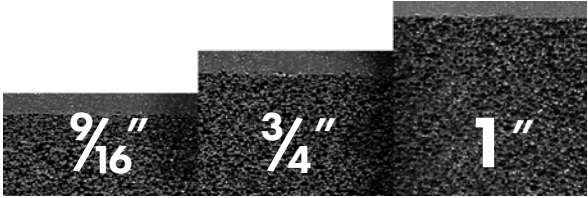


9/16"	3/4"	1"
479	975	979

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

Performance:

	Good	Better	Best	Superior
Wear Resistance			479	975, 979
Anti-fatigue Performance			479	975, 979
Slip Resistance			479	975, 979

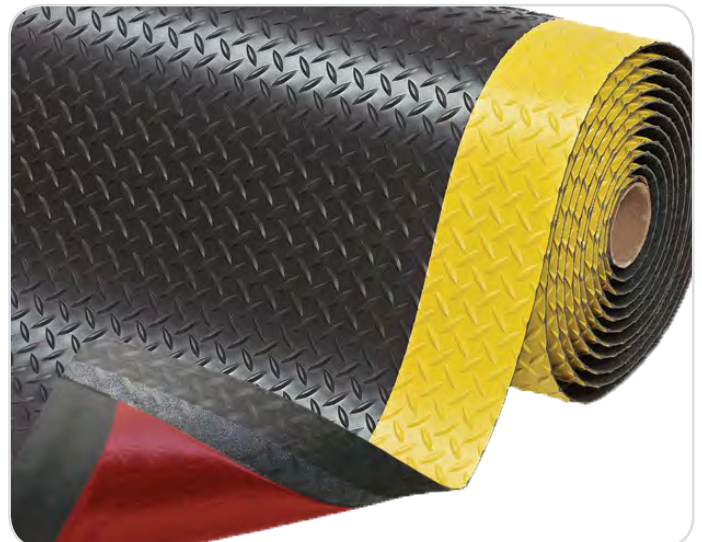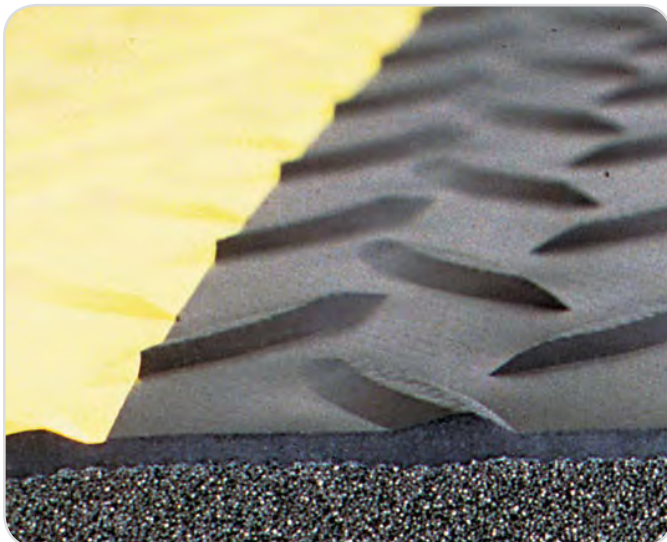

ANTI-FATIGUE - Dry (Laminates)

DURA TRAX[®] SERIES



PEBBLE TRAX[®] SERIES



ANTI-FATIGUE - Dry (Laminates)

DURA TRAX® SERIES



- 490** - DURA TRAX®
- 976** - DURA TRAX® ULTRA™
- 990** - DURA TRAX® GRANDE™

- The nitrile rubber diamond plate top surface is combined with a dense closed cell PVC foam base
- UniFusion™ bond guaranteed for the life of the mat
- RedStop™ non-slip backing to reduce mat slippage
- Withstands exposure to sparks
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)



NEW!
3/4"



Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x75', 3'x75', 4'x75'
Thickness	9/16" (490), 3/4" (976), 1" (990)
Cut Lengths	2', 3', and 4' widths (up to 75' long)
Colors	 Black  Black/Yellow

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

Applications:

- Welding applications.
- Workstations where comfort and slip resistance are needed.
- Any work station where worker is standing for prolonged periods of time.

Performance:

	Good	Better	Best	Superior
Wear Resistance			490	976,990
Anti-fatigue Performance			490	976,990
Slip Resistance			490	976,990




Anti-Fatigue Cut Lengths Insulation Welding

PEBBLE TRAX® SERIES

- 480** - PEBBLE TRAX®
- 980** - PEBBLE TRAX® GRANDE™

- The pebble embossed rubber top surface is combined with a dense closed cell PVC foam base
- UniFusion™ bond guaranteed for the life of the mat
- RedStop™ non-slip backing to reduce mat slippage
- Spark resistant
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)



Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x75', 3'x75', 4'x75'
Thickness	1/2" (480), 1" (980)
Cut Lengths	2', 3', and 4' widths (up to 75' long)
Colors	 Black



Applications:

- Fabricating applications.
- Work stations that are subjected to extreme traffic.

Performance:

	Good	Better	Best	Superior
Wear Resistance			480	980
Anti-fatigue Performance			480	980
Slip Resistance			480	980

ANTI-FATIGUE - Dry (Laminates)





ANTI-FATIGUE - Dry (Laminates)




BUBBLE TRAX® SERIES

- 482 - BUBBLE TRAX®**
- 782 - BUBBLE TRAX® ULTRA™**
- 982 - BUBBLE TRAX® GRANDE™**


NEW!
3/4"

- Heavy-duty vinyl, bubble top surface combined with a dense closed cell PVC foam base provides added cushioning comfort
- UniFusion™ bond guaranteed for the life of the mat
- RedStop™ non-slip backing to reduce mat slippage
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)



Stock Sizes	2'x3', 3'x5'
Roll Sizes	2'x75', 3'x75', 4'x75', 5'x75' <small>*Grey not available in 4'x75' and 5'x75'</small>
Thickness	1/2" (482), 3/4" (782), 1" (982)
Cut Lengths	2', 3', 4' and 5' widths (up to 75' long) <small>*Grey not available in 4' and 5' widths</small>
Colors	 Black  Black/Yellow  Grey*

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

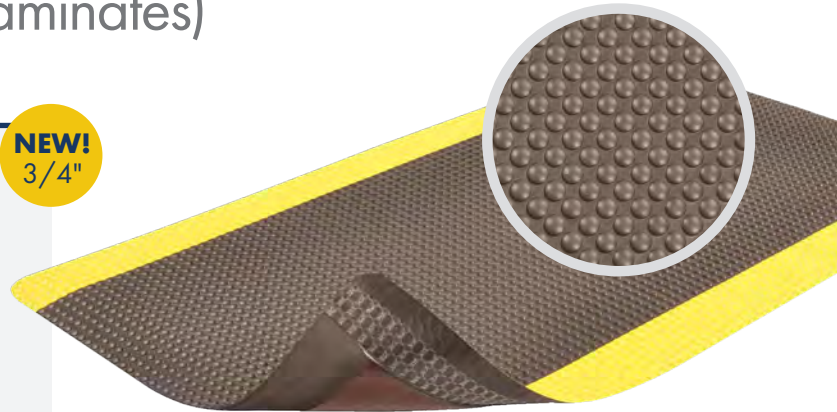

Applications:

- Extremely well suited for multi-shift operations.
- Dry work areas where the worker is standing for prolonged periods of time; workstations, assembly lines.
- General lab use.

Performance:

	Good	Better	Best	Superior
Wear Resistance			482	782,982
Anti-fatigue Performance			482	782,982
Slip Resistance			482	782,982




ERGO MAT™ SERIES


- 474 - ERGO MAT™**
- 974 - ERGO MAT™ GRANDE™**

- Heavy-duty vinyl, corrugated ribbed top surface combined with a dense closed cell PVC foam base
- Corrugated ribbed texture runs length of the mat. Provides added traction and is easy to sweep clean.
- UniFusion™ bond guaranteed for the life of the mat
- RedStop™ non-slip backing to reduce mat slippage
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)



Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x75', 3'x75', 4'x75'
Thickness	1/2" (474), 1" (974)
Cut Lengths	2', 3', and 4' widths (up to 75' long)
Colors	 Black

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

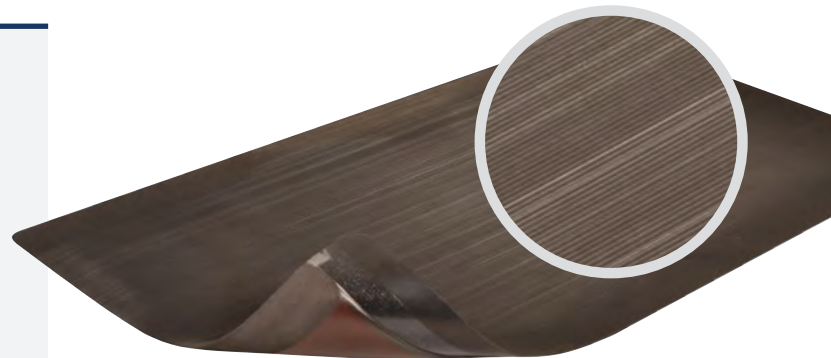

Applications:

- Multi-shift environments.
- Work stations that are subjected to extreme traffic.

Performance:

	Good	Better	Best	Superior
Wear Resistance			474	974
Anti-fatigue Performance			474	974
Slip Resistance			474	974

ANTI-FATIGUE - Dry (Laminates)

SOF-TYLE™ SERIES



ANTI-FATIGUE - Dry (Laminates)

SOF-TYLE™ SERIES


470 - MARBLE SOF-TYLE™ 970 - MARBLE SOF-TYLE™ GRANDE™

- Heavy-duty vinyl, marble top surface combined with a dense closed cell PVC foam base provides added cushioning comfort
- UniFusion™ bond guaranteed for the life of the mat
- RedStop™ non-slip backing to reduce mat slippage
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)



Stock Sizes	2'x3', 3'x5', 3'x12'			
Roll Sizes	2'x75', 3'x75', 4'x75'			
Thickness	1/2" (470), 1" (970)			
Cut Lengths	2', 3' and 4' widths (up to 75' long)			
Colors				
	Black	Grey	Blue	Walnut

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

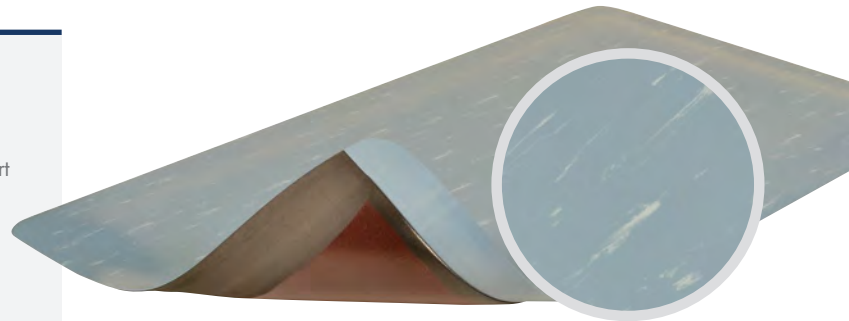

Applications:

- General lab/testing areas
- Order fulfillment lines
- Check-out counters
- Pharmacies



Performance:

	Good	Better	Best	Superior
Wear Resistance			470	970
Anti-fatigue Performance			470	970
Slip Resistance			470	970

477 - WOODGRAIN SOF-TYLE™ 977 - WOODGRAIN SOF-TYLE™ GRANDE™

- Heavy-duty vinyl, faux woodgrain top surface combined with a dense closed cell PVC foam base provides added cushioning comfort
- UniFusion™ bond guaranteed for the life of the mat
- RedStop™ non-slip backing to reduce mat slippage
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)



Stock Sizes	2'x3', 3'x5'	
Roll Sizes	3'x75'	
Thickness	1/2" (477), 1" (977)	
Cut Lengths	3' width (up to 75' long)	
Colors		
	Cherry	Oak



Applications:

- Check-out counters
- Office Buildings
- Reception areas
- Retail / Hotels




Performance:

	Good	Better	Best	Superior
Wear Resistance			477	977
Anti-fatigue Performance			477	977
Slip Resistance			477	977

ANTI-FATIGUE - Dry/Wet (Rubber Foam)



Rubber foam matting available in a variety of models in stock, roll, cut length, spliced and custom configurations

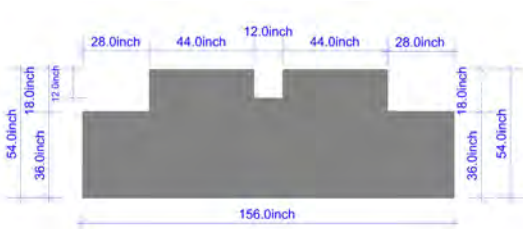

- T17 Superfoam[™] can be made in a number of custom configurations to meet your specific work cell needs



SUPERFOAM™ - Anti-Fatigue Matting




T17P - SUPERFOAM™ PERF T17 - SUPERFOAM™

- Anti-fatigue mat design especially for safety and ergonomic comfort
- Closed cell nitrile foam, does not absorb liquids, and is highly resistant to chemicals, greases, and oils.
- Durable and abrasion resistant
- 45°, four-sided beveled edge
- Silicone free compound

T17P SUPERFOAM™ PERF




T17 SUPERFOAM™

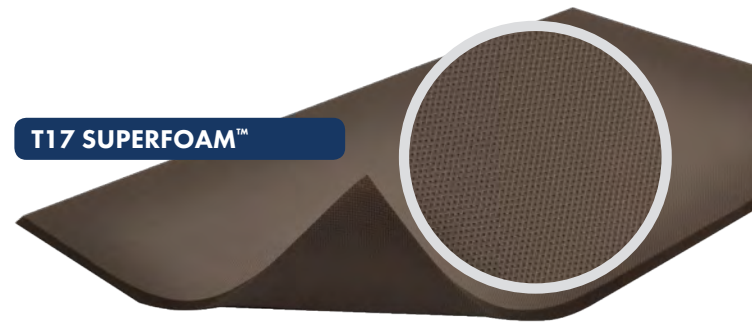


Applications:

- Assembly Lines
- Laboratories
- Workstations
- Wet Environments
- CNCs
- Elevated Platforms

Performance:

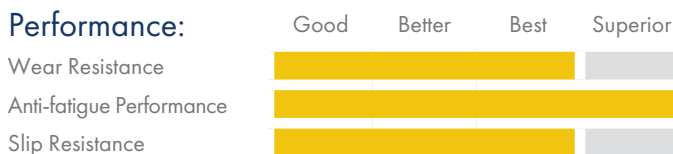

Stock Sizes	3'x2', 3'x3', 3'x4', 3'x5', 3'x6', 3'x8'
Roll Sizes	3'x 75', 4'x75'
Thickness	5/8"
Cut Lengths	3' and 4' widths (up to 75' long)
Colors	 Black

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

ANTI-FATIGUE - Dry/Wet (Rubber & Polyurethane Foam)




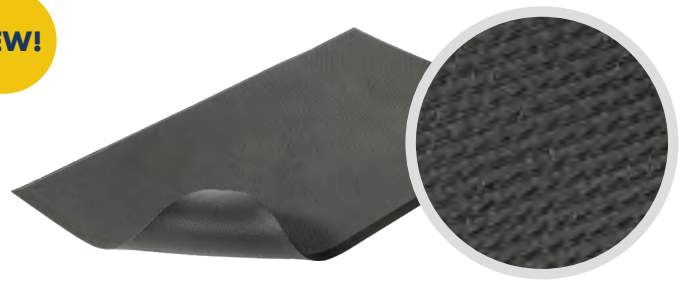


425 - SUPERFOAM™ REVIVE RS

NEW!

- Durable rubberized sponge mat designed for extreme ergonomic comfort
- Closed cell foam blend does not absorb liquids
- Highly resistant to greases, oils, and animal & vegetable fats

Stock Sizes	20"x24", 24"x40", 24"x72", 36"x40", 36"x60"
Thickness	3/4"
Colors	 Black




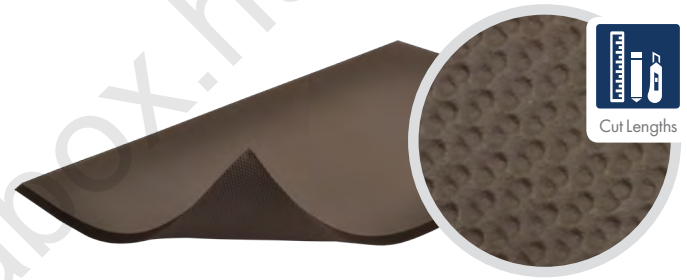
Applications: Reception counters, cashiers stations, assembly lines, laboratories, cooking lines, & bar areas.

Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

440 - SUPERFOAM™ COMFORT™

- Extra soft material for greater comfort and exceptional memory
- Made from a unique nitrile rubber foam blend that resists chemicals, greases, oils, and animal & vegetable fats
- High density material incorporates millions of tiny closed cells that won't absorb liquids
- Aggressive texture on both top and bottom for added traction while keeping mat in place

Stock Sizes	3'x2', 3'x3', 3'x5', 3'x8', 4'x6'
Roll Sizes	2'x75', 3'x75', 4'x75'
Thickness	3/4"
Cut Lengths	2', 3', and 4' widths (up to 75' long)
Colors	 Black




Applications: Areas where occasional overspray and dripping occur such as part wash stations, dishwashing stations, cooking lines, service counters and food prep stations.

Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

454 - ERGO COMFORT™

- Extremely comfortable and durable, made from high quality polyurethane
- A durable, thick outer skin provides protection against wear
- Stain and chemical resistant surface is easy to clean
- Beveled on all 4 sides

Stock Sizes	2'x3', 3'x5'
Thickness	5/8"
Colors	 Black

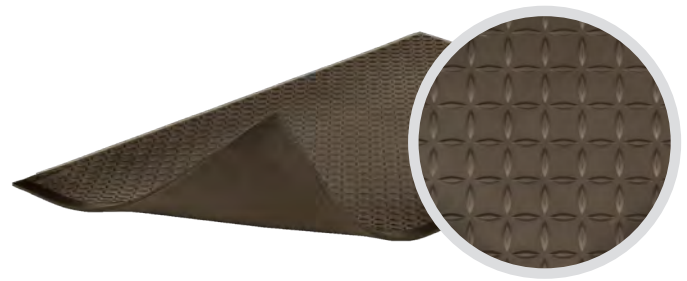

Applications: Reception counters, cashiers stations, assembly lines, laboratories, cooking lines, & bar areas.

Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

ANTI-FATIGUE - Dry (Foam)





ANTI-FATIGUE - Dry (Foam)

DYNA-SHIELD® SERIES

- 419 - DIAMOND SOF-TRED™**
- 417 - BUBBLE SOF-TRED™**
- 406 - RAZORBACK™**
- 413 - BLADE RUNNER™**

- PVC foam provides added cushioning comfort
- Exclusive Dyna-Shield® top surface manufactured directly into the mat for long lasting wear
- Beveled edges on all 4 sides
- Superior tear resistance and tensile strength

Stock Sizes	2'x3', 2'x6', 3'x4', 3'x5', 3'x6', 3'x12'
Roll Sizes	2'x60', 3'x60', 4'x60'
Thickness	1/2"
Cut Lengths	2', 3', and 4' widths (up to 60' long)
Colors	 Black  Black/Yellow

Applications:


Workstations where longer lasting fatigue protection is required.

Performance:


	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				




419 - DIAMOND SOF-TRED™

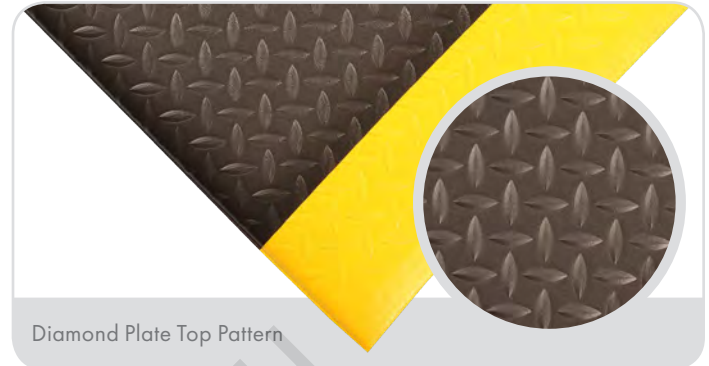


417 - BUBBLE SOF-TRED™

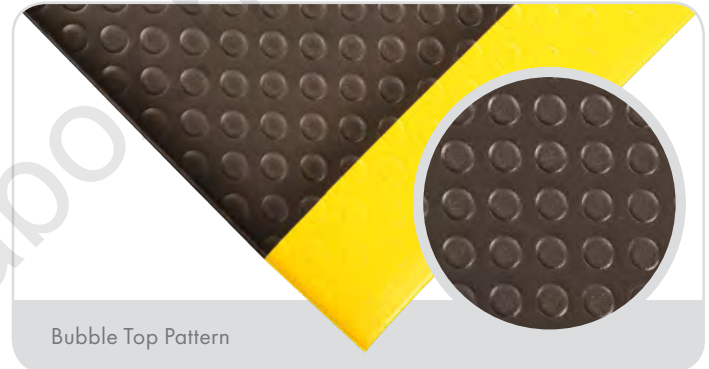

406 - RAZORBACK™

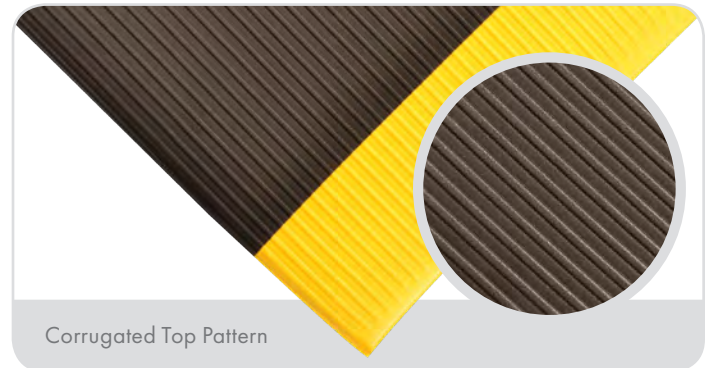

413 - BLADE RUNNER™

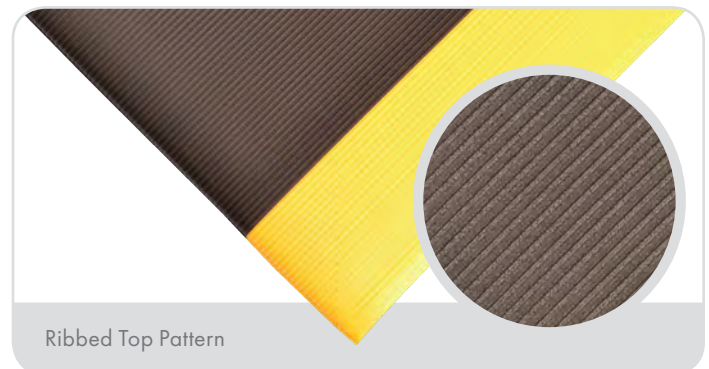

ANTI-FATIGUE - Dry (PVC Foam)






Anti-Fatigue Anti-Slip Cut Lengths Insulation

415 - PEBBLE STEP SOF-TRED™ w/DYNA-SHIELD®

- PVC foam provides added cushioning comfort
- Exclusive Dyna-Shield® pebble top surface provides long lasting wear
- Beveled edges on all 4 sides
- Superior tear resistance and tensile strength

Stock Sizes	2'x3', 2'x6', 3'x4', 3'x5', 3'x6', 3'x12'
Roll Sizes	2'x60', 3'x60', 4'x60'
Thickness	3/8" and 5/8"
Cut Lengths	2', 3', and 4' widths (up to 60' long)
Colors	 Black  Black/Yellow

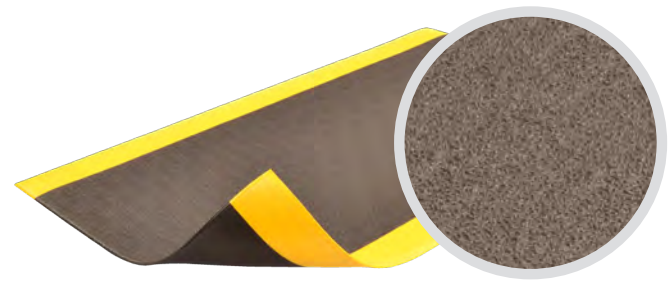


Applications: Work stations where the need for longer lasting fatigue protection is required.

Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

410 - AIRUG®

- Basic anti-fatigue protection provided
- PVC closed cell foam relieves leg and back discomfort; provides a barrier to cold floors
- Beveled edges on all 4 sides

Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x60', 3'x60', 4'x60', 6'x60' (3/8") 2'x30', 3'x30', 4'x30', 6'x30' (5/8")
Thickness	3/8" and 5/8"
Cut Lengths	2', 3', and 4' widths (up to 60' long) (3/8") 2', 3', and 4' widths (up to 30' long) (5/8")
Colors	 Black  Black/Yellow  Grey



Applications: Work stations where anti-fatigue matting is needed at a low cost.

Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

411 - SOF-TRED™

- Basic anti-fatigue protection provided
- PVC closed cell foam relieves leg and back discomfort; provides a barrier to cold floors
- Beveled edges on all 4 sides

Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x60', 3'x60', 4'x60', 6'x60'
Thickness	3/8" and 9/16"
Cut Lengths	2', 3', and 4' widths (up to 60' long)
Colors	 Black  Black/Yellow



Applications: Work stations where anti-fatigue matting is needed at a low cost.

Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

MODULAR WORKSTATION SERIES

NoTrax® mats are created using the highest quality materials in its signature Cushion-Ease®, SkyMaster®, and De-Flex™ series of rubber modular matting. Each series is made to accommodate a variety of work environments and complete with the versatility to solve challenges presented. Whether it is a unique interlocking systems, a variety of edging solutions or specific rubber compound needed these series of mats help create individual work stations, long aisle runs, and unique custom configurations.

Each modular matting series is engineered to rigorous safety standards to provide safe walking surfaces with seamless interlocking systems, beveled edges, and rubber substrates with high coefficient of friction. These features provide assurance that employees are safe. Additionally, these mats are ergonomically designed to provide the necessary amount of anti-fatigue to keep workforces productive. Drainage and oil resistant options are made available for harsher conditions or where containment levels are lower. Flame Retardant rubber compounded mats give piece of mind that no fire hazard exists.

Any workspace is transformed into a more comfortable, safe space with NoTrax® modular workstation matting.



Engineered Modular Rubber Matting Solutions



- An interlocking ergonomic matting system for individual work stations, long runs, unique configurations or wall to wall floors
- Add Safety and Ergonomics to any work space in a versatile matting system
- Easy to work with high quality engineered 3'x3' molded mats and 3' molded ramps
- Cut lines are engineered into the underside of the mat every 12" for easy on-site customization
- Available in natural rubber compound for general purposes

High-Quality Rubber Compounding

NoTrax® branded rubber modular mats are made from mixed synthetic rubbers pressed into NoTrax®'s signature molds. Our rubber is high quality. Our recipes call for specific measured level of hardness to provide a comfortable, yet solid working surface. With over 6 different compounds, we bring to market a rubber to fit the demands of many different work environments. We take quality seriously. No clay fillers or smells of petroleum.

Guide for Ordering Custom Matting Sizes

- Custom designs for any specific work station are possible.
- To order, simply provide a sketch that illustrates the shape, dimensions, and where the ramp edges are required.
- You will receive our CAD drawing for approval.
- Oversized mats are made in sections that interlock on site, to facilitate shipping and handling.

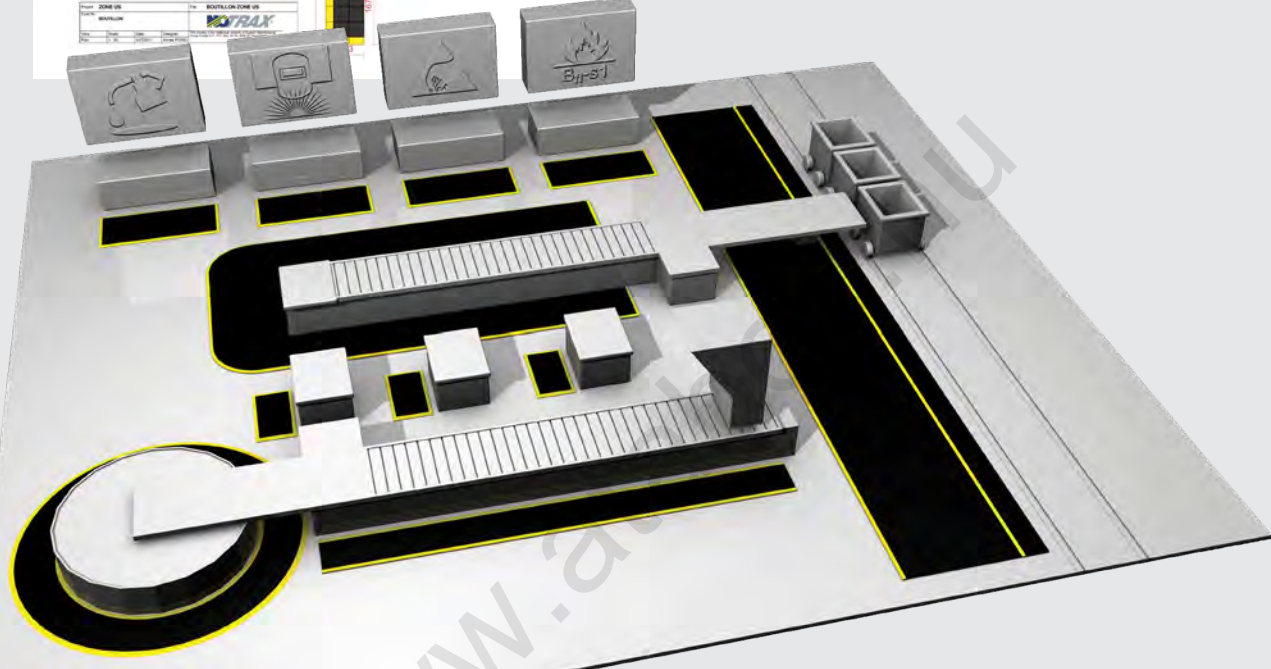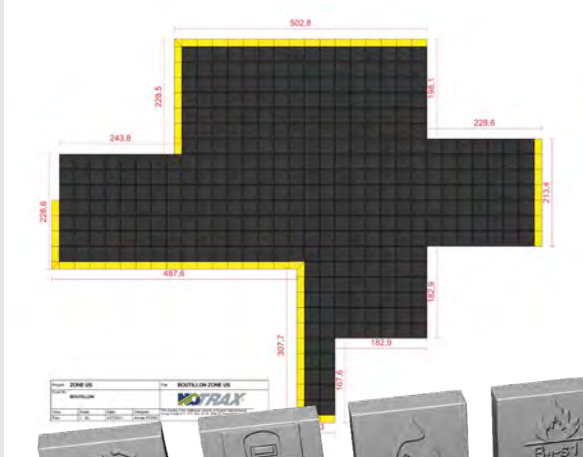



SELECT THE RIGHT MAT FOR YOU

		CUSHION-EASE® SERIES 3'x3'	CUSHION-EASE® SERIES 3'x5'	DE-FLEX™ SERIES 18"x18"	SKYMASTER® SERIES 3'x3'
FEATURES	Natural Rubber	550 (pg 28), 556 (pg 26), 557 (pg 26)	550 (pg 28)	570 (pg 30)	460 (pg 32)
	100% Nitrile Rubber	650 (pg 28), 650FR (pg 28), 656 (pg 26), 656FR (pg 26)	650 (pg 28)	572 (pg 30)	462 (pg 32)
	100% Nitrile GSII™ (Grit)	850 (pg 28), 850FR (pg 28), 856 (pg 26), 856FR (pg 26)	850 (pg 28)		
	Nitrile / Fire Retardant	656FR (pg 26), 856FR (pg 26)			465 (pg 32)
	GSII™ (Grit) Fire Retardant	850FR (pg 28), 856FR (pg 28)			
	ESD Dissipative	558 (pg 26)		573 (pg 30)	463 (pg 32)

ANTI-FATIGUE - Dry (Rubber)

CUSHION-EASE[®] SERIES

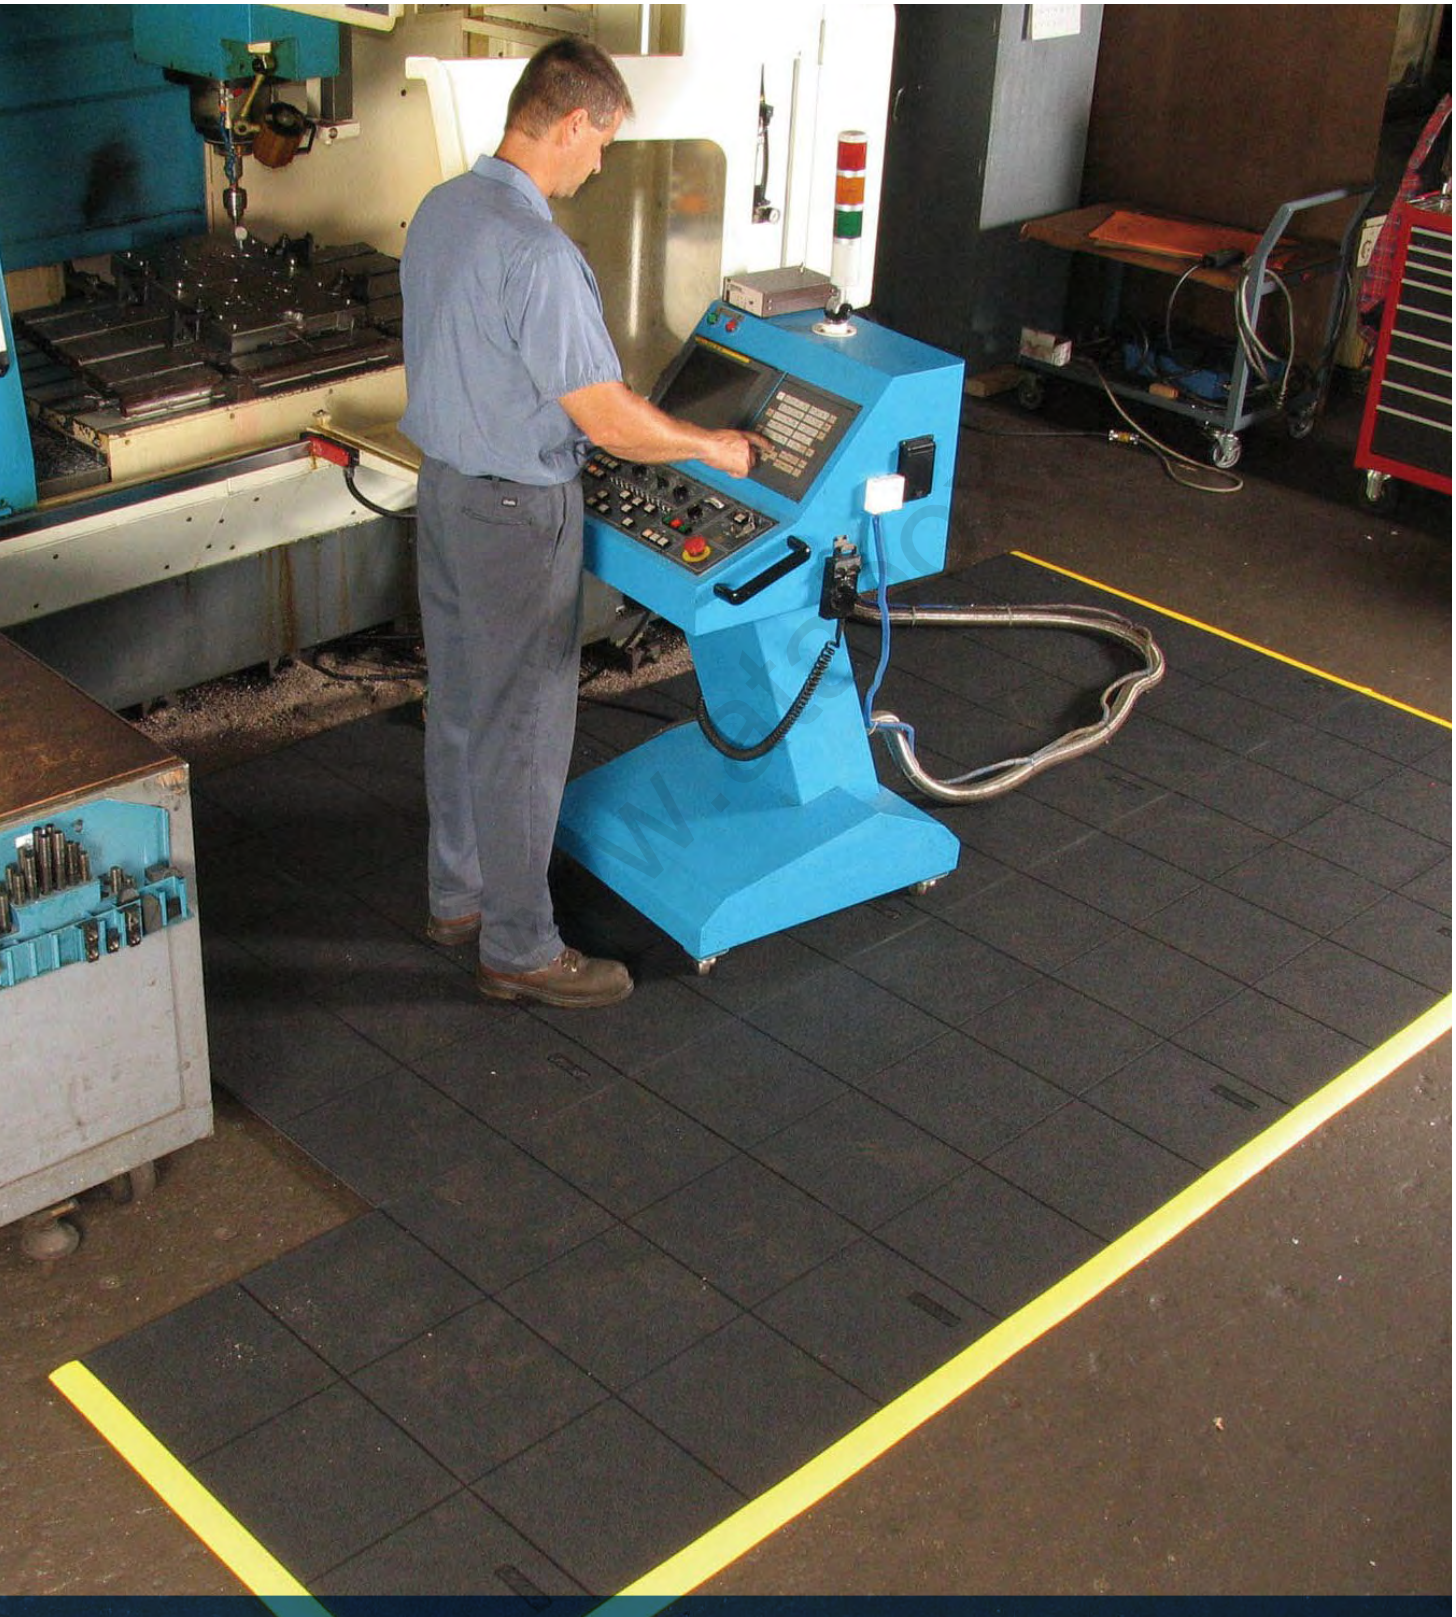



556 CUSHION-EASE® SOLID

- Resilient compound and unique design to provide exceptional fatigue relief
- Easy-to-clean solid top and anti-slip surface



Anti-Slip
Pebble Top Surface

Stock Sizes	3'x3'
Thickness	3/4"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

557 CUSHION-EASE® ERGO™

- Resilient rubber compound
- Bubble design for ergonomic comfort
- Can be mixed and matched with any of the Cushion-Ease® family



Bubble Top
Surface

Stock Sizes	3'x3'
Thickness	3/4"

556 CUSHION-EASE® SOLID Pebble Top Surface




557 CUSHION-EASE® ERGO™ Ergonomic Support



558 CUSHION-EASE® ESD SOLID

- Resilient rubber compound that is easy to clean
- Electrostatic dissipative
- Can be mixed and matched with any of the Cushion-Ease® family



Anti-Slip
Pebble Top Surface

Stock Sizes	3'x3'
Thickness	3/4"



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

NEW!

656/656FR

NIRU® CUSHION-EASE® SOLID

- 100% Nitrile rubber compound provides the highest level of resistance to chemicals, oils and greases
- 656FR Flame retardant option



Anti-Slip
Solid Top Surface

Stock Sizes	3'x3'
Thickness	3/4"



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

856/856FR


NIRU® CUSHION-EASE® GSII™ SOLID

- GSII™ Grit technology provides durability and performance in the harshest environments
- 100% Nitrile rubber provides high levels of resistance to chemicals, oils and greases
- 856FR Flame retardant option



Anti-Slip Grit
Pebble Top Surface


Stock Sizes	3'x3'
Thickness	3/4"



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

Performance:

	Good	Better	Best	Superior
Wear Resistance			556, 557, 558	
Anti-fatigue Performance			656, 656FR, 856, 856FR	
Slip Resistance			556, 557, 558	

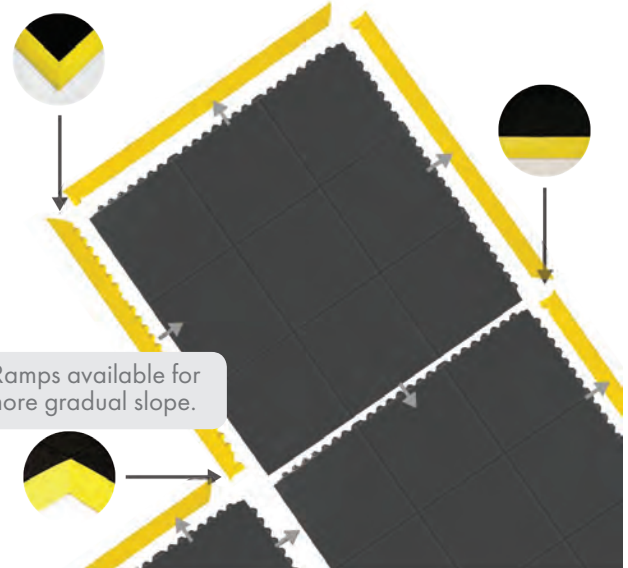

6" Ramps available for a more gradual slope.

M.D. Ramps

M.D. Ramps can be cut to a specific length other than the standard sizes easily.




551 - M.D. RAMP SYSTEM® 2" wide and 3' and 5' lengths

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

552 - M.D.-X RAMP SYSTEM™ 6" wide and 3' lengths **NEW!**

ANTI-FATIGUE - Wet (Rubber) CUSHION-EASE[®] SERIES





550 - CUSHION-EASE®

- Made from a heavy-duty rubber compound
- Multi-nib design offers exceptional fatigue relief and aeration
- Large hole drainage system keeps moisture and debris away
- Easy to snap together modular matting system
- Optional nitrile rubber ramps available for trip-resistant platform (551 M.D. Ramp System®)
- Can be mixed/matched with any of the Cushion-Ease® family mats

Stock Sizes	3'x3', 3'x5'
Thickness	3/4"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



650 - NIRU® CUSHION-EASE® 650FR - NIRU® CUSHION-EASE® FIRE RETARDANT

- 100% Nitrile rubber compound for resistance to commonly found chemicals, cutting fluids, oils, greases, and animal fats
- Multi-nib design offers exceptional fatigue relief and aeration
- Large hole drainage system keeps moisture and debris away
- Easy to snap together modular matting system
- Optional nitrile rubber ramps available for trip-resistant platform (551 M.D. Ramp System®)
- Can be mixed/matched with any of the Cushion-Ease® family mats
- 650SFR flame retardant version

Stock Sizes	3'x3', 3'x5'
Thickness	3/4"



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

Applications:

Wet environments where comfort and durability are critical. The GSII™ or Niru® versions are available for environments where industrial chemicals, oils, greases, and animal fats are often found. Where custom configurations are a consideration.




Performance:

	Good	Better	Best	Superior
Wear Resistance		550, 650, 650FR, 850, 850FR		
Anti-fatigue Performance	550, 650, 650FR, 850, 850FR			
Slip Resistance		550, 650, 650FR, 850, 850FR		

850 - NIRU® CUSHION-EASE® GSII™ 850FR - NIRU® CUSHION-EASE® GSII™ FIRE RETARDANT

- 100% Nitrile rubber compound for resistance to commonly found chemicals, cutting fluids, oils, greases, and animal fats
- Multi-nib design offers exceptional fatigue relief and aeration
- Large hole drainage system keeps moisture and debris away
- Easy to snap together modular matting system
- Optional nitrile rubber ramps available for trip-resistant platform (551 M.D. Ramp System®)
- Can be mixed/matched with any of the Cushion-Ease® family mats
- 850FR flame retardant version
- GSII™ technology offers the ultimate in durability and performance in the harshest environments
- Silicon Carbide grit surface provides long lasting traction

Stock Sizes	3'x3', 3'x5'*
	*850 only
Thickness	3/4"



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



M.D. Ramps

M.D. Ramps can be cut to a specific length other than the standard sizes easily.



551 - M.D. RAMP SYSTEM® 2" wide and 3' and 5' lengths

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

552 - M.D.-X RAMP SYSTEM™ 6" wide and 3' lengths **NEW!**

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

ANTI-FATIGUE - Dry (Rubber)

DE-FLEX™ SERIES





Anti-Fatigue



Heavy Traffic



Anti-Slip



Floor Protection



Insulation



Modular System

570 - DE-FLEX™

- Natural rubber compound
- General purpose applications

Stock Sizes	18"x18"
Thickness	3/4"



Anti-Slip
Diamond Top Surface

NEW!

570 DE-FLEX™



572 DE-FLEX™ NIRU®

572 - DE-FLEX™ NIRU®

- Nitrile rubber compound
- Resistant to most industrial oils

Stock Sizes	18"x18"
Thickness	3/4"



Oil/Grease
Resistant



Anti-Slip
Diamond Top Surface

NEW!

573 - DE-FLEX™ ESD

- Natural rubber compound
- ESD Static Dissipative, measured resistance $10^6 - 10^9 \Omega$
- Optional grounding cord available

Stock Sizes	18"x18"
Thickness	3/4"



Non-Conductive



Anti-Slip
Diamond Top Surface

NEW!

Applications:


Heavy duty industrial areas where custom configurations are needed for coverage.

Performance:

	Good	Better	Best	Superior
Wear Resistance			570,572,573	
Anti-fatigue Performance			570,572,573	
Slip Resistance			570,572,573	



DE-FLEX™ - Profile View

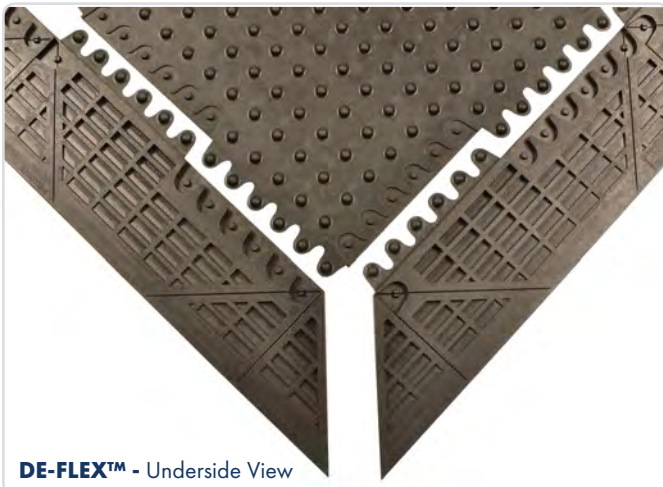

DE-FLEX™ - Underside View

DE-FLEX™ Ramps

De-Flex™ Ramps can be cut to a specific length other than the standard sizes. Simple assembly with no male or female specific ramps.



Yellow



Black

571 - DE-FLEX™ RAMPS

6"x36" straight available

NEW!



DE-FLEX™ - Connections

ANTI-FATIGUE - Dry (Rubber)

SKYMASTER[®] HD SERIES






460 - SKYMASTER® HD

- Made of 100% heavy duty natural rubber compound

Stock Sizes	3'x3'
Thickness	5/8"

Application: Dry industrial environments.

NEW!

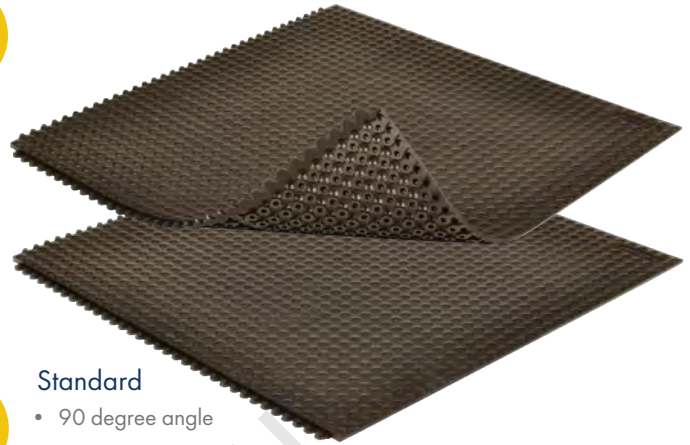

Standard
• 90 degree angle

462 - SKYMASTER® HD NIRU®

- Made of 100% nitrile rubber
- Resistant to industrial oils

Stock Sizes	3'x3'
Thickness	5/8"



Application: Dry industrial environments with exposure to oil.

NEW!

Performance:

	Good	Better	Best	Superior
Wear Resistance	██████████			██████████
Anti-fatigue Performance	██████████			██████████
Slip Resistance	██████████			██████████

463 - SKYMASTER® HD ESD


- Made of 100% heavy duty natural rubber compound
- ESD Dissipative, measured resistance $10^6 - 10^9 \Omega$
- Grounding cord available, not required

Stock Sizes	3'x3'
Thickness	5/8"



Application: Use where Electro Static Discharge (ESD) could be present.


NEW!

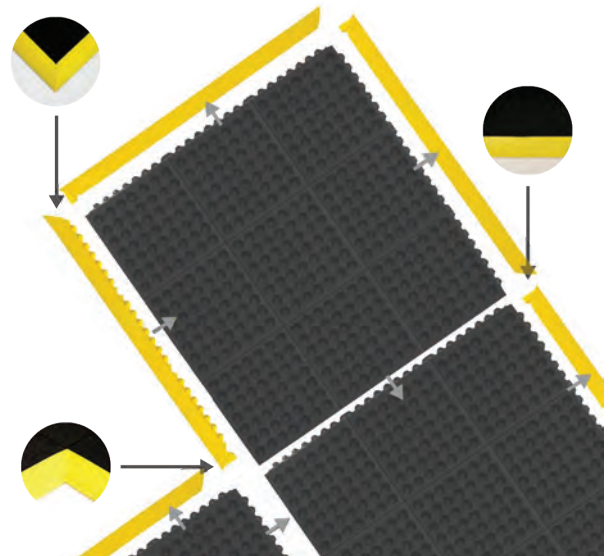

465 - SKYMASTER® HD NIRU® FR

- Made from 100% nitrile rubber compound
- Resistant to most industrial oils
- Fire Retardant

Stock Sizes	3'x3'
Thickness	5/8"



Application: Welding applications.

NEW!

469 - SAFETY LINE 4" wide and 36" long

NEW!

461 - SKYMASTER® HD RAMPS 2" wide and 36" long

NEW!



Yellow



Black



Anti-Fatigue



Anti-Slip



Floor Protection



Heavy Traffic




Insulation




Modular System

SKYMASTER® - Curves

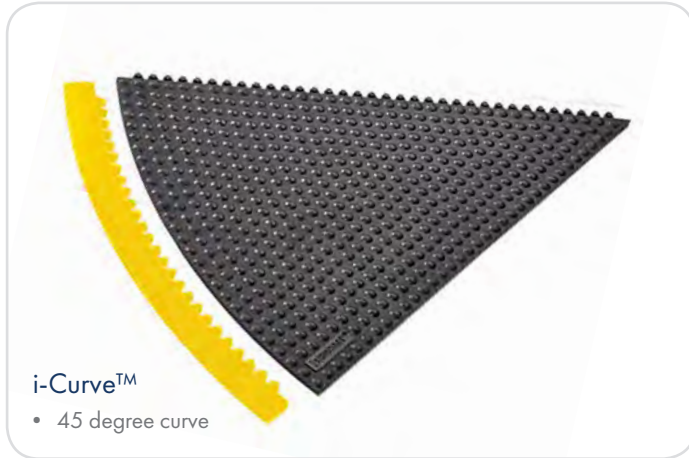

i-Curve™

- 45 degree curve

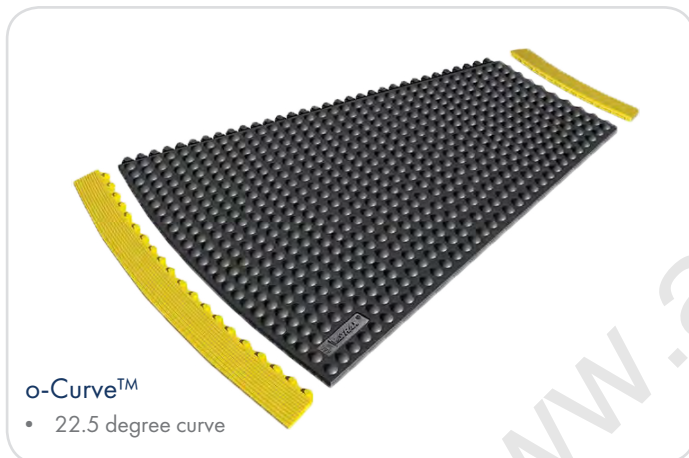

o-Curve™

- 22.5 degree curve

Performance:

Good Better Best Superior

Wear Resistance	██████████			██████████
Anti-fatigue Performance	██████████			██████████
Slip Resistance	██████████			██████████



NEW!

430 - SKYMASTER® HD i-CURVE™
446 - SKYMASTER® HD o-CURVE™

- Made of 100% heavy duty natural rubber compound

Stock Sizes	3'x3'
Thickness	5/8"

Application: Dry industrial environments.

NEW!

432 - SKYMASTER® HD i-CURVE™ NIRU®
442 - SKYMASTER® HD o-CURVE™ NIRU®

- Made of 100% nitrile rubber
- Resistant to industrial oils

Stock Sizes	3'x3'
Thickness	5/8"




Application: Dry industrial environments with exposure to oil.

NEW!

433 - SKYMASTER® HD i-CURVE™ ESD
443 - SKYMASTER® HD o-CURVE™ ESD

- Made of 100% heavy duty natural rubber compound
- ESD Dissipative, measured resistance $10^6 - 10^9 \Omega$

Stock Sizes	3'x3'
Thickness	5/8"



Application: Use where Electro Static Discharge (ESD) could be present.

NEW!

435 - SKYMASTER® HD i-CURVE™ NIRU® FR
445 - SKYMASTER® HD o-CURVE™ NIRU® FR

- Made from 100% nitrile rubber compound
- Resistant to most industrial oils
- Fire Retardant

Stock Sizes	3'x3'
Thickness	5/8"





Application: Welding applications.

431 - i-CURVE™ Ramp 2" wide, 45° curve **NEW!**

481 - o-CURVE™ Ramp 2" wide, 22.5° curve **NEW!**





WORKSTATIONS - Solid (Rubber)

455 - SKYSTEP™ 457 - SKYSTEP™ ESD

NEW!

- Rubber molded, air-pocket underside anti-fatigue mat
- Beveled edges on all four sides
- Designed to suction to the ground to prevent shifting while trapping air in its chambers
- (455) For general purpose applications
- (457) ESD Static Dissipative, measured resistance $10^5 - 10^7 \Omega$

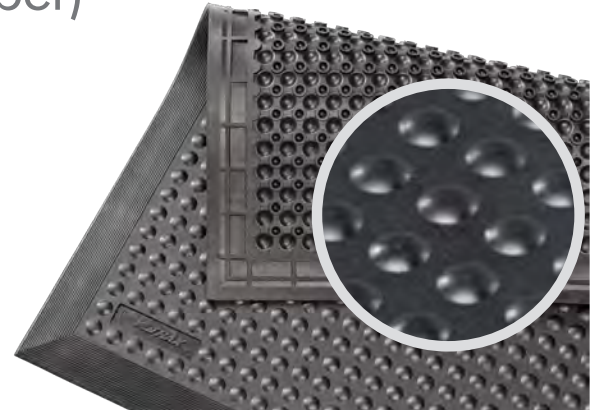

Stock Sizes	2'x3', 3'x4', 3'x5'
Thickness	5/8"
Colors	 Black


Applications: Dry industrial stand-alone workstations where electrostatic discharge may be present.

Performance:



447 - COMFORT-EZE™

- Rubber molded, anti-fatigue mat
- Beveled edges on all four sides
- Bubbles are molded on an offset on the top and bottom of the mat to maximize flex and enhance the ergonomic benefit

Stock Sizes	24"x36", 30"x60", 30"x10' *Consists of multiple mats bonded together
Thickness	3/8"
Colors	 Black




Applications:

- Dry applications where there is a good deal of pivoting required.
- Packaging stations
 - Shipping areas
 - Quality inspection areas
 - Light to medium duty dry areas

Performance:



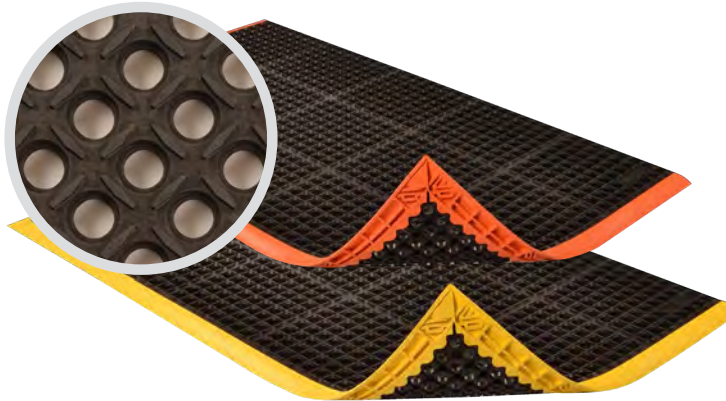

SAFETY/ANTI-FATIGUE - Wet (Rubber)



549 - SAFETY STANCE®


- Resilient natural rubber compound withstands industrial cutting oils and chemicals
- Large hole configuration facilitates drainage and resists clogging while mini-diamond studs on top surface minimize slippage
- Nitrile beveled borders are affixed to the mat and are available on 3 or 4 sides. Prevents swelling/curling

Stock Sizes (3-sided borders)	26"x40", 38"x40", 38"x64", 38"x124"
Stock Sizes (4-sided borders)	28"x40", 40"x40", 40"x64", 40"x124"
Thickness	7/8"
Colors	 Black/Orange  Black/Yellow

Applications:

All heavy industrial environments and work cells that require worker protection from fatigue, spillage of liquids, heavy cart traffic.

Performance:




Applications:

Any heavy Industrial environment or work cell that needs to offer worker protection from fatigue and spillage of liquids. Food prep or bar areas where workers stand for long periods of time.

543 - CUSHION-TRED™

- Made from a heavy-duty resilient rubber compound
- Flexible cushioning design provides maximum comfort
- Large hole configuration facilitates drainage and resists clogging
- Square edges on all 4 sides

Stock Sizes	2'x3', 3'x3', 3'x5'
Thickness	7/8"
Colors	 Black

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

Performance:







SAFETY/ANTI-FATIGUE - Wet (Rubber)

562 - SANITOP®

- Durable rubber compound
- Molded alternating large/small hole drainage system keeps moisture and debris away from work area
- Raised pattern surrounds large holes to channel drainage and provide worker traction
- Beveled ramps on all 4 sides
- Available in 2 versions:
 - Black grease resistant mat
 - Red grease-proof nitrile mat



Stock Sizes	3'x5', 3'x10'*, 3'x20'*
	*Consists of multiple mats bonded together
Thickness	1/2"
Colors	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  Black </div> <div style="text-align: center;">  Red </div> </div>

Applications: Wet environments that require basic fatigue relief.



Performance:

	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				




504 - BEVELED DRAIN-STEP™

- Economic general purpose black rubber compound
- Large hole drainage design keeps liquids and debris away from worker platform
- Beveled edges on all 4 sides

Stock Sizes	3'x5'
Thickness	1/2"
Colors	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  Black </div> <div style="text-align: center;">  Red </div> </div>

Performance:

	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

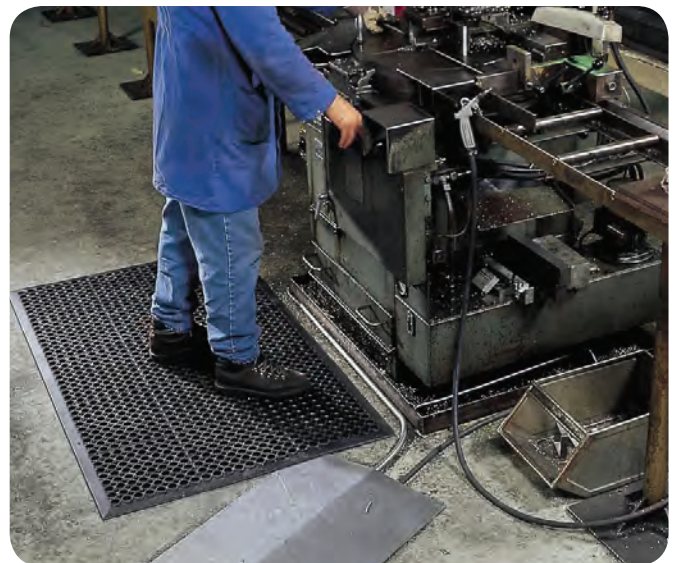

Applications: Wet environments that require basic fatigue relief.

MODULAR WORKSTATIONS & TILES - Dry/Wet





Anti-Fatigue



Anti-Slip



Cleaning



Custom



Drainage



Oil/Grease Resistant

620 - DIAMOND FLEX-LOK™ 621 - DIAMOND FLEX-LOK™ SOLID

- PVC modular interlocking tile with raised diamond top surface
- Black tiles & ramps made from 100% recycled PVC
- Ergonomic, multi-tiered design
- Unique post-in-hole connection system
- Beveled ramps and corners
- 620 - Drainage holes
- 621 - Solid top

Sizes	12"x12" Tiles, 6"x12" Ramps, 6"x6" Corners			
Assembled Stock Sizes	30"x36", 30"x48", 30"x60", 30"x72", 30"x96", 42"x72", 42"x96", 42"x120"			
Thickness	1"			
Colors	Assembled		Tiles	Ramps/Corners
	Black	Black/Yellow	Black	Black Yellow

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



620

621

Applications:


Where anti-fatigue, drainage, and slip resistance are all a priority. Where custom configurations are a consideration.

520 - CUSHION-LOK™ 522 - CUSHION-LOK™ w/GRIP-STEP®

- PVC based workstation mat made from 100% recycled materials (black only)
- 520 - Drainage top
- 522 - Gritted drainage top
- Porthole drainage system
- Beveled ramps and corners available
- Tiles use dovetail connection system

Sizes	12"x12" Tiles, 6"x12" Ramps, 6"x6" Corners			
Assembled Stock Sizes	30"x36", 30"x48", 30"x60", 30"x72", 30"x96", 42"x72", 42"x96", 42"x120"			
Thickness	7/8"			
Colors	Assembled		Tiles	Ramps/Corners
	Black/Yellow	Black	Black	Black Yellow

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

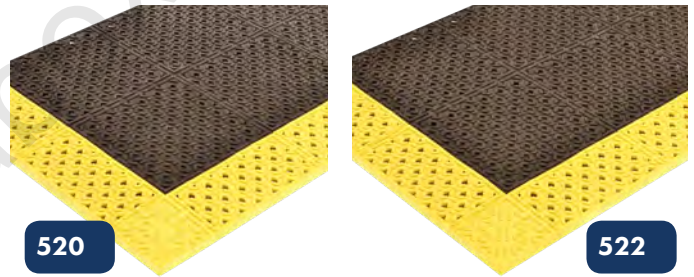

520

522

Applications:

Wet environments where drainage and slip resistance are a priority. Where custom configurations are a consideration.

523 - MODULAR LOK-TYLE™

- Light-weight PVC, modular, drainage tiles
- Beveled ramps and corners available
- 100% recycled PVC (Black only)
- NSF tested and certified (as shelf liners)



Anti-Static




Food Processing



Food Service

Sizes	12"x12" Tile, 2"x12" Ramp, 2"x2" Corners			
Thickness	1/2"			
Colors				
	Black	Green	Blue	Yellow

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

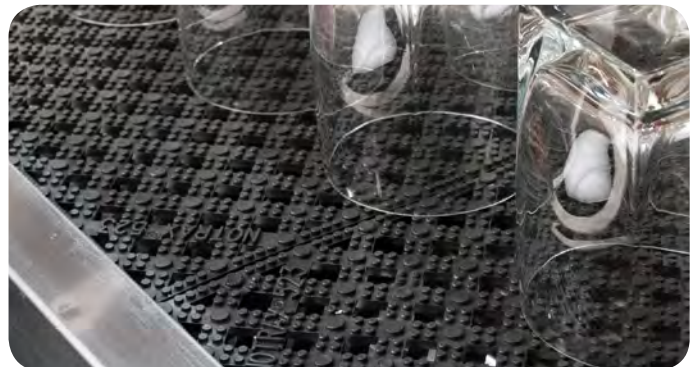


Applications:

- Locker rooms
- Shower areas
- Spa Areas
- Restaurants
- Shelving
- Bar areas

INDUSTRIAL RUNNERS - Wet





531 - SAFETY GRID™


- Resilient vinyl construction
- Saw-tooth texture for added traction

Roll Sizes	2'x40', 3'x40', 4'x40'
Thickness	1/2"
Cut Lengths	2', 3', and 4' widths (up to 40' long)
Colors	   
	Black Black/Yellow Grey Blue

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

420 - CUSHION-DEK™

- Tough PVC compound with raised pyramid design to enhance traction
- Drainage system for use in wet areas


Stock Sizes	2'x3', 2'x6', 3'x4', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	2'x30', 3'x30', 4'x30'
Thickness	7/16"
Cut Lengths	2', 3' and 4' widths (up to 30' long)
Colors	
	Black

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

755 - NIRU® VERSA RUNNER™

- 100% Nitrile rubber compound
- Slotted perforations for drainage
- Ribbed underside channels liquid away from the mat
- MicroStop™ anti-microbial rubber compound





Stock Sizes	2'x3', 3'x4'
Roll Sizes	2'x60', 3'x60', 4'x60'
Thickness	3/8"
Cut Lengths	2', 3' and 4' widths (up to 60' long)
Colors	
	Black

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

T23 - MULTI-MAT II™

- Non-skid surface for added traction
- Black natural rubber & red Nitrile available
- Reversible for extended life
- Low profile for easy cart access


NEW!

Stock Sizes	2'x8', 2'x3', 3'x4', 3'x8', 4'x8'
Roll Sizes	2'x32', 2'x60', 3'x32', 3'x64', 4'x32', 4'x64'
Thickness	3/8"
Colors	 
	Black Red




531 SAFETY GRID™

Applications:
Elevated runs, locker rooms, shower areas.

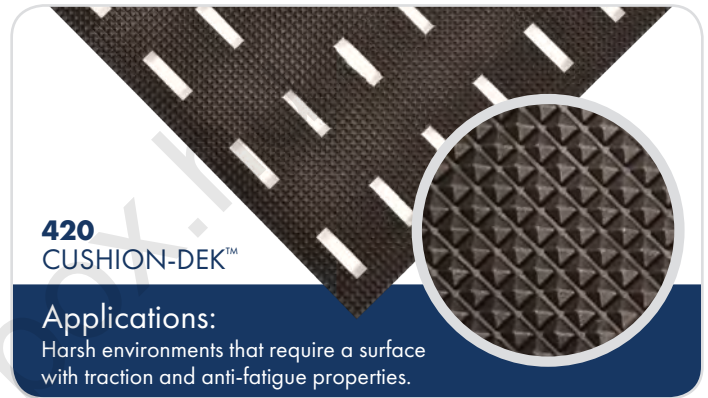

420 CUSHION-DEK™

Applications:
Harsh environments that require a surface with traction and anti-fatigue properties.

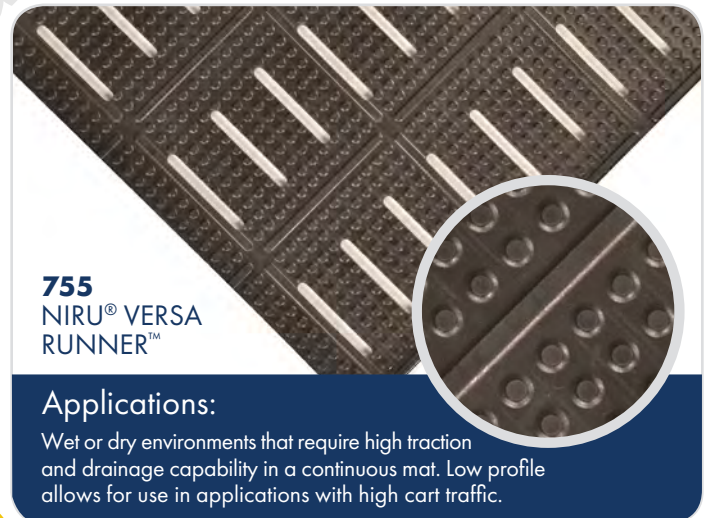

755 NIRU® VERSA RUNNER™

Applications:
Wet or dry environments that require high traction and drainage capability in a continuous mat. Low profile allows for use in applications with high cart traffic.



T23 MULTI-MAT II™

Applications:
Longer runs or workstation environments, drainage, some exposure to grease, oil and water, anti-slip surface, low profile for cart traffic.



Anti-Slip



Cold Resistant



Cut Lengths



Floor Protection




Insulation


INDUSTRIAL RUNNERS - Dry

NEW!

765 - DEEP FREEZE MAT™

- Raised knob solid top surface that enhances traction
- Tested to withstand temperatures to -40 Fahrenheit
- MicroStop™ anti-microbial rubber compound
- Low profile for easy cart traffic

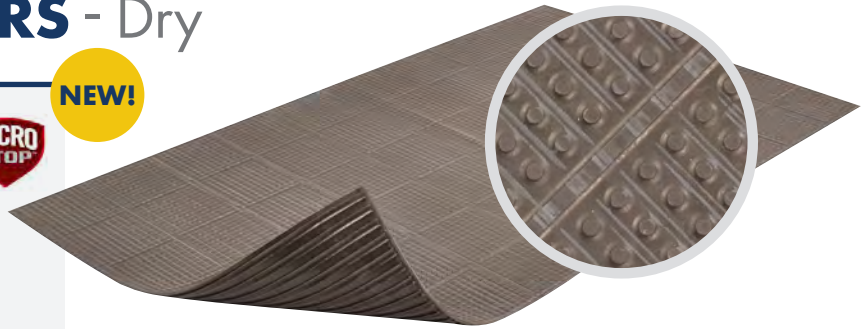

Stock Sizes	2'x5', 2'x8', 3'x5', 3'x8', 4'x5', 4'x8'
Thickness	3/8"
Cut Lengths	2', 3', and 4' widths (up to 60')
Colors	 Black

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

Applications: Meat lockers, walk-in freezers, specialty freezers.

Performance:



Anti-Fatigue



Custom




Insulation



Welding

758 - NIRU® KNOB-TOP RUNNER™

- 100% Nitrile rubber compound
- Solid-top slip resistant surface
- Ribbed underside channels liquid away from the mat
- MicroStop™ anti-microbial rubber compound

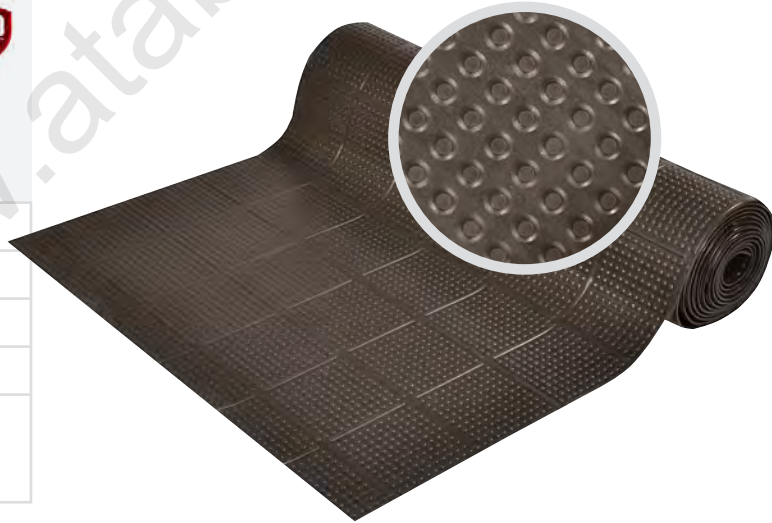


Stock Sizes	2'x3', 3'x4'
Roll Sizes	2'x60', 3'x60', 4'x60'
Thickness	1/4"
Cut Lengths	2', 3', and 4' widths (up to 60')
Colors	 Black

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

Applications:

Wet or dry environments that require high traction and drainage capability in a continuous mat.

Performance:





Anti-Slip



Cut Lengths



Floor Protection




Insulation


INDUSTRIAL RUNNERS - Dry

730 - V-GROOVE CORRUGATED RUNNER™ - VINYL 750 - V-GROOVE CORRUGATED RUNNER™ - RUBBER

- Corrugated rib-tooth design improves traction
- Insulates floor and creates a silencing effect
- Low profile allows for easy on/off cart traffic
- Made from 100% recycled materials

Roll Sizes (730)	2'x105', 3'x105', 4'x105'
Roll Sizes (750)	2'x75', 3'x75', 4'x75', 6'x75', 2'x150', 3'x150', 4'x150'
Thickness	1/8"
Cut Lengths (730)	2', 3', and 4' widths (up to 105' long)
Cut Lengths (750)	2', 3', 4', and 6' widths (up to 150' long)
Colors	 Black

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

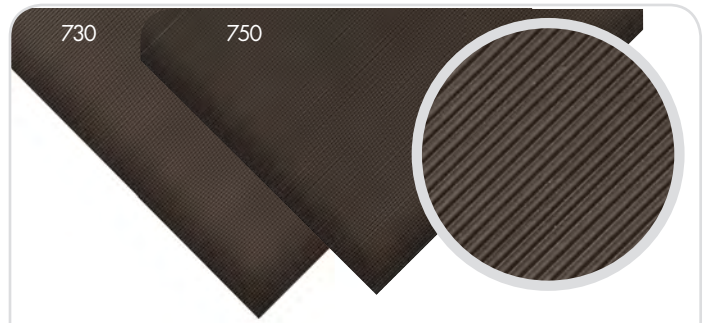

Applications:

Where safety and slip protection is needed; aisle ways, warehouses, vending areas, liner for maintenance and tool carts.

Performance:

	Good	Better	Best	Superior
Wear Resistance		730,750		
Anti-fatigue Performance	730,750			
Slip Resistance		730,750		

735 - ROUND RIB RUNNER

- 100% recycled vinyl materials
- Wide-spaced rounded rib design
- Low profile allows for easy on/off cart traffic

Roll Sizes	2'x105', 3'x105', 4'x105'
Thickness	1/8"
Cut Lengths	2', 3', and 4' widths (up to 105' long)
Colors	 Black  Grey

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



Application:

Aisle ways, warehouses, vending areas, easy on/off cart traffic.

Performance:

	Good	Better	Best	Superior
Wear Resistance		735,737		
Anti-fatigue Performance	735,737			
Slip Resistance		735,737		

737 - DIAMOND PLATE RUNNER

- 100% recycled vinyl materials
- Diamond-plate embossed top surface
- Low profile allows for easy on/off cart traffic

Roll Sizes	2'x75', 3'x75', 4'x75', 5'x75'
Thickness	5/32"
Cut Lengths	2', 3', 4', and 5' (up to 150' long)
Colors	 Black  Grey*  Black/Yellow <small>*Not available in 5' widths</small>

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78


ELECTROSTATIC DISCHARGE (ESD) MATTING




ESD SAFETY/ANTI-STATIC - Dry

825 - CUSHION STAT™ w/DYNA-SHIELD®

- Static dissipative PVC sponge
- Absorbs static electricity keeping sensitive electronic circuitry safe
- Dyna-Shield® increases strength and provides long lasting wear
- Beveled on all 4 sides
- RG 10⁶ - 10⁹ Ω; RP 10⁶ - 10⁹ Ω
- Grounding cord available, not required

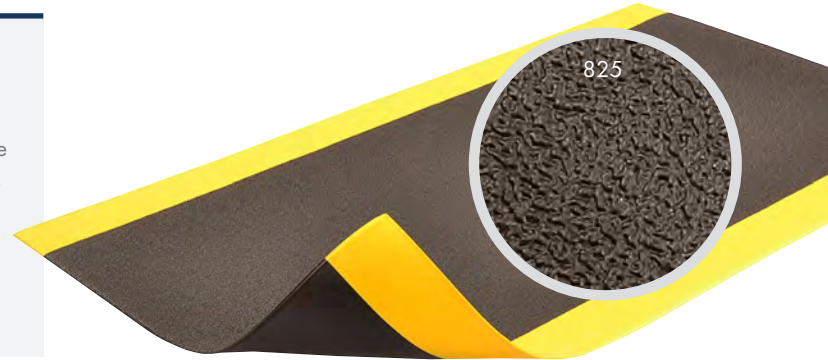


Stock Sizes	2'x3', 3'x5', 3'x10'
Roll Sizes	3'x60', 4'x60'
Thickness	3/8"
Cut Lengths	3' and 4' widths (up to 60' long)
Colors	 Black  Grey  Black/Yellow

Applications: Assembly or testing areas for circuitry: computers, chips, electronics of all kinds.

Performance:

	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				





827 - ANTI-STAT P.O.P.™

NEW!

Vinyl work surface that dissipates static from conductive items placed on it. Protects table and keeps sensitive components safe from damaging static shocks. Smooth top surface that is abrasion resistant and easy to wipe clean.

- Single layer vinyl work surface that dissipates static to keep sensitive components safe
- Smooth top surface
- ESD Static Dissipative
- Meets EOS/ESD-S4, measured resistance for work surfaces RG 10⁷ Ω 10 and RP 10⁸ Ω
- Electrostatic charge (walking test), meets ISO6356 and EN1815
- Grounding cord available, not required

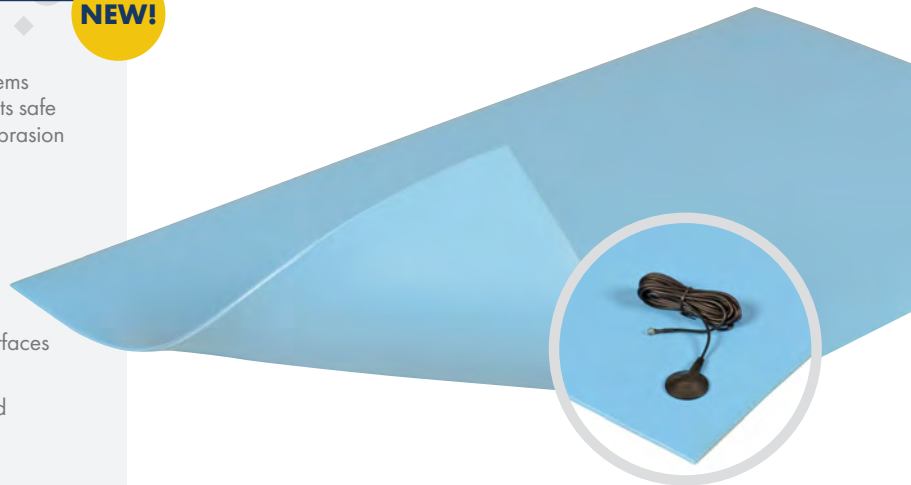

Roll Sizes	30"x40', 3'x40'
Thickness	1/4"
Cut Lengths	2', 30" and 3' widths (up to 60' long)
Colors	 Blue

Applications: Tabletop work surfaces.

Performance:

	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				



Anti-Fatigue



Anti-Slip



Anti-static



Floor Protection



Heavy Traffic



Insulation



Modular

ESD SAFETY/ANTI-STATIC - Dry

558 - CUSHION-EASE® ESD SOLID

NEW!

- ESD static dissipative
- Anti-slip pebble surface
- High quality ESD rubber compound mat
- Modular mat with available ramps
- (see pg25)
- RG $10^6 - 10^9 \Omega$; RP $10^6 - 10^9 \Omega$
- Grounding cord available, not required

Stock Sizes 3'x3'

Thickness 3/4"

Colors



Black

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

558 - CUSHION EASE® ESD SOLID



Applications:
Automated manufacturing lines.

573 - DE-FLEX™ ESD

NEW!

- ESD static dissipative
- Diamond plate surface
- High quality ESD rubber compound mat
- Modular mat with available ramps
- (see pg29)
- RG $10^6 - 10^9 \Omega$; RP $10^6 - 10^9 \Omega$
- Grounding cord available, not required

Stock Sizes 18"x18"

Thickness 3/4"

Colors



Black

573 - DE-FLEX™ ESD



Applications:
Assembly, test equipment, and inspection stations.

463 - SKYMASTER® HD ESD

NEW!

- ESD static dissipative
- Bubble design with suction cup backing
- High quality ESD rubber compound mat
- Modular mat with available ramps (see pg31)
- RG $10^6 - 10^9 \Omega$; RP $10^6 - 10^9 \Omega$

Stock Sizes 3'x3'

Thickness 5/8"

Colors



Black

463 - SKYMASTER® HD ESD



Applications:
Electronic manufacturing and laboratories.

457 - SKYSTEP™ ESD

- ESD static dissipative
- Bubble design with suction cup backing
- High quality ESD rubber compound mat
- Beveled edges on all 4 sides
- RG $10^5 - 10^7 \Omega$; RP $10^5 - 10^7 \Omega$
- Grounding cord available, not required

Stock Sizes 2'x3', 3'x4', 3'x5'

Thickness 5/8"

Colors



Black

457 - SKYSTEP™ ESD



Applications:
Stand alone inspection stations and dry industrial workstations.


ESD SAFETY/ANTI-STATIC - Dry

826 - DIAMOND STAT™ 927 - DIAMOND STAT™ GRANDE™

NEW!

- Electrically conductive PVC diamond plate top surface is combined with a dense closed cell PVC foam base
- UniFusion™ bond guaranteed for the life of the mat
- RedStop™ non-slip backing to reduce mat slippage
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)
- RG 10⁴ - 10⁶ Ω; RP 10⁴ - 10⁶ Ω
- Grounding cord included, required
- Certified by the NFSI (National Floor Safety Institute)



Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x75', 3'x75', 4'x75'
Thickness	9/16" (826), 1" (927)
Cut Lengths	2', 3' and 4' widths (up to 75' long)
Colors	 Black

Applications: Assembly or testing areas for circuitry: computers, chips, electronics of all kinds.

Performance:


	Good	Better	Best	Superior
Wear Resistance			826	927
Anti-fatigue Performance			826	927
Slip Resistance			826	927


WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

926 - SMOOTH STAT™

NEW!

- Electrically conductive PVC smooth top surface is combined with a dense closed cell PVC foam base
- UniFusion™ bond guaranteed for the life of the mat
- RedStop™ non-slip backing to reduce mat slippage
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)
- RG 10⁴ - 10⁶ Ω; RP 10⁴ - 10⁶ Ω
- Grounding cord included, required
- Certified by the NFSI (National Floor Safety Institute)

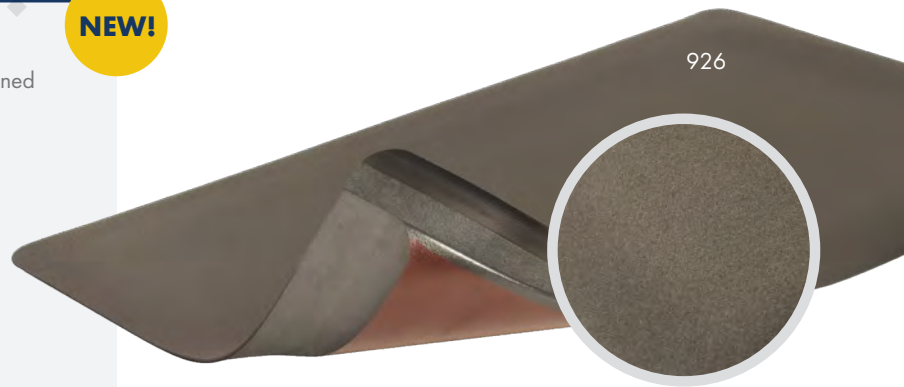

Stock Sizes	2'x3', 3'x5'
Roll Sizes	3'x75'
Thickness	9/16"
Cut Lengths	3' wide (up to 75' long)
Colors	 Black

Applications: Assembly or testing areas for circuitry: computers, chips, electronics of all kinds.

Performance:

	Good	Better	Best	Superior
Wear Resistance			926	
Anti-fatigue Performance			926	
Slip Resistance			926	

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

SPECIALTY/SANITATION - Dry



Applications:


Laboratories, operating rooms, hazmat and radiology.

448 - AUTOCLAVEABLE BUBBLE MAT

- Rubber Anti-fatigue mat with offset bubble design
- Anti-microbial formula resists most Gram positive and Gram negative bacteria
- Durable rubber top surface easy to wipe clean using most hospital grade cleaners and autoclaves
- Beveled on all 4 sides

Stock Sizes	2'x3'
Thickness	3/8"
Colors	 Grey

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78






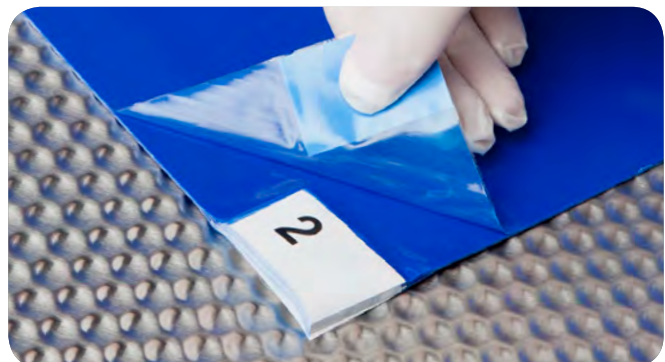
Applications:

Life sciences, electronics manufacturing, clean room entrance.

080 - CLEAN-STEP™ TACKY MAT

- Traps and keeps out impurities, dust, and particulates
- Adhesive surface grabs and holds soil matter with no transfer
- Peel away sheets for fresh, clean surface

Stock Sizes	18"x36", 18"x45", 24"x36", 26"x45"
Full Case	4 Mats/120 Sheets (30 sheets per mat)
Colors	 Blue  Grey  White





Cleaning




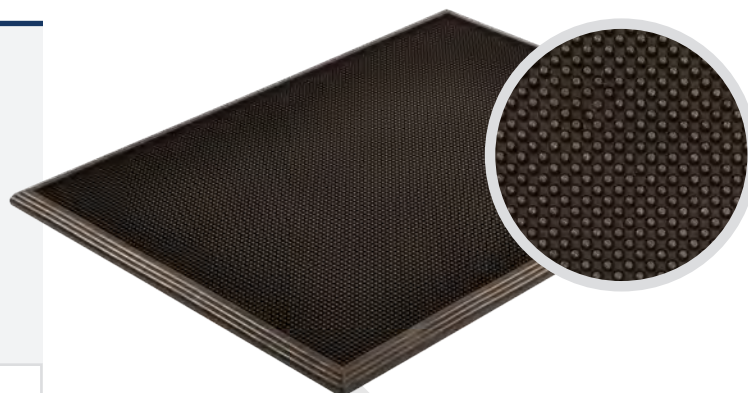
Food Processing

SPECIALTY/SANITATION - Wet/Dry

346 - SANI-TRAX®

- Tough rubber compound resists most chemicals and variations in temperature
- Thick containment border allows mat to hold a full gallon of disinfectant solution
- Thousands of flexible rubber fingers provide scrubbing action
- Suction cups on underside help to minimize mat movement
- Containment wall height: 3/4"

Stock Sizes	24"x32"
Thickness	3/4"
Colors	 Black





Applications:

Entrances to any room where spread of contamination needs to be limited: food processing, agriculture.

351 - SANI-TRAX® PLUS

- Tough rubber compound resists most chemicals and variations in temperature
- Thick containment border allows mat to hold 5 gallons of disinfectant solution
- Thousands of flexible rubber fingers provide scrubbing action
- Suction cups on underside help to minimize mat movement
- Containment wall height: 2 1/2"

Stock Sizes	32"x39"
Thickness	2 1/2"
Colors	  Black Black/Yellow



Applications:

Food processing, agriculture



HIGH-VOLTAGE SWITCHBOARD MATTING





Anti-Slip



Cut Lengths



Floor Protection





Non-Conductive

HIGH-VOLTAGE SWITCHBOARD MATTING


830 - SWITCHBOARD MATTING - VINYL 831 - SWITCHBOARD MATTING - DIAMOND

- Insulated matting engineered to protect workers from electric shock
- Electrically Insulative Type 2 PVC compound
- Class 2 Di-electric Strength: 30,000 volts
- Proof test of 20,000 volts
- Recommended maximum use voltage: 17,000
- Each square foot of this matting is tested in conformance with ANSI/ASTM D-178 specifications
- ASTM D-178 printed on underside of mat

Roll Sizes	2'x75', 3'x75', 4'x75'
Thickness	1/4"
Cut Lengths	2', 3', and 4' widths (up to 75' long)
Colors	 Black  Black/Yellow* <small>*only in 3' widths</small>

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

830 - Switchboard Matting - Vinyl 831 - Switchboard Matting - Diamond

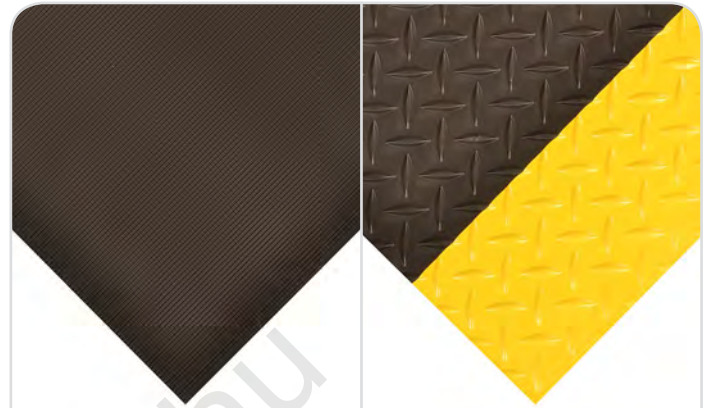

Applications:

Transformers, switchgear, distribution boards and generators.

Performance:

	Good	Better	Best	Superior
Wear Resistance			830, 831	
Anti-fatigue Performance				
Slip Resistance			830, 831	

835, 836 - MILITARY SWITCHBOARD MATS


- Each square foot of this matting is tested in conformance with MIL-DTL-15562G specifications:
 - Class 2 Di-electric Strength: 30,000 volts
 - Proof test of 20,000 volts
 - Recommended maximum use voltage: 3,000
- Roll Size = 3'x75'
- Custom sizes available in 3' width (up to 75')
- Fire retardant



Fire Retardant

Applications:

These mats are designed for use as flooring, or around electrical apparatus and circuits in the commercial marine industry as well as the military and avionics.

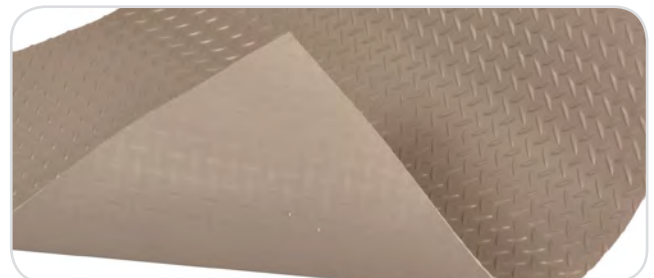

835 - TYPE 2


- Electrically Insulative Type 2 PVC compound
- Smooth surface - Easy to sweep or mop clean
- Thickness 1/8"

Colors  Black  Blue

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

836 - TYPE 3

- Electrically Insulative Type 3 PVC compound
- Diamond-plate surface - Added traction
- Thickness 3/16"
- Slip resistant

Colors  Grey



Anti-Slip

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78


INDUSTRIAL SPECIALTIES



INDUSTRIAL SPECIALTIES

040 - SLABMAT™

- Tough natural rubber compound
- Modular interlocking, designed for use with heavy industrial equipment
- Shock absorbing, impact protection
- Compression test at 20% up to 24,000 lb/sf

Stock Sizes	3'x3'
Thickness	1/2"
Colors	 Black



Applications: Areas where heavy industrial equipment is stored. It is also suitable for gyms, weight rooms, skating rinks, golf courses, trailers and stables.

Performance:




Slabmat™ Safety Ramps



041 - SLABMAT™ SAFETY RAMPS 2" wide and 36" length


045 - WEIGHT ROOM MAT

- Heavy-duty natural rubber mat designed to handle heavy equipment
- Designed to take impact of free weights while protecting the floor
- Extra tough in order not to buckle or curl under the extreme weight
- Textured top surface provides traction

Stock Sizes	4'x6'
Thickness	1/2", 3/4"
Colors	 Black



Performance:

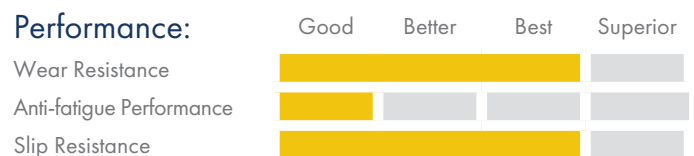

Applications: In areas where impact from heavy equipment often occurs and floor protection is needed.

INDUSTRIAL SPECIALTIES





Anti-Fatigue

INDUSTRIAL SPECIALTIES

950 - KNEE RX™ 951 - KNEE RX™ HD

- Designed for comfort and durability in extreme kneeling applications
- For use on gravel, asphalt, concrete, dirty/oily surfaces, tile & wood flooring, metal grating, grass
- Durable laminated heavy-duty rubber bottom surface for additional comfort and long-lasting wear in rough environments (951)
- Nitrile/PVC foam blend for the highest degree of resistance to oils and greases
- Self-extinguishing, non-conductive, silicone free material
- Built-in handle easy to carry or hang up



950
KNEE RX™

951
KNEE RX™ HD

Stock Sizes	12"x22", 12"x14" (950 only)
Thickness	1"
Colors	 Black

Applications: Tool carts, maintenance carts, individual workstations, landscaping, utilities, construction.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



Outdoor Use



Anti-Slip

680 - SAFETY TRAX®

- Slip resistant tape is affixed to surfaces to increase friction providing a safer pathway
- Top surface is embedded with silicon carbide particles
- Pressure adhesive backing allows for easy "peel and stick" installation

Roll Sizes	2"x60', 4"x60', 6"x60'
Colors	 Black

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

Applications: Inclines and ramped walkways.



ENTRANCE MATS






ENTRANCE MATS - Foyer

- 592** - MASTERFLEX™ DRAINAGE
- 593** - MASTERFLEX™ DRAINAGE w/CARPET
- 692** - MASTERFLEX™ HEEL-PROOF
- 693** - MASTERFLEX™ HEEL-PROOF w/CARPET

- Natural rubber compound
- Octagonal ring design with open construction
- Suitable for use in extreme weather

Stock Sizes	20"x20"
Thickness	1/2"
Colors	 Black



Performance:


	Good	Better	Best	Superior
Water Retention				593,693
Crush Resistance			592,593,692,693	
Soil Resistance		592,593,692,693		

Applications: Outdoor/indoor high traffic areas.

597 - MASTERFLEX™ SAFETY RAMPS

- 100% nitrile rubber
- Beveled edges prevent tripping
- Allows for inside and outside corners

Colors	 Black
--------	--

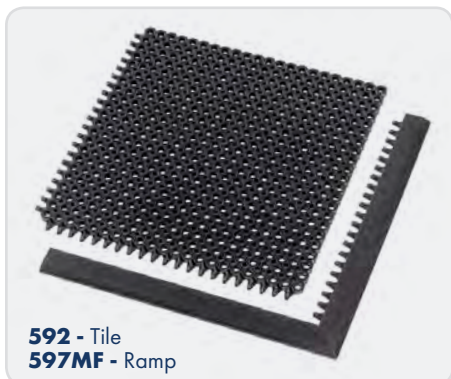

ENTRANCE MATS - Foyer




370 - MASTER TRAX[®] 371 - MASTER TRAX[®] LITE

- Crafted specifically for oversized entrances & foyers where one piece of matting is required versus multiple individual mats
- 54 ounces (370) and 37 ounces (371) per square yard of berber needle punch
- Heat-sealed edges, vinyl borders, and squared edges available
- Rubber backing is textured to help minimize mat movement
- UV stable, stain resistant, durable and highly resilient, tightly woven carpet

Custom Sizes	Available up to 13' wide and 75' long.			
Thickness	7/16" (370), 3/8" (371)			
Colors				
	Charcoal	Sterling	Coir	Zinc
				
	Steel Blue	Walnut		
	*370 Master Trax [®] additional colors available; see page 66 for full color selection.			

Applications: Heavy traffic entrances: Retail, shopping malls, schools, hospitals, airports, office buildings, floor applications and recessed trays.

Performance:	Good	Better	Best	Superior
Water Retention			371	370
Crush Resistance			371	370
Soil Resistance			371	370

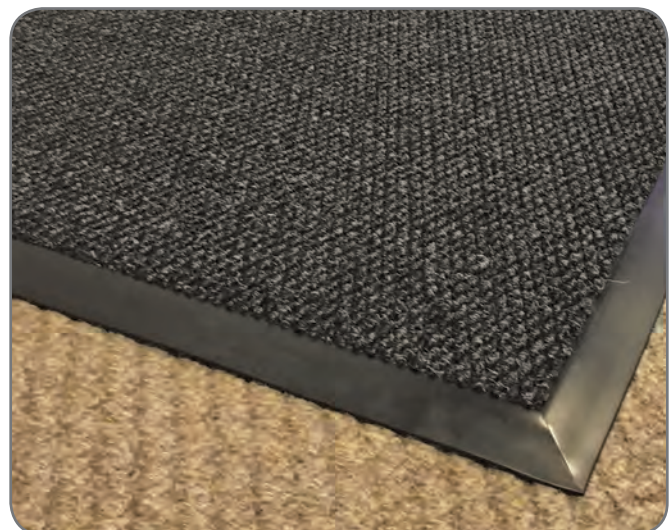



Cleaning



Cold Resistant



Outdoor Use

ENTRANCE MATS - Outdoor

340 - SOIL GUARD™

350 - SLIP GUARD™ w/GRIT-STEP™

- Heavy-duty, durable rubber compound
- Low profile for door clearance/cart traffic
- High-low design scrapes debris from shoe traffic
- 350 has grit surface for added traction
- Easy to clean – simply hose off



Stock Sizes	3'x5' (340 & 350) 4'x6' (340 w/Parquet pattern)
Thickness	1/4"
Colors	 Black

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78
Applies to 350 - Slip GUARD™ w/GRIT-STEP™

Applications: Outdoor high traffic areas.

Performance:



Cleaning




Cold Resistant




Outdoor Use

345 - RUBBER BRUSH™

- Tough natural rubber remains flexible while withstanding extreme cold
- Thousands of flexible rubber fingers sweep shoes clean
- Suction cups on underside help to minimize mat movement
- Molded beveled edging on all 4 sides creates a retention dam to trap moisture and hides debris
- Heavier duty/better than competition

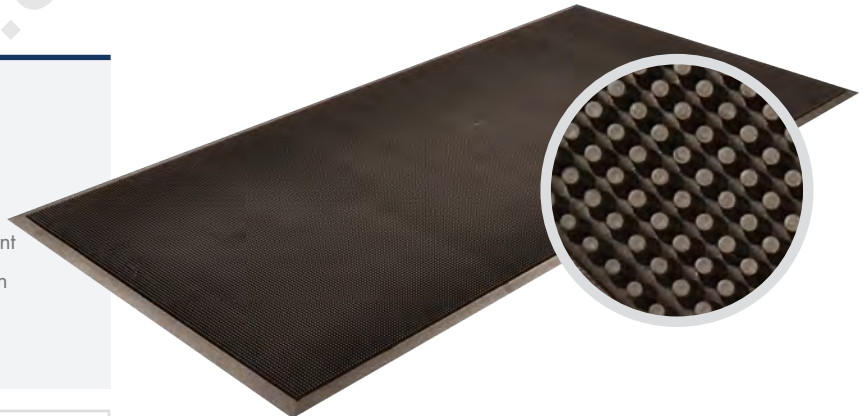


Stock Sizes	16"x24", 24"x32", 28"x46", 32"x39", 36"x60", 36"x 72"
Thickness	5/8"
Colors	 Black

Applications:

Outdoor high traffic areas: Schools, municipal buildings, plant entrances, and office buildings.

Performance:

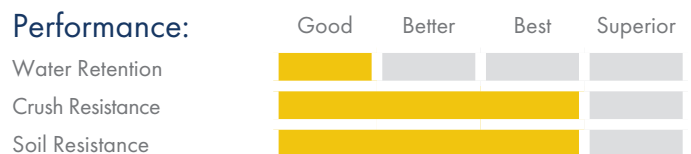



Outdoor Use



Medium Traffic



Heavy Traffic

ENTRANCE MATS - Outdoor

265 - WAYFARER®

266 - WAYFARER® CUSTOM HD UNBACKED

267 - WAYFARER® CUSTOM HD

- A vinyl-looped construction traps dirt and moisture while scraping debris
- Color-coordinated thin vinyl backing resists mat movement (265)
- Open unbacked design allows moisture and dirt to pass through the mat (266)
- Thick vinyl backing to resist mat movement (267)
- Factory compressed border on stock sizes (265, 266)



Stock Sizes	3'x5', 4'x6'
Roll Sizes	3'x60', 4'x60'
Thickness	3/8"(265), 1/2"(266), 5/8"(267)
Cut Lengths	3' and 4' widths (up to 60' long)
Colors	 Leaf Green  Brown  Grey  Black  Navy

* 267 only available in black.

Applications:

- (265) Outdoor entrances, plant doorways, water fountain areas.
- (266) Outdoor entrances, pool areas, recessed wells in foyers.
- (267) Outdoor entrances, plant doorways, drinking fountains, and pool areas.

Performance:

	Good	Better	Best	Superior
Water Retention	[Progress bar: 1/4 filled]			
Crush Resistance	[Progress bar: 3/4 filled]			
Scraping Performance	[Progress bar: 3/4 filled]			



265 - WAYFARER®



266 - WAYFARER® CUSTOM HD UNBACKED



ENTRANCE MATS - Outdoor

599 - OCT-O-FLEX™

- Resilient natural rubber compound
- A smooth top surface, heavyweight construction
- Molded beveled edging on all 4 sides
- Raised knob underside provides aeration, reduces mat movement
- For custom options see product 592 on page 56



Stock Sizes	2'x3', 3'x5', 4'x6'
Thickness	1/2"
Colors	 Black

Applications:

Outside high traffic areas; schools, retail stores, hospitals, nursing homes, areas with carts and/or wheelchair traffic.

Performance:

	Good	Better	Best	Superior
Wear Resistance				
Crush Resistance				
Scraping Performance				



352 - BOOT SCRAPER™

- Resilient natural rubber compound
- Removes dirt and muck from the bottom and sides of your shoes and boots
- Flexible rubber fingertips on the sidewalls help to quickly remove dirt and debris before it can be tracked inside your facility
- Designed to be bolted down in a permanent position
- Easy to clean and maintain
- Stop dirt, sand, grass, snow, salt and mud at the door

NEW!



Applications:

Outdoor entrances, wet or dry areas, portable or can be bolted down.

Performance:

	Good	Better	Best	Superior
Water Retention				
Crush Resistance				
Scraping Performance				

Stock Sizes	12"x15"
Thickness	2"
Colors	 Black



Cut Lengths



Outdoor Use



Medium Traffic



Heavy Traffic

ENTRANCE MATS - Vinyl-Backed

231 - PRELUDE™

- A coarse loop-twisted non-absorbent ribbon fiber to scrape heavy debris from foot traffic
- Vinyl backing ensures minimal buckling and mat movement
- Can be used as a stand-alone mat, or as the first section (Scraping) of the "Stages" entrance matting system

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	   Black Brown Grey



Applications: Outdoor - Main entranceways, all heavy traffic areas.

Performance:	Good	Better	Best	Superior
Crush Resistance	██████████			██████████
Soil Resistance	██████████			██████████
Function & Appearance	██████████			

146 - ENCORE™

- A combination of Prelude™ scraping and looped pile Decalon®
- Vinyl backing ensures minimal buckling and mat movement
- Can be used as a stand-alone mat, or as the second section (Scraping & Drying) of the "Stages" entrance matting system

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	   Black Brown Grey




Applications: Inside foyer area - Main entranceways, all heavy traffic areas.

Performance:	Good	Better	Best	Superior
Crush Resistance	██████████			██████████
Soil Resistance	██████████			██████████
Function & Appearance	██████████			

141 - OVATION™

- Tufted Decalon® looped pile construction for drying and cleaning
- Vinyl backing ensures minimal buckling and mat movement
- Can be used as a stand-alone mat, or as the third section (Drying) of the "Stages" entrance matting system

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	     Burgundy Brown Grey Black Blue

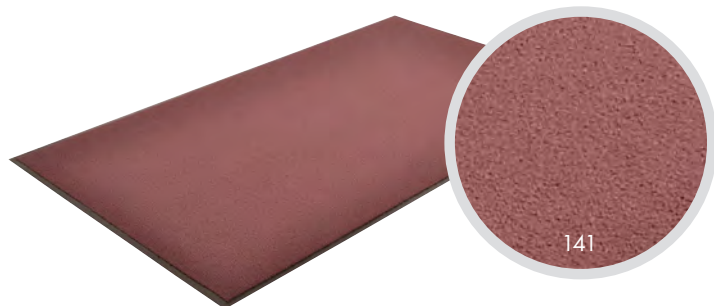

Applications: Main entranceways, all heavy traffic areas.


Performance:	Good	Better	Best	Superior
Water Retention	██████████			██████████
Crush Resistance	██████████			██████████
Soil Resistance	██████████			██████████
Function & Appearance	██████████			

ENTRANCE MATS - Vinyl-Backed

117 - HERITAGE RIB™

- A heavier-weight double rib high / low design that performs the scraping function of the mat
- 24 ounces of needle-punched yarn per square yard
- Vinyl backing ensures minimal buckling and mat movement

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	     Red/Black Charcoal Brown Grey Green

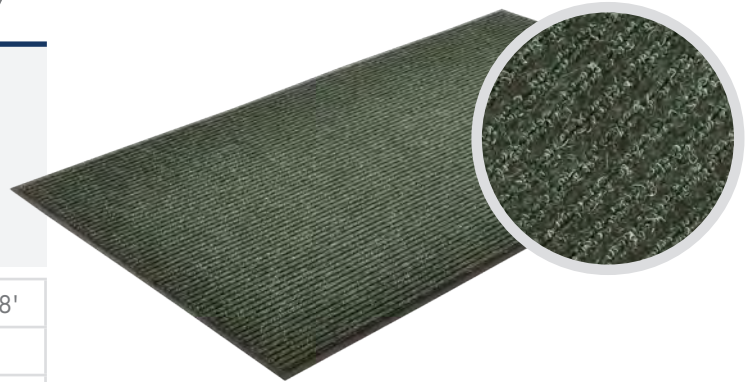

Applications: Entranceways; Lobbies; heavy traffic areas.

Performance:

	Good	Better	Best	Superior
Water Retention	██████████		██████████	██████████
Crush Resistance	██████████		██████████	██████████
Soil Resistance	██████████		██████████	██████████
Function & Appearance	██████████		██████████	██████████

118 - ARROW TRAX®

- High/low herringbone carpet scrapes and channels moisture and debris away from shoes
- A full 40 ounces of needle-punched yarn per square yard provides the highest degree of crush resistance and absorption
- Vinyl backing ensures minimal buckling and mat movement

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	   Charcoal Brown Grey





Applications: Indoor - Main entranceways; heavy traffic areas.

Performance:

	Good	Better	Best	Superior
Water Retention	██████████		██████████	██████████
Crush Resistance	██████████		██████████	██████████
Soil Resistance	██████████		██████████	██████████
Function & Appearance	██████████		██████████	██████████

131 - DANTE™

- Densely tufted cut-pile Decalon® construction
- Vinyl backing ensures minimal buckling and mat movement

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	  Charcoal Brown



ENTRANCE MATS - Vinyl-Backed

136 - POLYNIB™


- Tightly nibbed loop that entraps debris and hides it for an always elegant appearance
- 24 ounces of needle-punched yarn per square yard
- Low profile performs in narrow clearance doorways
- Vinyl backing ensures minimal buckling and mat movement



Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	1/4"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	   Brown Grey Charcoal

Applications: Indoor – Entranceways, lobbies, all medium traffic areas.

Performance:

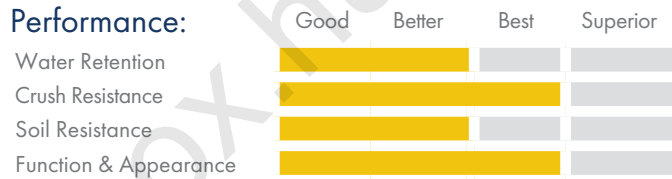

145 - PREFERENCE™

- A combination of Prelude™ scraping and looped pile Decalon® drying yarns in a mini-checked pattern
- 26 ounces of needle-punched yarn per square yard
- Vinyl backing ensures minimal buckling and mat movement
- Dual-fiber, mini-checked pattern effectively traps debris and moisture while retaining its contemporary appearance



Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	   Hunter Green Brown Charcoal

Applications: Inside foyer area - Main entranceways, all heavy traffic areas.

Performance:





ENTRANCE MATS - Vinyl-Backed

138 - UPTOWN™

- The high-low looped pile design for drying and retaining moisture and debris, while offering an upscale, elegant look
- A dense 36 ounces of tufted Decalon® yarn per square yard for the ultimate in moisture absorption and crush resistance
- Vinyl backing ensures minimal buckling and mat movement

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	   Brown Navy Charcoal



Applications: All large, upscale entrances: offices, hotels, professional buildings.

Performance:	Good	Better	Best	Superior
Water Retention	[Yellow bar]			
Crush Resistance	[Yellow bar]			[Grey bar]
Soil Resistance	[Yellow bar]			[Grey bar]
Function & Appearance	[Yellow bar]			

132 - ESTES®

- Fashionable high-low looped pile Decalon® captures debris and dries foot traffic while maintaining its attractive appearance
- 25 ounces of tufted yarn per square yard
- Vinyl backing ensures minimal buckling and mat movement

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	      Burgundy Brown Navy Charcoal Red/Black Hunter Green





Applications: Indoor - Main entranceways; any and all heavy traffic areas.

Performance:	Good	Better	Best	Superior
Water Retention	[Yellow bar]			[Grey bar]
Crush Resistance	[Yellow bar]			[Grey bar]
Soil Resistance	[Yellow bar]			[Grey bar]
Function & Appearance	[Yellow bar]			

137 - OPERA™

- Dense combination of scraping and absorbent yarns ensure maximum performance
- Vinyl backing ensures minimal buckling and mat movement
- Low profile for use in narrow clearance doorways

Stock Sizes	3'x10', 3'x12', 4'x10', 4'x12', 6'x10', 6'x12'
Thickness	3/8"
Colors	  Black Grey



Applications: All large, upscale entrances: offices, hotels, professional buildings.

Performance:	Good	Better	Best	Superior
Water Retention	[Yellow bar]			[Grey bar]
Crush Resistance	[Yellow bar]			[Grey bar]
Soil Resistance	[Yellow bar]			
Function & Appearance	[Yellow bar]			

ENTRANCE MATS - Logo Mats




193 - SUPERIOR IMPACT™ LOGO MAT

- Dye-injection process for long lasting, vibrant color
- Color palette of 22 base colors
- Vinyl backing ensure minimal buckling and mat movement
- 24 ounces of cut-pile nylon yarn per square yard provides increased moisture retention

Stock Sizes	2'x3', 3'x4', 3'x5', 4'x6', 4'x8', 5'x8', 3'x10', 4'x10', 4'x12'		
Thickness	3/8"		
Colors			

Applications: Prominent entrances of light to heavy traffic where a long-lasting image is critical: Retail, restaurants, hotels, corporate offices, schools.

Performance:	Good	Better	Best	Superior
Water Retention	████████	██████	████	██
Crush Resistance	████████	██████	████	██
Soil Resistance	████████	██████	████	██
Function & Appearance	████████	██████	████	██

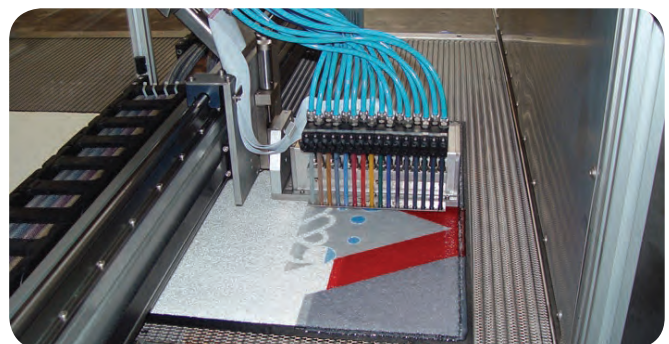



Custom



Heavy Traffic

ENTRANCE MATS - Logo Mats

373 - MASTER GUARD™ LOGO MAT

- Designed for use in large format/high traffic entrances
- 54 ounces of needle punch yarn per square yard
- Water jet cut textile logo inlay
- 100% solution dyed UV stabilized polypropylene fibers
- Berber design carpet surface
- Heavy-duty vinyl edging reduces trip hazards and keeps mat flat and in position

Cut Sizes Available up to 13' wide and 75' long.

Thickness 1/2"

Colors



Applications: Heavy traffic entrances: Retail, restaurants, hotels, corporate offices, schools, and outdoor with no direct exposure to elements.

Performance:

	Good	Better	Best	Superior
Water Retention	██████████	██████████	██████████	██████████
Crush Resistance	██████████	██████████	██████████	██████████
Soil Resistance	██████████	██████████	██████████	██████████
Function & Appearance	██████████	██████████	██████████	██████████

ENTRANCE MATS - Rubber-Backed



ENTRANCE MATS - Rubber-Backed




150 - AQUA-TRAP®

161 - BARRIER RIB™

- Molded pattern facilitates scraping and drying
- Raised rubber border retains moisture and debris
- Carpet-to-edge (CTE) construction to blend with its surroundings
- Anti-Microbial carpet treatment stops bacteria and germs
- 20 ounces of tufted yarn per square yard
- Rubber underside cleat design resists mat slippage





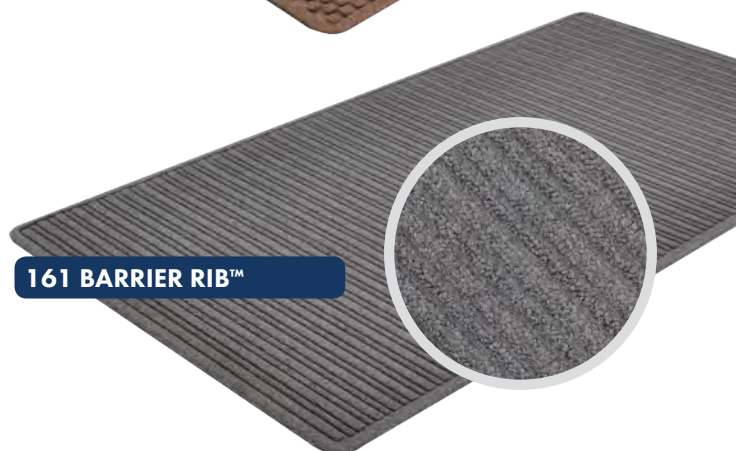




150 AQUA-TRAP®



161 BARRIER RIB™

Applications: Indoor - Main entranceways; any and all heavy traffic areas where sensitive health issues may be a concern such as; hospitals, health care facilities, schools, and daycare.

Performance	Good	Better	Best	Superior
Water Retention	██████████			██████
Crush Resistance	██████████			██████
Soil Resistance	██████████			
Function & Appearance	██████████			

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x10', 4'x6', 4'x10'						
Thickness	3/8"						
Cut Lengths	3' and 4' widths (5'3" up to 60' long)						
Colors	 Charcoal	 Brown	 Grey	 Burgundy	 Red/Black	 Hunter Green	 Slate Blue

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

ENTRANCE MATS - Rubber-Backed

165 - GUZZLER™ CTE™

NEW!

- High/low waffle pattern facilitates scraping and keeps moisture and debris away from foot traffic
- Raised rubber carpet-to-edge (CTE) border on all 4 sides traps moisture and debris for easy removal
- Molded rubber cleats on the bottom of the mat grip underlying surfaces and minimize mat movement
- 26 ounces of tufted yarn per square yard
- Low profile for use in narrow clearance doorways



Stock Sizes	2'x3', 3'x5', 3'x10', 4'x6', 4'x10'
Thickness	3/8"
Colors	 Charcoal

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

Applications:

Office buildings, healthcare facilities, commercial buildings, restaurants, and hotels.

Performance:

	Good	Better	Best	Superior
Water Retention	██████████			██████████
Crush Resistance	██████████	██████████	██████████	██████████
Soil Resistance	██████████	██████████	██████████	██████████
Function & Appearance	██████████	██████████	██████████	██████████

169 - OPUS™ CTE™

NEW!

- High/low diamond pattern facilitates scraping and keeps moisture and debris away from foot traffic
- Raised rubber carpet-to-edge (CTE) border on all 4 sides traps moisture and debris for easy removal
- Molded rubber cleats on the bottom of the mat grip underlying surfaces and minimize mat movement
- 26 ounces of tufted yarn per square yard
- Low profile for use in narrow clearance doorways



Stock Sizes	2'x3', 3'x4', 3'x5', 3'x10', 4'x6', 4'x10'
Thickness	3/8"
Colors	 Charcoal

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

Applications:

Office buildings, healthcare facilities, commercial buildings, restaurants, and hotels.

Performance:

	Good	Better	Best	Superior
Water Retention	██████████			██████████
Crush Resistance	██████████	██████████	██████████	██████████
Soil Resistance	██████████	██████████	██████████	██████████
Function & Appearance	██████████	██████████	██████████	██████████



Medium Traffic



Heavy Traffic

ENTRANCE MATS - Rubber-Backed



166 - GUZZLER™
167 - PORTRAIT™
168 - OPUS™

- High/low pattern facilitates scraping and keeps moisture and debris away from foot traffic
- Raised rubber border on all 4 sides traps moisture and debris for easy removal
- Molded rubber cleats on the bottom of the mat grip underlying surfaces and minimize mat movement
- 26 ounces of tufted yarn per square yard
- Low profile for use in narrow clearance doorways

Applications: The non-directional pattern design is perfect for entranceways, lobbies, and other indoor medium to high traffic areas.

Performance:

	Good	Better	Best	Superior
Water Retention	[Yellow bar]			[Grey bar]
Crush Resistance	[Yellow bar]	[Grey bar]	[Grey bar]	[Grey bar]
Soil Resistance	[Yellow bar]	[Grey bar]	[Grey bar]	[Grey bar]
Function & Appearance	[Yellow bar]	[Grey bar]	[Grey bar]	[Grey bar]

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x10', 4'x6', 4'x10'					
Thickness	3/8"					
Colors (166)						
	Burgundy	Brown	Slate Blue	Hunter Green	Charcoal	Red/Black
Colors (167)						
	Burgundy	Brown	Slate Blue	Hunter Green	Charcoal	
Colors (168)						
	Burgundy	Brown	Slate Blue	Hunter Green	Charcoal	



166 GUZZLER™



167 PORTRAIT™




168 OPUS™

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

VALUE LINE - Carpet Mats


105, 109, 130 - INDOOR ENTRANCE MATS

- Vinyl backing ensures minimal buckling and mat movement
- Roll Sizes: 3'x60', 4'x60', 6'x60'
- Stock sizes: 2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4x8'
- Cut Lengths available in 3', 4', and 6' widths (up to 60' long)

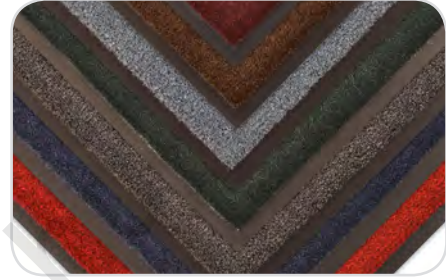

105 - CHEVRON

- Scrapes debris from shoes regardless of traffic flow
- Thickness 5/16"
- 24 oz. of needle-punched yarn per sq. yard




109 - BRUSH STEP®

- A lighter-weight double rib high/low design
- Thickness 3/8"
- 18 oz. of needle-punched yarn per sq. yard



130 - SABRE™

- Dries shoes and retains debris
- Thickness 5/16"
- 19 oz. of tufted cut-pile Decalon® per sq. yard



Applications:

Indoor – Entranceways, Lobbies, all light to medium traffic areas.

Performance:

	Good	Better	Best	Superior
Water Retention	■	■	■	■
Crush Resistance	■	■	■	■
Soil Resistance	■	■	■	■
Function & Appearance	■	■	■	■

151 - DIAMOND CTE™

152 - WAFFLE CTE™

- High/low pattern facilitates scraping and keeps moisture and debris away from foot traffic
- Raised rubber carpet-to-edge (CTE™), bordered on all 4 sides to trap moisture and debris
- Crumb rubber backing
- 26 ounces of tufted yarn per square yard

Stock Sizes	2'x3', 3'x5', 4'x6'
Thickness	3/8"
Colors	Brown Blue Charcoal

151 - DIAMOND CTE™



152 - WAFFLE CTE™





Applications:


Indoor – Entranceways, Lobbies, all light to medium traffic areas.

VALUE LINE - Sponge & Laminate Mats

- 408 - ACHILLES™**
- 409 - TEXTURED CUSHION SOF-TRED™**
- 508 - DIAMOND CUSHION™**

- Basic anti-fatigue protection provided
- PVC closed cell foam relieves leg and back discomfort; provides a barrier to cold floors
- All 4 sides are beveled to minimize trip hazards

Roll Sizes	(3/8" thick) 2'x60', 3'x60', 4'x60' (5/8" thick) 2'x30', 3'x30', 4'x30' (1/2" thick) 2'x60', 3'x60', 4'x60'
Thickness	3/8", 5/8" (408, 409), 1/2" (508)
Colors	 Black  Black/Yellow






Applications: Areas requiring basic fatigue relief.

Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

- 509 - DIAMOND-TUFF™**
- 510 - DIAMOND-TUFF™ MAX**

- Diamond pattern vinyl laminate top surface for added traction
- PVC closed cell foam relieves leg and back discomfort
- Beveled on all 4 sides

Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x75', 3'x75', 4'x75', 5'x75'
Thickness	9/16" (509), 1" (510)
Colors	 Black  Black/Yellow

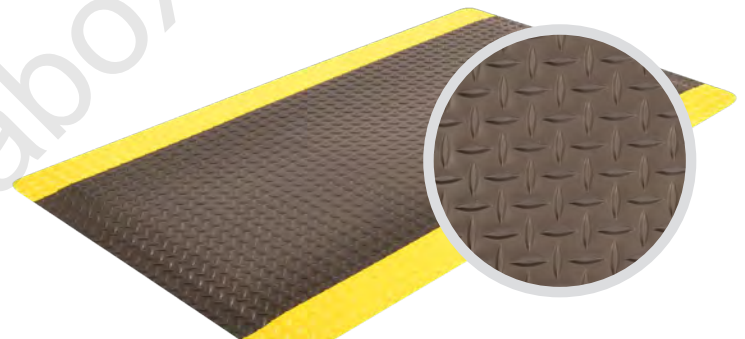




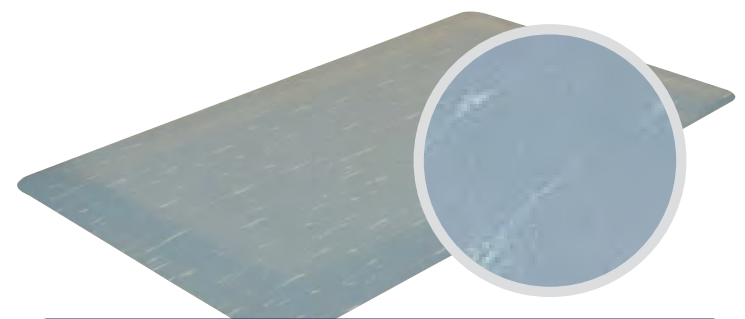
Applications: Areas that require added anti-fatigue relief, sure footing, and durability.

Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

- 511 - MARBLE-TUFF™**
- 512 - MARBLE-TUFF™ MAX**

- Durable smooth vinyl top surface easy to sweep or mop clean
- Dense closed cell foam base provides ergonomic support
- Beveled on all 4 sides

Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x75', 3'x75', 4'x75'
Thickness	1/2" (511), 1" (512)
Colors	 Black  Blue  Grey



Applications: Areas that require added anti-fatigue relief and durability in an attractive style.

Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



Anti-Fatigue



Anti-Slip



Cleaning



Drainage




Food Service



Modular

VALUE LINE - Rubber Mats

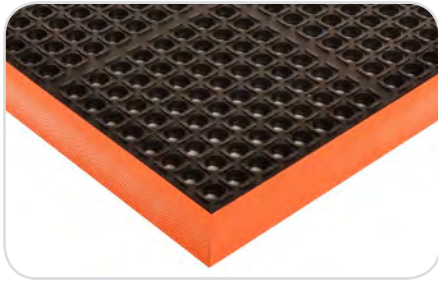

514 - SURE STEP

- General purpose drainage mat
- Edges are permanently attached
- Beveled edges

Colors Black/ Orange Black/Yellow

Stock Size	28"x40", 38"x64" (Bevel, 3 sides) 40"x52", 40"x64", 40"x124" (Bevel, 4 sides)
Thickness	3/4"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

619 - DRAIN LITE™

- General purpose drainage mat
- Beveled edge on all 4 sides

Colors Black



Stock Size	3'x5', 3'x10', 3'x15', 3'x20'
Thickness	1/2"

501 - CUSHION CONNECT™

- Large hole drainage design
- Modular design and configurations

Colors Black

Roll Size	3'x3'
Thickness	1/2"

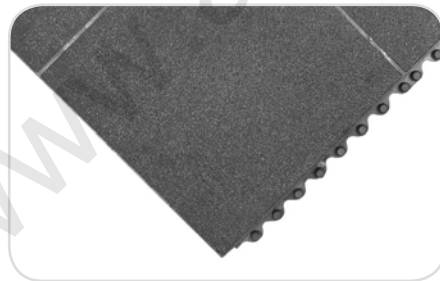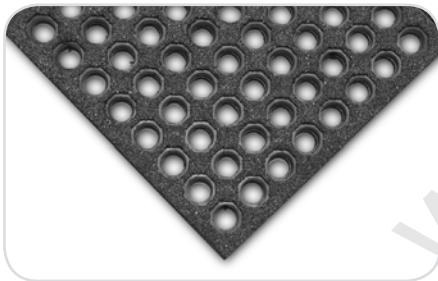

505 - GRIT-STEP™

- Large hole drainage design
- Silicon Carbide grit surface
- Modular design & customizable

Colors Black

Roll Size	3'x3'
Thickness	3/4"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

616 - CO-NEX™

- Solid pebbled top surface
- General purpose rubber compound
- Modular design and configurations

Colors Black

Roll Size	3'x3'
Thickness	1/2"

581 - CO-NEX™ RAMPS

- General purpose rubber compound
- Connects with the 616 CO-NEX
- Available in male and female
- Size: 2"x3'
- Thickness: 1/2"

Colors Yellow

ACCESSORIES



Applications:

For on-site cut carpet matting that requires a finished look and a beveled edge to reduce trip hazards.



Applications:

For on-site cut carpet matting that requires a finished look and a beveled edge to reduce trip hazards.



Applications:

To keep vinyl-backed floor mats from moving when placed on looped pile carpeting.

083 - STANDARD BEVELED NOSING

- Nosing lip is adhered underneath mat and produces the 1" "factory-look" beveled border
- #083K Nosing Kit – includes 25 feet of Nosing, 4 ounce can of adhesive and application roller

Colors



Black

Roll Size	1"x150'
Thickness	1/8"

084 - HEAVY DUTY BEVELED NOSING

- Nosing lip is adhered underneath mat and produces a 1 1/2" beveled border
- #039K Nosing Kit – includes 25 feet of Nosing, 4 ounce can of adhesive and application roller

Colors



Black

Roll Size	1 1/2"x100'
Thickness	1/4"

085 - VELCRO® CARPET ANCHOR

- Individual easy-peel self-adhesive strips of Velcro® adhere to vinyl backing of mat
- Anchors vinyl backed mats to looped pile carpet floors
- Most effective solution to anchor mats to carpet

Colors




Black

Roll Size	75'
Custom Size	Custom Lengths Available



Applications:

Wherever the splicing together of NoTrax® laminated floor mats is needed to create a larger work surface.

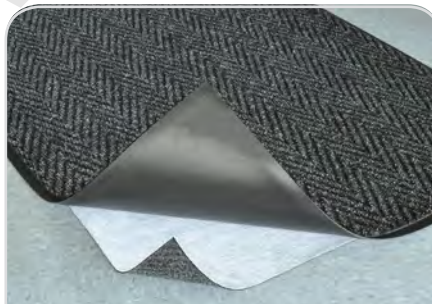

Applications:

To keep vinyl-backed floor mats from moving when placed on either smooth surface floors or carpeting.



086 -ADHESIVE

- Adhesive for NoTrax vinyl and rubber mats.
- Available in 4 oz can for vinyl and 8oz bottle for rubber

082 - SPLICING KIT

- For on-site splicing of blunt-cut laminate mats
- Contents: 5"x15' roll of vinyl patch material, small bottle of adhesive
- Tacks matting together quickly and easily on site

090 - MAT HOLD

- Rubberized mesh pad gently adheres to floor and underside of vinyl backed carpet mat
- Does not leave behind any residue and will not stain carpeting or floors
- Cut lengths: 2' and 3' wide (up to 100' long)

PROPOSITION 65:

Proposition 65 requires the State of California to maintain and update a list of chemicals that can cause cancer, birth defects or other reproductive harm. Businesses with 10 or more employees that expose individuals to listed chemicals through their products or operations must provide these warnings. Below is a list of part number, names, page number the product appears on within this catalog, and full form warnings for products NoTrax® sells that contain chemicals listed within Prop 65. On the corresponding page there is the short form warning with reference back to this page for the full warning and more information. Please read this carefully. For more information visit www.P65Warnings.ca.gov.

485/985 ERGO TRAX® (page 6)	⚠️ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
479/975 CUSHION TRAX® (page 8)	⚠️ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
979 SADDLE TRAX® (page 8)	⚠️ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
490/976/990 DURA TRAX® (page 10)	⚠️ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
474/974 ERGO MAT™ (page 12)	⚠️ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
482/782/982 BUBBLE TRAX® (page 12)	⚠️ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
474/974 ERGO MAT™ (page 12)	⚠️ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
482/782/982 BUBBLE TRAX® (page 12)	⚠️ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
T17/T17P SUPERFOAM™ (page 16)	⚠️ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
556/558/656/656FR CUSHION-EASE® (page 26)	⚠️ WARNING: This product can expose you to chemicals including diisodecyl phthalate which is known to the State of California to cause birth defects or reproductive harm, and 2-mercaptobenzothiazole which is known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov .
856/856FR CUSHION-EASE® (page 26)	⚠️ WARNING: This product can expose you to chemicals including diisodecyl phthalate which is known to the State of California to cause birth defects or reproductive harm, and 2-mercaptobenzothiazole and beryllium which are known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov .
550 CUSHION-EASE® (page 28)	⚠️ WARNING: This product can expose you to chemicals including diisodecyl phthalate which is known to the State of California to cause birth defects or reproductive harm, and 2-mercaptobenzothiazole which is known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov .
650/650FR CUSHION-EASE® (page 28)	⚠️ WARNING: This product can expose you to chemicals including diisodecyl phthalate which is known to the State of California to cause birth defects or reproductive harm, and 2-mercaptobenzothiazole which is known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov .
850/850FR CUSHION-EASE® (page 28)	⚠️ WARNING: This product can expose you to chemicals including diisodecyl phthalate which is known to the State of California to cause birth defects or reproductive harm, and 2-mercaptobenzothiazole and beryllium which are known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov .
543 CUSHION-TRED™ (page 35)	⚠️ WARNING: This product can expose you to chemicals including diisodecyl phthalate which is known to the State of California to cause birth defects or reproductive harm, and 2-mercaptobenzothiazole which is known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov .
520 CUSHION-LOK™ (page 37)	⚠️ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
522 CUSHION-LOK™ W/GRIP-STEP® (page 37)	⚠️ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm, and beryllium which is known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov .
523 MODULAR LOK-TYLE™ (page 37)	⚠️ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
620/621 DIAMOND FLEX-LOK™ (page 37)	⚠️ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
420 CUSHION-DEK™ (page 40)	⚠️ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
531 SAFETY GRID™ (page 40)	⚠️ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
755 NIRU® VERSA RUNNER™ (page 40)	⚠️ WARNING: This product can expose you to chemicals including diisodecyl phthalate which is known to the State of California to cause birth defects or reproductive harm, and 2-mercaptobenzothiazole which is known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov .
758 NIRU® KNOB-TOP RUNNER™ (page 41)	⚠️ WARNING: This product can expose you to chemicals including diisodecyl phthalate which is known to the State of California to cause birth defects or reproductive harm, and 2-mercaptobenzothiazole which is known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov .

PROPOSITION 65

765 DEEP FREEZE MAT™ (page 41)	⚠ WARNING: This product can expose you to chemicals including diisodecyl phthalate which is known to the State of California to cause birth defects or reproductive harm, and 2-mercaptobenzothiazole which is known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov .
730 V-GROOVE CORR. RUNNER™ VINYL (page 42)	⚠ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
735 ROUND RIB RUNNER (page 42)	⚠ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
737 DIAMOND PLATE RUNNER (page 42)	⚠ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
750 V-GROOVE CORR. RUNNER™ RUBBER (page 42)	⚠ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
826/927 DIAMOND STAT™ (page 46)	⚠ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
926 SMOOTH STAT™ (page 46)	⚠ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
448 AUTOCLAVEABLE BUBBLE MAT (page 47)	⚠ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
830/831 SWITCHBOARD MATTING (page 50)	⚠ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
835/836 MILITARY SWITCHBOARD MATS (page 50)	⚠ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
680 SAFETY TRAX® (page 54)	⚠ WARNING: This product can expose you to beryllium which is known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov .
950/951 KNEE RX™ (page 54)	⚠ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
350 SLIP GUARD™ w/GRIT-STEP™ (page 58)	⚠ WARNING: This product can expose you to beryllium which is known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov .
150 AQUA-TRAP® (page 68)	⚠ WARNING: This product can expose you to 2-mercaptobenzothiazole which is known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov .
161 BARRIER RIB™ (page 68)	⚠ WARNING: This product can expose you to 2-mercaptobenzothiazole which is known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov .
165 GUZZLER™ CTE™ (page 69)	⚠ WARNING: This product can expose you to di-2-ethylhexyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
169 OPUS™ CTE™ (page 69)	⚠ WARNING: This product can expose you to di-2-ethylhexyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
166 GUZZLER™ (page 70)	⚠ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm, and 2-mercaptobenzothiazole which is known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov .
167 PORTRAIT™ (page 70)	⚠ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm, and 2-mercaptobenzothiazole which is known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov .
168 OPUS™ (page 70)	⚠ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm, and 2-mercaptobenzothiazole which is known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov .
151 DIAMOND CTE™ (page 71)	⚠ WARNING: This product can expose you to di-2-ethylhexyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
152 WAFFLE CTE™ (page 71)	⚠ WARNING: This product can expose you to di-2-ethylhexyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
509/510 DIAMOND-TUFF™ (page 72)	⚠ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
511/512 MARBLE-TUFF™ (page 72)	⚠ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .
505 GRIT-STEP™ (page 73)	⚠ WARNING: This product can expose you to beryllium which is known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov .
514 SURE STEP (page 73)	⚠ WARNING: This product can expose you to di-2-ethylhexyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov .



NoTrax®

5655 West 73rd St.
Bedford Park, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: customerservice@notrax.com

www.notrax.com

Ver: 6/22
Code: NT216r1
© Justrite Safety Group. All rights reserved.

A product of:



Forgalmazó: Atamax Trade Kft.

Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and NoTrax.com.

Ajánlatkérés: atamax@atamax.hu