

# ONE BASE - MANY FACILITIES 7



RAL 5010 RAL 7016

## CONSTRUCTION

- Modular system
- Base structure with innovative frame section

## FEATURES

- Load surface of wood-based board, surface finish beech or coated dark grey

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Our modular system  
Available in two colours



## The base

- Four basic platforms of different sizes form the basis for almost all types of bodies that are mounted using a sturdy screwed connection.
- So it's also easy to adapt these products to different requirements.
- In this way **VARIOfit**® remains affordable and retains its intrinsic value for the customer.



## Platform trolley

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.000 / AG	910 x 500 x 255	20.5	910 x 500	400	160 x 40
sw-600.000 / AG	1060 x 600 x 295	25.0	1060 x 600	500	200 x 40
sw-700.000 / AG	1060 x 700 x 295	26.0	1060 x 700	500	200 x 40
sw-800.000 / AG	1260 x 800 x 295	32.0	1260 x 800	500	200 x 40



## INDIVIDUALLY

- Opportunities for modification in line with customers' individual wishes

## UNIQUE PIECE

- Deliveries of small series from one piece upwards
- Product approval drawings
- Fair prices even for small quantities

## CUSTOMER FOCUSED

- Analysing parameters such as uses, handling, workflows and much more in close cooperation with the customer

## TAILORED

- Products in special sizes, special colours and complete new designs

Our custom-made products in comparison



**VARIOfit**<sup>®</sup>



Customizing

# 8 PUSH BAR TROLLEYS



RAL 5010

RAL 7016

Available in 2 colours

EasySTOP

System trolleys



Wheels also available in grey

## CONSTRUCTION

- Modular system
- Base structure with innovative frame section, or of round pipe

## FEATURES

- Load surface of wood-based board, surface finish beech or coated dark grey or of waterproof bonded plywood, surface finish screen printed, anti-slip

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with food guard, or elastic solid-rubber tyres on cast aluminium wheel rim with precision deepgroove ball bearings, black, with foot guard, wheels also available in grey
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

BEST SELLER

## Push bar trolley

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-500.100 / AG	975 x 500 x 975	25.0	880 x 500	400	160 x 40
sw-600.100 / AG	1125 x 600 x 1015	29.5	1030 x 600	500	200 x 40
sw-700.100 / AG	1125 x 700 x 1015	33.5	1030 x 700	500	200 x 40
sw-800.100 / AG	1325 x 800 x 1015	37.0	1230 x 800	500	200 x 40

Also available in ESD design on page 72

## Push bar trolley

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-500.103 / AG	950 x 500 x 990	23.5	850 x 500	400	160 x 40
sw-700.103 / AG	1100 x 700 x 1030	28.0	1000 x 700	400	200 x 40
sw-700.104 / AG	1300 x 700 x 1030	32.5	1200 x 700	400	200 x 40

## Light version | tubular steel push bar trolley

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-450.103 / AG	950 x 450 x 945	17.0	850 x 450	200	125 x 30
sw-600.109 / AG	1100 x 600 x 945	22.5	1000 x 600	200	125 x 30

## Push bar trolley | with screen printing plate

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-700.180 / AG	1130 x 700 x 1015	36.0	1025 x 700	1000	200 x 50
sw-800.180 / AG	1330 x 800 x 1015	44.0	1225 x 800	1000	200 x 50
sw-800.181 / AG	1730 x 800 x 1015	51.0	1625 x 800	1000	200 x 50
sw-800.184 / AG	2130 x 800 x 1015	58.0	2025 x 800	1000	200 x 50

Elastic solid-rubber tyres



RAL 5010 RAL 7016

## CONSTRUCTION

- Modular system
- Base structure with innovative frame section, or of round pipe


## FEATURES

- Load surface of wood-based board, surface finish beech or coated dark grey

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with food guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Available in 2 colours  
Variations of push bars  
**EasySTOP**



System trolleys

### Push bar trolley | with bended tubes



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.119 / AG	975 x 500 x 935	21.5	880 x 500	250	125 x 30
sw-600.119 / AG	1125 x 600 x 935	25.0	1030 x 600	250	125 x 30



### Double-end push bar trolley | with bended tubes



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.219 / AG	1040 x 500 x 935	26.0	850 x 500	250	125 x 30
sw-600.219 / AG	1190 x 600 x 935	30.0	1000 x 600	250	125 x 30



### Push bar trolley | with vertical tubes



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.105 / AG	950 x 500 x 990	25.5	850 x 500	400	160 x 40
sw-700.105 / AG	1100 x 700 x 1030	31.0	1000 x 700	400	200 x 40
sw-700.106 / AG	1300 x 700 x 1030	33.5	1200 x 700	400	200 x 40



### Table trolley | with push bar



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.503 / AG	955 x 505 x 990	31.5	850 x 500	400	160 x 40
sw-700.503 / AG	1105 x 705 x 1030	40.0	1000 x 700	400	200 x 40
sw-700.504 / AG	1305 x 705 x 1030	47.5	1200 x 700	400	200 x 40



Load capacity shelf: 120 kg\*\*

\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: [atamax@atamax.hu](mailto:atamax@atamax.hu)

# 10 PUSH BAR TROLLEYS

RAL 5010 RAL 7016

Available in 2 colours  
Dead man's brake

System trolleys

Brake applied  
Brake released



AG



## CONSTRUCTION

- Base structure with innovative frame section
- Fixed welded tubular push bar with dead man's brake, additional handle beneath the push bar

## FEATURES

- Load surface of wood-based board, surface finish beech or coated dark grey

## FITTINGS

- 2 swivel castors with dead man's brake, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

### Push bar trolley with dead man's brake

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.125 / AG	945 x 600 x 1015	25.5	800 x 600	250	125 x 30

## STORE-ROOM TROLLEY

Available in 2 colours or aluminium

Fixed welded

**EasySTOP**



## CONSTRUCTION

- Robust welded steel or aluminium construction
- Transverse strut in push bar

## FEATURES

- Load surface of wood-based board, surface finish beech or coated dark grey or of waterproof bonded plywood, surface finish screen printed, anti-slip

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated or aluminium

BEST  
SELLER

### Store-room trolley

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-450.801 / AG	1115 x 450 x 970	16.0	890 x 450	200	125 x 30
sw-600.800 / AG	1265 x 600 x 970	22.0	1040 x 600	200	125 x 30

### Aluminium store-room trolley

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
ap-421.000	995 x 440 x 975	9.5	845 x 440	200	125 x 30



RAL 5010 RAL 7016

## CONSTRUCTION

- Modular system
- Base structure with innovative frame section


## FEATURES

- Load surface of wood-based board, surface finish beech or coated dark grey
- End and side walls of mesh with size 50 x 50 mm
- Side walls 515 mm high and removable

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Available in 2 colours  
End and side walls of mesh  
Side walls removable  
**EasySTOP**



System trolleys

### Single-end trolley | with mesh



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.101 / AG	975 x 500 x 975	25.0	880 x 500	400	160 x 40
sw-600.101 / AG	1125 x 600 x 1015	30.0	1030 x 600	500	200 x 40
sw-700.101 / AG	1125 x 700 x 1015	31.5	1030 x 700	500	200 x 40
sw-800.101 / AG	1325 x 800 x 1015	36.5	1230 x 800	500	200 x 40



### Double-end trolley | with mesh



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.201 / AG	1040 x 500 x 975	30.5	850 x 500	400	160 x 40
sw-600.201 / AG	1190 x 600 x 1015	36.0	1000 x 600	500	200 x 40
sw-700.201 / AG	1190 x 700 x 1015	38.5	1000 x 700	500	200 x 40
sw-800.201 / AG	1390 x 800 x 1015	45.0	1200 x 800	500	200 x 40



### Three-sided trolley | with mesh



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.301 / AG	1040 x 500 x 975	32.0	850 x 475	400	160 x 40
sw-600.301 / AG	1190 x 600 x 1015	38.0	1000 x 575	500	200 x 40
sw-700.301 / AG	1190 x 700 x 1015	41.5	1000 x 675	500	200 x 40
sw-800.301 / AG	1390 x 800 x 1015	47.5	1200 x 775	500	200 x 40



Side wall fixing

### Four-sided trolley | with mesh



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.401 / AG	1040 x 500 x 975	37.0	850 x 450	400	160 x 40
sw-600.401 / AG	1190 x 600 x 1015	42.5	1000 x 550	500	200 x 40
sw-700.401 / AG	1190 x 700 x 1015	45.0	1000 x 650	500	200 x 40
sw-800.401 / AG	1390 x 800 x 1015	53.0	1200 x 750	500	200 x 40



**BEST  
SELLER**

# 12 SYSTEM TROLLEYS



RAL 5010

RAL 7016

Available in 2 colours

End and side walls of wood-based board

Side walls removable

**EasySTOP**

System trolleys



## CONSTRUCTION

- Modular system
- Base structure with innovative frame section

## FEATURES

- Load surface, end and side walls of wood-based board, surface finish beech or coated dark grey
- Side walls 515 mm high and removable

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



### Single-end trolley | with board

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.102 / AG	975 x 500 x 975	26.0	880 x 500	400	160 x 40
sw-600.102 / AG	1125 x 600 x 1015	30.0	1030 x 600	500	200 x 40
sw-700.102 / AG	1125 x 700 x 1015	33.0	1030 x 700	500	200 x 40
sw-800.102 / AG	1325 x 800 x 1015	39.0	1230 x 800	500	200 x 40

### Double-end trolley | with board

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.202 / AG	1040 x 500 x 975	30.5	850 x 500	400	160 x 40
sw-600.222 / AG	1190 x 600 x 1015	34.5	1000 x 600	500	200 x 40
sw-700.202 / AG	1190 x 700 x 1015	40.0	1000 x 700	500	200 x 40
sw-800.202 / AG	1390 x 800 x 1015	45.5	1200 x 800	500	200 x 40

### Three-sided trolley | with board

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.302 / AG	1040 x 500 x 975	38.0	850 x 475	400	160 x 40
sw-600.302 / AG	1190 x 600 x 1015	45.0	1000 x 575	500	200 x 40
sw-700.302 / AG	1190 x 700 x 1015	48.5	1000 x 675	500	200 x 40
sw-800.302 / AG	1390 x 800 x 1015	56.0	1200 x 775	500	200 x 40



### Four-sided trolley | with board

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.400 / AG	1040 x 500 x 975	43.5	850 x 450	400	160 x 40
sw-600.400 / AG	1190 x 600 x 1015	51.0	1000 x 550	500	200 x 40
sw-700.400 / AG	1190 x 700 x 1015	54.0	1000 x 650	500	200 x 40
sw-800.400 / AG	1390 x 800 x 1015	61.0	1200 x 750	500	200 x 40



RAL 5010 RAL 7016

## CONSTRUCTION

- Modular system
- Base structure with innovative frame section

## FEATURES

- Load surface, end and side walls of waterproof bonded plywood, surface finish screen printed, anti-slip
- Side walls 515 mm high and removable

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Elastic solid-rubber tyres on cast aluminium wheel rim with precision deepgroove ball bearings, black, with foot guard, wheels also available in grey
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Available in 2 colours  
Load surface and walls screen printed  
Side walls removable  
**EasySTOP**



System trolleys

### Single-end trolley | with screen printing plate

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.182 / AG	1130 x 700 x 1015	38.5	1025 x 700	1000	200 x 50
sw-800.182 / AG	1330 x 800 x 1015	47.5	1225 x 800	1000	200 x 50
sw-800.183 / AG	1730 x 800 x 1015	54.5	1625 x 800	1000	200 x 50
sw-800.185 / AG	2130 x 800 x 1015	62.0	2025 x 800	1000	200 x 50

### Double-end trolley | with screen printing plate

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.212 / AG	1195 x 700 x 1015	45.5	995 x 700	1000	200 x 50
sw-800.212 / AG	1395 x 800 x 1015	54.5	1195 x 800	1000	200 x 50
sw-800.213 / AG	1795 x 800 x 1015	61.5	1595 x 800	1000	200 x 50
sw-800.226 / AG	2195 x 800 x 1015	69.5	1995 x 800	1000	200 x 50

### Three-sided trolley | with screen printing plate

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.322 / AG	1195 x 700 x 1015	54.5	995 x 665	1000	200 x 50
sw-800.322 / AG	1395 x 800 x 1015	66.5	1195 x 765	1000	200 x 50
sw-800.323 / AG	1795 x 800 x 1015	72.0	1595 x 765	1000	200 x 50
sw-800.324 / AG	2195 x 800 x 1015	80.5	1995 x 765	1000	200 x 50

### Four-sided trolley | with screen printing plate

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.465 / AG	1195 x 700 x 1015	58.5	995 x 650	1000	200 x 50
sw-800.465 / AG	1395 x 800 x 1015	71.5	1195 x 750	1000	200 x 50
sw-800.299 / AG	1795 x 800 x 1015	82.5	1595 x 750	1000	200 x 50
sw-800.466 / AG	2195 x 800 x 1015	94.5	1995 x 750	1000	200 x 50





# 14 FOLDING PUSH BAR TROLLEYS



RAL 5010

RAL 7016

Folding push bar

Loadable beyond the loading surface

**EasySTOP**

or dead man's brake

System trolleys



AG



## CONSTRUCTION

- Welded steel construction
- Folding push bar or tubular push bar with transverse strut and dead man's brake, additional handle beneath the push bar

## FEATURES

- Load surface of wood-based board, surface finish beech or coated dark grey


## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors or 2 swivel castors with dead man's brake, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

**BEST SELLER**

## Folding push bar trolley

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-450.802 / AG	815 x 450 x 940	15.0	720 x 450	150	125 x 30
sw-600.802 / AG	995 x 600 x 980	23.5	900 x 600	250	160 x 40

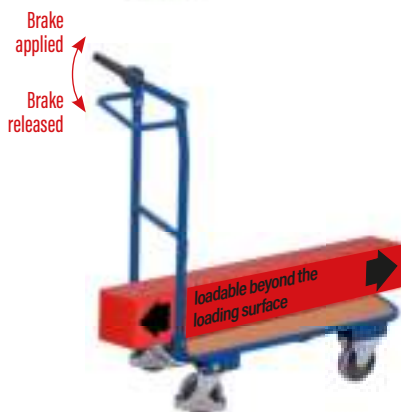

## Folding push bar trolley | with dead man's brake

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-450.831 / AG	865 x 450 x 1005	17.5	720 x 450	150	125 x 30



## Folding push bar trolley | with 2 push bars

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-450.803 / AG	850 x 450 x 940	18.5	720 x 450	150	125 x 30
sw-600.812 / AG	1030 x 600 x 980	27.0	900 x 600	250	160 x 40



Upper shelf lockable in folded state, lower load surface also usable with shelf folded

## Folding push bar trolley | with 2 shelves

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-450.836 / AG	890 x 450 x 970	28.0	720 x 450	150	125 x 30

Load capacity shelf: 70 kg\*\*



ALU  
minium

## CONSTRUCTION

- Welded aluminium construction
- Folding push bar with transverse strut

## FEATURES

- Load surface of diamond-tread plate or pasted with 3 mm grooved rubber mat, black

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard

Folding push bar  
Loadable beyond the loading surface  
**EasySTOP**

System trolleys

### Aluminium folding push bar trolley

**BEST  
SELLER**



Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
ap-450.803	815 x 450 x 950	10.0	720 x 450	150	125 x 30
ap-600.803	995 x 600 x 990	17.5	900 x 600	150	160 x 40



### Aluminium folding push bar trolley with grooved rubber mat



Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
ap-450.810	815 x 450 x 950	12.0	720 x 450	150	125 x 30
ap-600.812	995 x 600 x 990	19.5	900 x 600	150	160 x 40



Upper shelf lockable in folded state, lower load surface also usable with shelf folded

### Aluminium folding push bar trolley with 2 shelves

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
ap-450.813	890 x 450 x 970	18.0	720 x 450	150	125 x 30

Load capacity shelf: 70 kg\*\*



\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: [atamax@atamax.hu](mailto:atamax@atamax.hu)

Trolleys nestable  
Optionally with 2 load surfaces

System trolleys



## CONSTRUCTION

- Welded steel construction
- Push bar with vertical tubes or 4 side frames
- Trolleys nestable

## FEATURES

- Load surfaces of wood-based board, surface finish beech or coated dark grey or of waterproof bonded plywood, surface finish screen printed, anti-slip

## FITTINGS

- 2 swivel castors with brakes, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Hang-on wire basket on page 175

### C + C trolley

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.108 / AG	990 x 640 x 965	28.5	880 x 500	400	160 x 40
sw-700.108 / AG	1140 x 840 x 1005	35.5	1030 x 700	500	200 x 40

Hang-on wire basket on page 175

### C + C trolley | with load surface of screen printing plate

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.111 / AG	990 x 640 x 965	28.5	880 x 500	400	160 x 40
sw-600.111 / AG	1140 x 740 x 1005	33.0	1030 x 600	500	200 x 40
sw-700.111 / AG	1140 x 840 x 1005	38.5	1030 x 700	500	200 x 40

Hang-on wire basket on page 175

### C + C trolley | with 2 load surfaces of screen printing plate

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.112 / AG	990 x 640 x 965	36.5	880 x 500	400	160 x 40
sw-600.112 / AG	1140 x 740 x 1005	43.0	1030 x 600	500	200 x 40
sw-700.120 / AG	1140 x 840 x 1005	50.0	1030 x 700	500	200 x 40

Load capacity shelf: 80 kg\*\*

### C + C trolley | with 4 side frames

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.114 / AG	950 x 640 x 955	29.0	880 x 445	400	160 x 40
sw-600.114 / AG	1100 x 740 x 995	32.5	1030 x 545	500	200 x 40
sw-700.121 / AG	1100 x 840 x 995	34.0	1030 x 645	500	200 x 40

\*\*Static distributed load; Total load of the transport device must not be exceeded!

## INDIVIDUALLY

- Opportunities for modification in line with customers' individual wishes

## UNIQUE PIECE

- Deliveries of small series from one piece upwards
- Product approval drawings
- Fair prices even for small quantities

## CUSTOMER FOCUSED

- Analysing parameters such as uses, handling, workflows and much more in close cooperation with the customer

## TAILORED

- Products in special sizes, special colours and complete new designs

Our custom-made products in comparison



Your challenges inspire our innovative solutions



Customizing

# 18 SIDE-FRAME TROLLEYS



RAL 5010

RAL 7016

Side walls of wood or mesh, tubular walls or 4 brackets  
**EasySTOP** longitudinal for transporting long goods

System trolleys



## CONSTRUCTION

- Modular system
- Base structure with innovative frame section

## FEATURES

- Load surface and side walls of wood-based board, surface finish beech or coated dark grey, side walls alternatively of mesh with size 50 x 50 mm or with vertical tubular tubes or with 4 tubular side frames

## FITTINGS

- 2 swivel and 2 fixed castors, with **EasySTOP** (1 swivel and 1 fixed castor is braked on one longitudinal side)
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



### Side-frame trolley | with board sides

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-600.200 / AG	1060 x 600 x 1045	44.5	1060 x 540	500	200 x 40
sw-700.200 / AG	1060 x 700 x 1045	46.0	1060 x 640	500	200 x 40
sw-800.200 / AG	1260 x 800 x 1045	53.0	1260 x 740	500	200 x 40



NEW



### Side-frame trolley | with mesh sides

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-600.239 / AG	1060 x 600 x 1045	34.5	1060 x 540	500	200 x 40
sw-700.231 / AG	1060 x 700 x 1045	37.5	1060 x 640	500	200 x 40
sw-800.237 / AG	1260 x 800 x 1045	49.5	1260 x 740	500	200 x 40



### Side-frame trolley | with tubular side walls

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-600.203 / AG	1060 x 600 x 1045	30.5	1060 x 540	500	200 x 40
sw-700.203 / AG	1060 x 700 x 1045	33.5	1060 x 640	500	200 x 40
sw-800.203 / AG	1260 x 800 x 1045	44.5	1260 x 740	500	200 x 40



### Side-frame trolley | with 4 tubular side frames

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-500.204 / AG	910 x 500 x 990	30.0	910 x 440	400	160 x 40
sw-600.204 / AG	1060 x 600 x 1030	35.0	1060 x 540	500	200 x 40
sw-700.204 / AG	1060 x 700 x 1030	37.0	1060 x 640	500	200 x 40
sw-800.204 / AG	1260 x 800 x 1030	43.5	1260 x 740	500	200 x 40

# TUBULAR-SUPPORT TROLLEY 19



RAL 5010 RAL 7016

## CONSTRUCTION

- Modular system
- Base structure with innovative frame section

## FEATURES

- Load surface of wood-based board, surface finish beech or coated dark grey
- Use of up to 7 tubular supports possible

## FITTINGS

- 2 swivel and 2 fixed castors, with **EasySTOP** (1 swivel and 1 fixed castor is braked on one longitudinal side)
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Use of up to 7 tubular supports possible  
**EasySTOP** longitudinal for transporting long goods



### Tubular-support trolley | with 2 tubular supports



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.205 / AG	1070 x 700 x 1040	40.5	990 x 640	500	200 x 40
sw-800.205 / AG	1270 x 800 x 1040	47.0	1190 x 740	500	200 x 40

### ADDITIONAL ARTICLE Tubular supports

Article-no. + /Colour	For loading surface W x D (mm)	Weight kg
zsw-700.205 / AG	990 x 640	5.0
zsw-800.205 / AG	1190 x 740	5.0



System trolleys

RAL 5010 RAL 7016

## SHEET-MATERIAL TROLLEY / SHEET-MATERIAL STAND

## CONSTRUCTION

- Welded steel construction
- Without tubular support
- With one approach roller at end

## FEATURES

- 7 alternative positions for inserting tubular supports, clearance between supports 95 mm

## FITTINGS

- 2 swivel castors with brakes, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, or elastic solid-rubber tyres on cast aluminium wheel rim with precision deepgroove ball bearings, black, with foot guard, wheels also available in grey

One approach roller at end  
Use of up to 7 tubular supports possible  
Optionally elastic solid-rubber tyres

### Sheet-material trolley | (without tubular support)


Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-1282 / AG	TR 1310 x 800 x 310	41.5	1200 x 800	500	200 x 40
sw-1283 / AG	ER 1310 x 800 x 310	44.5	1200 x 800	1200	200 x 50
sw-1284 / AG	TR 1710 x 800 x 310	47.0	1600 x 800	500	200 x 40
sw-1285 / AG	ER 1710 x 800 x 310	49.0	1600 x 800	1200	200 x 50

TR = Thermoplastic rubber tyres, ER = Elastic solid-rubber tyres



### Sheet-material stand | (without tubular support)

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg
zu-1286 / AG	1310 x 800 x 75	33.5	1200 x 800	1200
zu-1287 / AG	1710 x 800 x 75	39.5	1600 x 800	1200

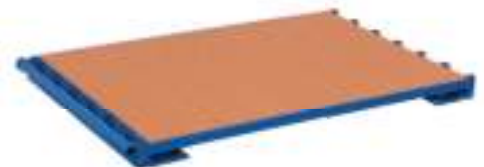

### ADDITIONAL ARTICLE Feet for sheet-material stand

Article-no. + /Colour	Ground clearance (mm)	Weight kg
gzu-1286 / AG	100	1.5



### ADDITIONAL ARTICLE Tubular support

Article-no. + /Colour	Dimension W x H (mm)	Weight kg
zsw-1290 / AG	1200 x 300	2.5
zsw-1291 / AG	1200 x 600	3.5
zsw-1292 / AG	1200 x 900	4.5
zsw-1293 / AG	1600 x 300	3.0
zsw-1294 / AG	1600 x 600	4.0
zsw-1295 / AG	1600 x 900	5.0



# 20 BOX TROLLEYS



RAL 5010

RAL 7016

Side walls of wood-based board or mesh  
End and side walls individually removable

EasySTOP

System trolleys



Side wall fixing

AG

## CONSTRUCTION

- Modular system
- Base structure with innovative frame section

## FEATURES

- Load surface, end and side walls of wood-based board, surface finish beech or coated dark grey or end and side walls of mesh with size 50 x 50 mm
- End and side walls 200 mm high and individually removable

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

### Box trolley | with board panels

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-500.402 / AG	975 x 500 x 975	30.5	860 x 450	400	160 x 40
sw-600.402 / AG	1125 x 600 x 1015	35.0	1010 x 550	500	200 x 40
sw-700.402 / AG	1125 x 700 x 1015	39.5	1010 x 650	500	200 x 40
sw-800.402 / AG	1325 x 800 x 1015	45.5	1210 x 750	500	200 x 40

### Box trolley | with mesh

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-500.457 / AG	975 x 500 x 975	29.0	860 x 450	400	160 x 40
sw-600.457 / AG	1125 x 600 x 1015	33.0	1010 x 550	500	200 x 40
sw-700.457 / AG	1125 x 700 x 1015	37.0	1010 x 650	500	200 x 40
sw-800.457 / AG	1325 x 800 x 1015	43.0	1210 x 750	500	200 x 40

## BOX TROLLEYS



RAL 5010

RAL 7016

## FEATURES

- End and side walls 710 mm high
- With flap-down half wall on one side



710 mm

### Box trolley | with board panels

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-700.406 / AG	1060 x 715 x 1095	73.0	1000 x 650	500	200 x 40
sw-800.406 / AG	1260 x 815 x 1095	84.0	1200 x 750	500	200 x 40

### Box trolley | with mesh

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-700.404 / AG	1060 x 715 x 1095	50.5	1000 x 650	500	200 x 40
sw-800.404 / AG	1260 x 815 x 1095	57.0	1200 x 750	500	200 x 40

BEST SELLER



RAL 5010 RAL 7016

## CONSTRUCTION

- Fix welded angle-steel construction
- Horizontal tubular push bar

## FEATURES

- Load surface, end and side walls of wood-based board, surface finish beech or coated dark grey or end and side walls of mesh with size 50 x 50 mm
- Internal height 800 mm, flap-down half wall on one side
- Double-flap lid, lies flat against side, lockable by device for padlock

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Lockable lid  
Device for padlock  
**EasySTOP**

Box trolley | with board panels and lid | welded |

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.407 / AG	1130 x 730 x 1150	82.0	970 x 670	500	200 x 40
sw-800.407 / AG	1330 x 830 x 1150	96.0	1170 x 770	500	200 x 40



System trolleys

Box trolley | with mesh and lid | welded |

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.405 / AG	1130 x 730 x 1150	72.0	975 x 680	500	200 x 40
sw-800.405 / AG	1330 x 830 x 1150	77.5	1175 x 780	500	200 x 40



RAL 5010 RAL 7016

## FEATURES

- Load surface, end and side walls of steel
- Internal height 810 mm, flap-down half wall on one side
- Without lid or single-flap lid, lies flat against side, with 2 gas pressure springs, lid lockable by device for padlock

Steel box trolley | with lid | welded |

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.415 / AG	1165 x 730 x 1115	99.0	990 x 690	500	200 x 40
sw-800.415 / AG	1365 x 830 x 1115	115.0	1190 x 790	500	200 x 40



Steel box trolley | welded |

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.414 / AG	1130 x 720 x 1105	85.5	990 x 690	500	200 x 40
sw-800.414 / AG	1330 x 820 x 1105	101.0	1190 x 790	500	200 x 40



## STEEL BOX TROLLEYS



# 22 LIGHT TABLE TROLLEYS



2 or 3 load surfaces with edge  
Optionally with drawers  
**EasySTOP**

System trolleys



## CONSTRUCTION

- Modular system
- Base structure with innovative frame section
- Floors set in angle-steel frame

## FEATURES

- Load surfaces of wood-based board, surface finish beech or coated dark grey
- Load surfaces with 15 mm high edge

- Optionally 2 lockable drawers, extractable until 70%, with sliding runners and cylinder lock

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



Table trolley | with 2 load surfaces



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.501 / AG	1025 x 525 x 850	28.0	835 x 490	250	125 x 30
sw-600.501 / AG	1175 x 625 x 850	33.5	985 x 590	250	125 x 30
sw-701.501 / AG	NEW 1175 x 725 x 850	38.5	985 x 690	250	125 x 30
sw-801.501 / AG	NEW 1375 x 825 x 850	45.0	1185 x 790	250	125 x 30

Load capacity shelf: 80 kg\*\*



Inside dimensions of the drawers W: 400 x D: 450 x H: 80 mm (2x)  
Load capacity per drawer: 25 kg  
Drawer divider set on page 80



Table trolley | with 2 load surfaces and 2 drawers

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.504 / AG	1175 x 625 x 850	46.0	985 x 590	250	125 x 30

Also available in ESD design on page 73

Load capacity shelf 80 kg\*\*



Table trolley | with 3 load surfaces



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.603 / AG	1025 x 525 x 850	37.0	835 x 490	250	125 x 30
sw-600.601 / AG	1175 x 625 x 850	44.5	985 x 590	250	125 x 30
sw-700.661 / AG	NEW 1175 x 725 x 850	50.5	985 x 690	250	125 x 30
sw-800.661 / AG	NEW 1375 x 825 x 850	60.5	1185 x 790	250	125 x 30

Load capacity shelf: 80 kg\*\*



RAL 5010 RAL 7016

## CONSTRUCTION

- Modular system
- Base structure with innovative frame section
- Floors set in angle-steel frame
- Optionally tubular push bar with dead man's brake, additional handle beneath the push bar

## FEATURES

- Load surfaces of wood-based board, surface finish beech or coated dark grey
- Load surfaces with 15 mm high edge

- Optionally 2 lockable drawers, extractable until 70%, with sliding runners and cylinder lock

## FITTINGS


- 2 **EasySTOP** swivel castors, 2 fixed castors, or 2 swivel castors with dead man's brake, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

2 or 3 load surfaces with edge

Optionally with drawers

**EasySTOP**

or dead man's brake



System trolleys

**BEST SELLER**

## Table trolley | with 2 load surfaces

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-500.500 / AG	975 x 525 x 1010	28.5	835 x 490	250	125 x 30
sw-600.500 / AG	1125 x 625 x 1010	34.0	985 x 590	250	125 x 30
sw-701.500 / AG	NEW 1125 x 725 x 1010	38.5	985 x 690	250	125 x 30
sw-801.500 / AG	NEW 1325 x 825 x 1010	45.5	1185 x 790	250	125 x 30

Also available in ESD design on page 73

Load capacity shelf: 80 kg\*\*



## Table trolley | with 2 load surfaces and dead man's brake

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-600.548 / AG	1175 x 625 x 1045	37.5	985 x 590	250	125 x 30

Load capacity shelf: 80 kg\*\*



Inside dimensions of the drawers W: 400 x D: 450 x H: 80 mm (2x)  
Load capacity per drawer: 25 kg  
Drawer divider set on page 80

## Table trolley | with 2 load surfaces and 2 drawers

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-600.503 / AG	1125 x 625 x 1010	46.0	985 x 590	250	125 x 30

Also available in ESD design on page 73

Load capacity shelf: 80 kg\*\*



**BEST SELLER**

## Table trolley | with 3 load surfaces

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-500.600 / AG	975 x 525 x 1010	37.5	835 x 490	250	125 x 30
sw-600.600 / AG	1125 x 625 x 1010	45.0	985 x 590	250	125 x 30
sw-700.660 / AG	NEW 1125 x 725 x 1010	51.0	985 x 690	250	125 x 30
sw-800.660 / AG	NEW 1325 x 825 x 1010	61.0	1185 x 790	250	125 x 30

Also available in ESD design on page 73

Load capacity shelf: 80 kg\*\*



\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: atamax@atamax.hu

# 24 TABLE TROLLEYS



Load surfaces flush with frame  
Upper shelf replaceable  
**EasySTOP**

System trolleys



## CONSTRUCTION

- Modular system
- Base structure with innovative frame section

## FEATURES

- Load surfaces of wood-based board, surface finish beech or coated dark grey
- Load surfaces flush with frame
- Upper shelf replaceable

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

### Table trolley | with 2 load surfaces

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.502 / AG	1045 x 500 x 935	30.0	850 x 500	200	125 x 30
sw-600.502 / AG	1195 x 600 x 935	34.0	1000 x 600	200	125 x 30

Load capacity shelf: 80 kg\*\*

## TABLE TROLLEYS



Fixed welded construction  
Edge 17 mm high

## CONSTRUCTION

- Welded steel or aluminium construction

## FEATURES

- Load surfaces of wood-based board, surface finish beech or coated dark grey
- Load surfaces with 17 mm high edge

## FITTINGS

- 2 swivel castors with brakes, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated or aluminium



### Steel table trolley

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
st-402.000 / AG	1090 x 600 x 970	33.0	970 x 570	200	125 x 30

Load capacity shelf: 100 kg\*\*

### Aluminium table trolley

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
ap-412.000	1090 x 600 x 975	24.0	970 x 570	200	125 x 30

Load capacity shelf: 100 kg\*\*

## INDIVIDUALLY

- Opportunities for modification in line with customers' individual wishes

## UNIQUE PIECE

- Deliveries of small series from one piece upwards
- Product approval drawings
- Fair prices even for small quantities

## CUSTOMER FOCUSED

- Analysing parameters such as uses, handling, workflows and much more in close cooperation with the customer

## TAILORED

- Products in special sizes, special colours and complete new designs

Our custom-made products in comparison



# Individually thought out

The best solution for each of your ideas



Customizing

# 26 HEAVY-DUTY TABLE TROLLEYS



RAL 5010

RAL 7016

Load surfaces flush with frame

Wood-based board  
or galvanised sheet

**EasySTOP**

System trolleys



## CONSTRUCTION

- Modular system
- Base structure with innovative frame section

## FEATURES

- Load surfaces of wood-based board, surface finish beech or coated dark grey, or covered with galvanised sheet (folded over load surface)
- Load surfaces flush with frame

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

**BEST SELLER**



Heavy-duty table trolley | with 2 load surfaces

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.504 / AG	1040 x 500 x 880	34.0	850 x 500	400	160 x 40
sw-600.510 / AG	1190 x 600 x 920	40.5	1000 x 600	500	200 x 40
sw-700.500 / AG	1190 x 700 x 920	46.0	1000 x 700	500	200 x 40
sw-800.500 / AG	1390 x 800 x 920	51.5	1200 x 800	500	200 x 40

Also available in ESD design on page 74

Load capacity shelf: 200 kg\*\*



Heavy-duty table trolley | with 2 load surfaces covered with galvanised sheet

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.505 / AG	1190 x 700 x 920	55.0	1000 x 700	500	200 x 40
sw-800.505 / AG	1390 x 800 x 920	65.0	1200 x 800	500	200 x 40

Load capacity shelf: 200 kg\*\*



Heavy-duty table trolley | with 3 load surfaces

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.650 / AG	1040 x 500 x 880	44.5	850 x 500	400	160 x 40
sw-600.512 / AG	1190 x 600 x 920	54.5	1000 x 600	500	200 x 40
sw-700.600 / AG	1190 x 700 x 920	55.5	1000 x 700	500	200 x 40
sw-800.600 / AG	1390 x 800 x 920	67.5	1200 x 800	500	200 x 40

Also available in ESD design on page 74

Load capacity shelf: 200 kg\*\*



Heavy-duty table trolley | with 4 load surfaces

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.700 / AG	1190 x 700 x 1235	74.5	1000 x 700	500	200 x 40
sw-800.700 / AG	1390 x 800 x 1235	87.5	1200 x 800	500	200 x 40

Load capacity shelf: 200 kg\*\*



RAL 5010 RAL 7016

## CONSTRUCTION

- Modular system
- Base structure with innovative frame section

## FEATURES

- Load surfaces of waterproof bonded plywood, surface finish screen printed, anti-slip
- Load surfaces flush with frame

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Elastic solid-rubber tyres on cast aluminium wheel rim with precision deepgroove ball bearings, black, with foot guard, wheels also available in grey
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Load surfaces flush with frame  
Surfaces of waterproof bonded plywood  
**EasySTOP**



### Heavy-duty table trolley | with 2 load surfaces

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.530 / AG	1190 x 700 x 925	60.5	995 x 700	1000	200 x 50
sw-800.502 / AG	1390 x 800 x 925	66.5	1195 x 800	1000	200 x 50
sw-800.511 / AG	1790 x 800 x 925	82.5	1595 x 800	1000	200 x 50
sw-800.514 / AG	2190 x 800 x 925	95.5	1995 x 800	1000	200 x 50

Load capacity shelf: 500 kg\*\*



### Heavy-duty table trolley | with 3 load surfaces

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.617 / AG	1190 x 700 x 925	73.5	995 x 700	1000	200 x 50
sw-800.617 / AG	1390 x 800 x 925	92.0	1195 x 800	1000	200 x 50
sw-800.618 / AG	1790 x 800 x 925	105.5	1595 x 800	1000	200 x 50
sw-800.619 / AG	2190 x 800 x 925	135.0	1995 x 800	1000	200 x 50

Load capacity shelf: 500 kg\*\*



System trolleys

\*\*Static distributed load; Total load of the transport device must not be exceeded!

# 28 TABLE TROLLEYS WITH PAN



RAL 5010

RAL 7016

Oil-tight pans  
Edge 40 mm high  
**EasySTOP**

## CONSTRUCTION

- Welded steel construction, screwed

## FEATURES

- Oil-tight pans and with 40 mm high edge

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

System trolleys



Table trolley | with 2 load surfaces

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.510 / AG	985 x 500 x 910	36.5	845 x 495	400	160 x 40
sw-700.510 / AG	1135 x 700 x 950	50.0	995 x 695	400	200 x 40

Load capacity shelf: 100 kg\*\*

Table trolley | with 3 load surfaces

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.610 / AG	985 x 500 x 910	44.5	845 x 495	400	160 x 40
sw-700.610 / AG	1135 x 700 x 950	63.5	995 x 695	400	200 x 40

Load capacity shelf: 100 kg\*\*

Table trolley | with 2 load surfaces

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.523 / AG	1015 x 500 x 1025	36.5	845 x 495	400	160 x 40
sw-700.523 / AG	1165 x 700 x 1065	50.0	995 x 695	400	200 x 40

Load capacity shelf: 100 kg\*\*

Table trolley | with 3 load surfaces

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.698 / AG	1015 x 500 x 1025	45.0	845 x 495	400	160 x 40
sw-700.623 / AG	1165 x 700 x 1065	63.5	995 x 695	400	200 x 40

Load capacity shelf: 100 kg\*\*



RAL 5010 RAL 7016

## CONSTRUCTION

- Welded steel construction, screwed

## FEATURES

- Oil-tight pans with 25 mm high edge
- Alternative with removable steel-sheet pan (113 l), sides 200 mm high, 2 handles
- Or with screwed drip tray (60 l), sides 100 mm high, incl. galvanised grating, mesh size 30 x 30 mm, conical outlet cock 1/4"

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Oil-tight pans  
Edge 25 mm high  
Removable or screwed  
Steel-sheet pan



System trolleys

Table trolley | with 2 load surfaces and removable steel-sheet pan



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.507 / AG	1180 x 610 x 1055	49.5	995 x 595	250	125 x 30

Load capacity shelf: 80 kg\*\*



## ADDITIONAL ARTICLE Removable steel-sheet pan

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Volume l
gsw-600.507 / AG	1075 x 590 x 235	12.5	985 x 585	113



Table trolley | with 2 load surfaces



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.506 / AG	1170 x 610 x 845	37.0	995 x 595	250	125 x 30

Load capacity shelf: 80 kg\*\*



Table trolley | with 2 load surfaces and galvanised grating



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.505 / AG	1125 x 610 x 1020	58.0	995 x 595	250	125 x 30

Load capacity shelf: 80 kg\*\*



\*\*Static distributed load; Total load of the transport device must not be exceeded!






RAL 5010

RAL 7016

Shelves and trays  
Variable removable  
**EasySTOP**

System trolleys

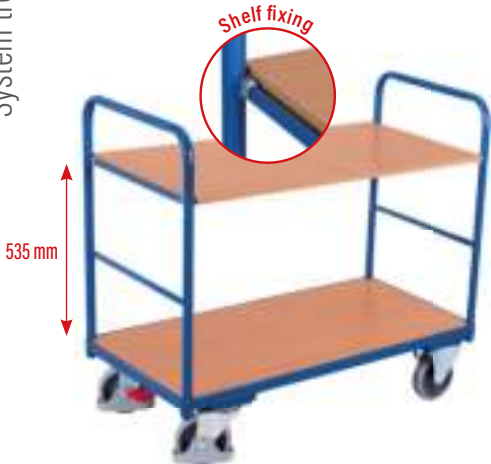

## CONSTRUCTION

- Modular system
- Base structure with innovative frame section

## FEATURES

- Load surface, shelves and trays of wood-based board, surface finish beech or coated dark grey
- Shelves and trays replaceable and variable removable, tray height 45 mm inside and 60 mm outside

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

### Shelf trolley | low

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-500.205 / AG	910 x 500 x 990	31.5	850 x 500	250	160 x 40
sw-600.205 / AG	1060 x 600 x 990	43.0	1000 x 600	250	160 x 40
sw-700.239 / AG	1060 x 700 x 990	48.0	1000 x 700	250	160 x 40
sw-800.239 / AG	1260 x 800 x 990	52.5	1200 x 800	250	160 x 40

Load capacity shelf: 80 kg\*\*

### Shelf trolley | low

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface Tray WxD (mm)	Load cap. kg	Wheel diam. mm
sw-500.207 / AG	910 x 500 x 990	34.0	815 x 455	250	160 x 40
sw-600.207 / AG	1060 x 600 x 990	43.0	965 x 555	250	160 x 40
sw-700.242 / AG	1060 x 700 x 990	51.0	965 x 655	250	160 x 40
sw-800.242 / AG	1260 x 800 x 990	63.5	1165 x 755	250	160 x 40

Load capacity shelf: 80 kg\*\*

### Shelf trolley | low

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface Tray WxD (mm)	Load cap. kg	Wheel diam. mm
sw-500.208 / AG	910 x 500 x 990	35.0	815 x 455	250	160 x 40
sw-600.208 / AG	1060 x 600 x 990	43.5	965 x 555	250	160 x 40
sw-700.243 / AG	1060 x 700 x 990	52.5	965 x 655	250	160 x 40
sw-800.243 / AG	1260 x 800 x 990	64.5	1165 x 755	250	160 x 40

Load capacity shelf: 80 kg\*\*

## ADDITIONAL ARTICLES Shelves for shelf trolleys

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	For loading surface WxD (mm)	Load cap. kg
zsw-500.205 / G	845 x 485	6.5	850 x 500	80
zsw-600.210 / G	995 x 585	8.0	1000 x 600	80
zsw-700.210 / G	995 x 685	10.5	1000 x 700	80
zsw-800.210 / G	1195 x 785	14.5	1200 x 800	80

\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: atamax@atamax.hu



RAL 5010 RAL 7016

## CONSTRUCTION

- Modular system
- Base structure with innovative frame section

## FEATURES

- Load surface, shelves and trays of wood-based board, surface finish beech or coated dark grey
- Shelves and trays replaceable and variable removable, tray height 45 mm inside and 60 mm outside

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Shelves and trays  
Variable removable  
**EasySTOP**



System trolleys

### Shelf trolley | low



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.206 / AG	910 x 500 x 990	37.0	850 x 500	250	160 x 40
sw-600.206 / AG	1060 x 600 x 990	46.0	1000 x 600	250	160 x 40
sw-700.240 / AG	1060 x 700 x 990	54.5	1000 x 700	250	160 x 40
sw-800.240 / AG	1260 x 800 x 990	67.0	1200 x 800	250	160 x 40

Also available in ESD design on page 69

Load capacity shelf: 80 kg\*\*



### Shelf trolley | low



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface Tray W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.210 / AG	910 x 500 x 990	38.0	815 x 455	250	160 x 40
sw-600.210 / AG	1060 x 600 x 990	47.0	965 x 555	250	160 x 40
sw-700.241 / AG	1060 x 700 x 990	55.5	965 x 655	250	160 x 40
sw-800.241 / AG	1260 x 800 x 990	68.5	1165 x 755	250	160 x 40

Load capacity shelf: 80 kg\*\*



### Shelf trolley | low



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface Tray W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.209 / AG	910 x 500 x 990	45.0	815 x 455	250	160 x 40
sw-600.209 / AG	1060 x 600 x 990	51.5	965 x 555	250	160 x 40
sw-700.244 / AG	1060 x 700 x 990	60.0	965 x 655	250	160 x 40
sw-800.244 / AG	1260 x 800 x 990	69.5	1165 x 755	250	160 x 40

Load capacity shelf: 80 kg\*\*



## ADDITIONAL ARTICLES Trays for shelf trolleys

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	For loading surface W x D (mm)	Load cap. kg
zsw-500.209 / G	815 x 455 x 45	6.5	850 x 500	80
zsw-600.209 / G	965 x 555 x 45	9.0	1000 x 600	80
zsw-700.209 / G	965 x 655 x 45	10.5	1000 x 700	80
zsw-800.209 / G	1165 x 755 x 45	15.0	1200 x 800	80



\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: atamax@atamax.hu

# 32 SHELF TROLLEYS



Shelves and trays  
Variable removable  
**EasySTOP** or dead man's brake



System trolleys

## CONSTRUCTION

- Modular system
- Base structure with innovative frame section
- Optionally tubular push bar with dead man's brake, additional handle beneath the push bar

## FEATURES

- Load surface and shelves of wood-based board, surface finish beech or coated dark grey
- Shelves replaceable and variable removable

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors or 2 swivel castors with dead man's brake, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



### Shelf trolley | high

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.211 / AG	910 x 500 x 1530	42.0	850 x 500	250	160 x 40
sw-600.211 / AG	1060 x 600 x 1530	51.0	1000 x 600	250	160 x 40
sw-700.245 / AG	1060 x 700 x 1530	60.0	1000 x 700	250	160 x 40
sw-800.245 / AG	1260 x 800 x 1530	73.0	1200 x 800	250	160 x 40

Also available in ESD design on page 69

Load capacity shelf: 80 kg\*\*

### Shelf trolley | high with dead man's brake

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.265 / AG	1220 x 610 x 1530	56.5	1000 x 600	250	160 x 40

Load capacity shelf: 80 kg\*\*

### Shelf trolley | high

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.212 / AG	910 x 500 x 1530	54.0	850 x 500	250	160 x 40
sw-600.212 / AG	1060 x 600 x 1530	68.5	1000 x 600	250	160 x 40
sw-700.246 / AG	1060 x 700 x 1530	80.5	1000 x 700	250	160 x 40
sw-800.246 / AG	1260 x 800 x 1530	101.5	1200 x 800	250	160 x 40

Also available in ESD design on page 69

Load capacity shelf: 80 kg\*\*



RAL 5010 RAL 7016

## CONSTRUCTION

- Modular system
- Base structure with innovative frame section

## FEATURES

- Load surface and trays of wood-based board, surface finish beech or coated dark grey
- Trays replaceable and variable removable, tray height 45 mm inside and 60 mm outside

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Shelves and trays  
Variable removable  
**EasySTOP**



System trolleys

### Shelf trolley | high



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface Tray W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.213 / AG	910 x 500 x 1530	45.0	815 x 455	250	160 x 40
sw-600.213 / AG	1060 x 600 x 1530	56.0	965 x 555	250	160 x 40
sw-700.247 / AG	1060 x 700 x 1530	65.5	965 x 655	250	160 x 40
sw-800.247 / AG	1260 x 800 x 1530	80.0	1165 x 755	250	160 x 40

Load capacity shelf: 80 kg\*\*



### Shelf trolley | high



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface Tray W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.214 / AG	910 x 500 x 1530	60.0	815 x 455	250	160 x 40
sw-600.214 / AG	1060 x 600 x 1530	72.5	965 x 555	250	160 x 40
sw-700.248 / AG	1060 x 700 x 1530	85.5	965 x 655	250	160 x 40
sw-800.248 / AG	1260 x 800 x 1530	105.0	1165 x 755	250	160 x 40

Load capacity shelf: 80 kg\*\*



### ADDITIONAL ARTICLES Trays for shelf trolleys

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	For loading surface W x D (mm)	Load cap. kg
zsw-500.209 / G	815 x 455 x 45	6.5	850 x 500	80
zsw-600.209 / G	965 x 555 x 45	9.0	1000 x 600	80
zsw-700.209 / G	965 x 655 x 45	10.5	1000 x 700	80
zsw-800.209 / G	1165 x 755 x 45	15.0	1200 x 800	80



### ADDITIONAL ARTICLES Shelves for shelf trolleys

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	For loading surface W x D (mm)	Load cap. kg
zsw-500.205 / G	845 x 485	6.5	850 x 500	80
zsw-600.210 / G	995 x 585	8.0	1000 x 600	80
zsw-700.210 / G	995 x 685	10.5	1000 x 700	80
zsw-800.210 / G	1195 x 785	14.0	1200 x 800	80



\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: atamax@atamax.hu


# 34 PARCEL TROLLEYS



RAL 5010

RAL 7016

Mesh sides and ends  
Side walls variable removable  
**EasySTOP**



System trolleys

## CONSTRUCTION

- Modular system
- Base structure with innovative frame section

## FEATURES

- Load surfaces of wood-based board, surface finish beech or coated dark grey
- Optionally removable shelves for insertion at 120 mm intervals

- Mesh sides and ends, mesh size 120 x 120 mm
- Side walls replaceable and variable removable

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



### Three-sided parcel trolley | high

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-500.306 / AG	1040 x 525 x 1780	43.0	850 x 500	400	160 x 40
sw-600.306 / AG	1190 x 625 x 1820	52.0	1000 x 600	500	200 x 40
sw-700.306 / AG	1190 x 725 x 1820	60.5	1000 x 700	500	200 x 40
sw-800.306 / AG	1390 x 825 x 1820	68.5	1200 x 800	500	200 x 40



### Four-sided parcel trolley | high

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-500.405 / AG	1040 x 540 x 1780	49.0	850 x 500	400	160 x 40
sw-600.405 / AG	1190 x 640 x 1820	57.5	1000 x 600	500	200 x 40
sw-700.403 / AG	1190 x 740 x 1820	68.0	1000 x 700	500	200 x 40
sw-800.403 / AG	1390 x 840 x 1820	76.0	1200 x 800	500	200 x 40



### Three-sided parcel trolley | low

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-500.313 / AG	1040 x 525 x 1180	35.0	850 x 500	400	160 x 40
sw-600.313 / AG	1190 x 625 x 1220	43.0	1000 x 600	500	200 x 40
sw-700.313 / AG	1190 x 725 x 1220	50.5	1000 x 700	500	200 x 40
sw-800.313 / AG	1390 x 825 x 1220	57.5	1200 x 800	500	200 x 40



### Four-sided parcel trolley | low

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-500.420 / AG	1040 x 540 x 1180	40.0	850 x 500	400	160 x 40
sw-600.420 / AG	1190 x 640 x 1220	47.0	1000 x 600	500	200 x 40
sw-700.220 / AG	1190 x 740 x 1220	54.5	1000 x 700	500	200 x 40
sw-800.220 / AG	1390 x 840 x 1220	61.5	1200 x 800	500	200 x 40



RAL 5010 RAL 7016

## CONSTRUCTION

- Modular system
- Base structure with innovative frame section

## FEATURES

- Load surfaces and shelves of wood-based board, surface finish beech or coated dark grey
- Optionally removable shelves for insertion at 120 mm intervals

- Mesh sides and ends, mesh size 120 x 120 mm
- Side walls replaceable and variable removable

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Mesh sides and ends  
Side walls variable removable  
Optionally shelves  
**EasySTOP**



System trolleys

### Shelf trolley | low



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.235 / AG	1035 x 520 x 1180	55.0	850 x 500	400	160 x 40
sw-600.235 / AG	1185 x 620 x 1220	63.0	1000 x 600	500	200 x 40
sw-700.215 / AG	1185 x 720 x 1220	67.5	1000 x 700	500	200 x 40
sw-800.215 / AG	1385 x 820 x 1220	79.0	1200 x 800	500	200 x 40

Load capacity shelf: 80 kg\*\*



### Shelf trolley | low



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.307 / AG	1040 x 525 x 1180	59.0	850 x 500	400	160 x 40
sw-600.307 / AG	1190 x 625 x 1220	66.5	1000 x 600	500	200 x 40
sw-700.303 / AG	1190 x 725 x 1220	70.5	1000 x 700	500	200 x 40
sw-800.303 / AG	1390 x 825 x 1220	85.0	1200 x 800	500	200 x 40

Load capacity shelf: 80 kg\*\*



### Shelf trolley | low



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.460 / AG	1040 x 540 x 1180	61.5	850 x 500	400	160 x 40
sw-600.460 / AG	1190 x 640 x 1220	73.0	1000 x 600	500	200 x 40
sw-700.460 / AG	1190 x 740 x 1220	76.5	1000 x 700	500	200 x 40
sw-800.460 / AG	1390 x 840 x 1220	92.0	1200 x 800	500	200 x 40

Load capacity shelf: 80 kg\*\*



### ADDITIONAL ARTICLES Shelves for parcel/shelf trolleys

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	For loading surface W x D (mm)	Load cap. kg
zsw-500.218 / G	835 x 470	8.0	850 x 500	80
zsw-600.218 / G	985 x 570	10.0	1000 x 600	80
zsw-700.218 / G	985 x 670	12.0	1000 x 700	80
zsw-800.218 / G	1185 x 770	16.0	1200 x 800	80



### ADDITIONAL ARTICLES Side walls for parcel/shelf trolleys, low

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	For loading surface W x D (mm)
gsw-500.303 / AG	925 x 925	5.5	850 x 500
gsw-700.303.2 / AG	1075 x 925	6.0	1000 x 600
gsw-700.303.2 / AG	1075 x 925	6.0	1000 x 700
gsw-800.303.2 / AG	1275 x 925	8.0	1200 x 800



\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: atamax@atamax.hu



RAL 5010

RAL 7016

Mesh ends  
Optionally shelves  
**EasySTOP** or dead man's brake

System trolleys



## CONSTRUCTION

- Modular system
- Base structure with innovative frame section
- Optionally tubular push bar with dead man's brake, additional handle beneath the push bar

## FEATURES

- Load surface and shelves of wood-based board, surface finish beech or coated dark grey
- Optionally removable shelves for insertion at 120 mm intervals
- Mesh ends, mesh size 120 x 120 mm

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors or 2 swivel castors with dead man's brake, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



### Shelf trolley | high

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.236 / AG	1035 x 520 x 1780	64.0	850 x 500	400	160 x 40
sw-600.236 / AG	1185 x 620 x 1820	81.0	1000 x 600	500	200 x 40
sw-700.216 / AG	1185 x 720 x 1820	84.0	1000 x 700	500	200 x 40
sw-800.216 / AG	1385 x 820 x 1820	102.5	1200 x 800	500	200 x 40

Load capacity shelf: 80 kg\*\*



Brake applied  
Brake released

### Shelf trolley | high with dead man's brake

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.280 / AG	1195 x 715 x 1825	83.0	1000 x 700	500	200 x 40


Load capacity shelf: 80 kg\*\*



### Shelf trolley | high

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.237 / AG	1035 x 520 x 1780	70.0	850 x 500	400	160 x 40
sw-600.237 / AG	1185 x 620 x 1820	87.5	1000 x 600	500	200 x 40
sw-700.217 / AG	1185 x 720 x 1820	95.5	1000 x 700	500	200 x 40
sw-800.217 / AG	1385 x 820 x 1820	116.0	1200 x 800	500	200 x 40

Load capacity shelf: 80 kg\*\*



### ADDITIONAL ARTICLES Side walls for parcel/shelf trolleys, high

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	For loading surface W x D (mm)
gsw-500.304 / AG	925 x 1525	8.0	850 x 500
gsw-700.304.2 / AG	1075 x 1525	9.0	1000 x 600
gsw-700.304.2 / AG	1075 x 1525	9.0	1000 x 700
gsw-800.304.2 / AG	1275 x 1525	10.5	1200 x 800



RAL 5010 RAL 7016

## CONSTRUCTION

- Modular system
- Base structure with innovative frame section

## FEATURES

- Load surface and shelves of wood-based board, surface finish beech or coated dark grey
- Optionally removable shelves for insertion at 120 mm intervals
- Mesh sides and ends, mesh size 120 x 120 mm
- Side walls replaceable and variable removable

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Mesh sides and ends  
Side walls variable removable  
Optionally shelves  
**EasySTOP**



System trolleys

### Shelf trolley | high



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.304 / AG	1040 x 525 x 1780	73.5	850 x 500	400	160 x 40
sw-600.304 / AG	1190 x 625 x 1820	86.5	1000 x 600	500	200 x 40
sw-700.304 / AG	1190 x 725 x 1820	91.0	1000 x 700	500	200 x 40
sw-800.304 / AG	1390 x 825 x 1820	103.0	1200 x 800	500	200 x 40

Load capacity shelf: 80 kg\*\*



### Shelf trolley | high



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.311 / AG	1040 x 540 x 1780	83.5	850 x 500	400	160 x 40
sw-600.311 / AG	1190 x 640 x 1820	96.5	1000 x 600	500	200 x 40
sw-700.311 / AG	1190 x 740 x 1820	101.0	1000 x 700	500	200 x 40
sw-800.311 / AG	1390 x 840 x 1820	113.0	1200 x 800	500	200 x 40

Load capacity shelf: 80 kg\*\*



### Shelf trolley | high



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.305 / AG	1040 x 525 x 1780	78.5	850 x 500	400	160 x 40
sw-600.305 / AG	1190 x 625 x 1820	91.5	1000 x 600	500	200 x 40
sw-700.305 / AG	1190 x 725 x 1820	96.0	1000 x 700	500	200 x 40
sw-800.305 / AG	1390 x 825 x 1820	108.0	1200 x 800	500	200 x 40

Load capacity shelf: 80 kg\*\*



### ADDITIONAL ARTICLES Side wall with folding top half for parcel/shelf trolleys, high

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	For loading surface W x D (mm)
gsw-500.305 / AG	945 x 1525	9.0	850 x 500
gsw-600.305 / AG	1095 x 1525	10.5	1000 x 600
gsw-700.305 / AG	1095 x 1525	12.0	1000 x 700
gsw-800.305 / AG	1295 x 1525	15.0	1200 x 800



\*\*Static distributed load; Total load of the transport device must not be exceeded!





End and side walls open or with mesh  
Folding shelves  
Fixed welded tubular push bar  
**EasySTOP**

System trolleys



## CONSTRUCTION

- Welded steel construction
- Base structure with innovative frame section

## FEATURES

- Load surface and shelves of wood-based board, surface finish beech or coated dark grey
- Folding shelves
- End and side walls open or with mesh, mesh size 100 x 200 mm

## FITTINGS


- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



Shelf trolley | high with folding shelves

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.250 / AG	1200 x 700 x 1890	73.0	975 x 700	500	200 x 40
sw-800.250 / AG	1400 x 800 x 1890	84.5	1175 x 800	500	200 x 40

Load capacity shelf: 50 kg\*\*

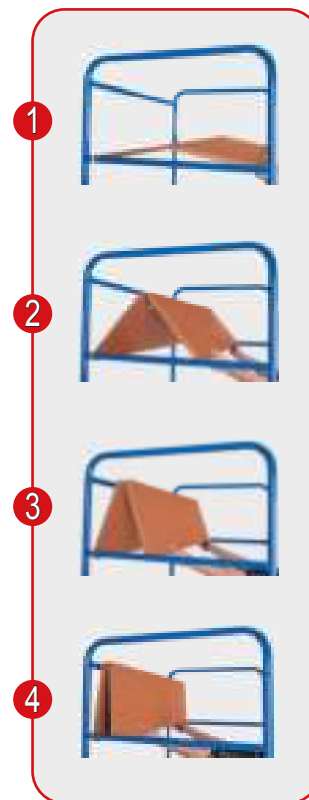

Shelf trolley | high with folding shelves

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.238 / AG	1200 x 700 x 1890	67.5	975 x 700	500	200 x 40
sw-800.238 / AG	1400 x 800 x 1890	80.0	1175 x 800	500	200 x 40

Load capacity shelf: 50 kg\*\*

## INDIVIDUALLY

- Opportunities for modification in line with customers' individual wishes

## UNIQUE PIECE

- Deliveries of small series from one piece upwards
- Product approval drawings
- Fair prices even for small quantities

## CUSTOMER FOCUSED

- Analysing parameters such as uses, handling, workflows and much more in close cooperation with the customer

## TAILORED

- Products in special sizes, special colours and complete new designs

Our custom-made products in comparison



STANDARD

Special designs?  
Please feel free  
to contact us!



STANDARD



Customizing

# 40 SHELF TROLLEYS

Walls, roof and doors with mesh  
Optionally with double wing door, lockable  
**EasySTOP**

System trolleys



AG



## CONSTRUCTION

- Fixed welded angle-steel construction
- End and side walls, roof and doors with mesh sides 50 x 50 mm

## FEATURES

- Load surfaces and optionally shelves of wood-based board, surface finish beech or coated dark grey
- Shelf supports for variable insertion at 50 mm intervals
- Double wing doors with espagnolette bolt lock and T-handle or lever

- Cylinder lock, incl. 2 keys (different locking)
- Push/pull bar with soft plastic grip cover

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



RAL 5010

RAL 7016

PRICE PERFORMANCE

Shelf trolley | fixed welded


Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.410 / AG	1115 x 730 x 1810	103.5	1045 x 685	500	200 x 40
sw-800.410 / AG	1315 x 830 x 1810	120.5	1245 x 785	500	200 x 40

Also available in ESD design on page 67

Load capacity shelf: 80 kg\*\*

Shelf trolley | fixed welded

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.440 / AG	1115 x 810 x 1810	77.0	1045 x 685	500	200 x 40
sw-800.440 / AG	1315 x 910 x 1810	89.5	1245 x 785	500	200 x 40



Adjusts to the height of the person pulling when the trolley is being pulled and is flush with the frame when not in use



Rests against the cross tube when pushed, for safe and comfortable pushing



Can be opened 270° and is flush with the frame

NEW

Shelf trolley | fixed welded

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.946 / AG	1115 x 730 x 1810	77.0	1045 x 685	500	200 x 40
sw-800.984 / AG	1315 x 830 x 1810	89.5	1245 x 785	500	200 x 40



RAL 5010 RAL 7016

## CONSTRUCTION

- Fixed welded angle-steel construction
- End and side walls, roof and doors with mesh sides 50 x 50 mm

## FEATURES

- Load surfaces and optionally shelves of wood-based board, surface finish beech or coated dark grey
- Shelf supports for variable insertion at 50 mm intervals
- Double wing doors with espagnolette bolt lock and T-handle or lever

- Cylinder lock, incl. 2 keys (different locking)
- Push/pull bar with soft plastic grip cover

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Walls, roof and doors with mesh  
Double wing door, lockable  
**EasySTOP**



System trolleys



Shelf trolley | fixed welded



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.411 / AG	1115 x 810 x 1810	117.5	1045 x 685	500	200 x 40
sw-800.411 / AG	1315 x 910 x 1810	140.0	1245 x 785	500	200 x 40

Load capacity shelf: 80 kg\*\*



Shelf trolley | fixed welded

PRICE PERFORMANCE



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.987 / AG	1115 x 730 x 1810	117.5	1045 x 685	500	200 x 40
sw-800.987 / AG	1315 x 830 x 1810	140.0	1245 x 785	500	200 x 40

Also available in ESD design on page 67

Load capacity shelf: 80 kg\*\*



## ADDITIONAL ARTICLES Shelves for shelf trolleys

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	For loading surface W x D (mm)	Load cap. kg
-----------------------	-----------------------------	--------------	-----------------------------------	-----------------

### SHELVES OF WOOD-BASED BOARD

zsw-700.411 / G	1030 x 660	11.5	1045 x 685	80
zsw-800.411 / G	1230 x 760	16.0	1245 x 785	80

### SHELVES OF PLYWOOD

zsw-700.412	1030 x 660	11.0	1045 x 685	120
zsw-800.412	1230 x 760	14.5	1245 x 785	120

### SHELVES OF WATERPROOF BONDED PLYWOOD surface finish screen printed

zsw-700.416	1030 x 660	11.5	1045 x 685	120
zsw-800.416	1230 x 760	15.5	1245 x 785	120

### GROUND SHELVES OF WATERPROOF BONDED PLYWOOD surface finish screen printed

zsw-700.441 *	1045 x 685		1045 x 685	according to the shelf trolley
zsw-800.441 *	1245 x 785		1245 x 785	

\*In exchange for wood-based board, as ex-factory equipment



\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: atamax@atamax.hu

# 42 SHELF TROLLEYS



RAL 5010

RAL 7016

Walls, roof and doors of galvanised steel sheet  
Optionally with double wing door, lockable

System trolleys



AG

## CONSTRUCTION

- Fixed welded angle-steel construction
- End and side walls, roof and doors of galvanised steel sheet

## FEATURES

- Load surfaces and optionally shelves of wood-based board, surface finish beech or coated dark grey
- Shelf supports for variable insertion at 100 mm intervals
- Double wing doors with espagnolette bolt lock and T-handle or lever

- Cylinder lock, incl. 2 keys (different locking)
- Push/pull bar with soft plastic grip cover

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



Roller shutter door

For suitable models on request

## Shelf trolley | fixed welded

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.412 / AG	1115 x 730 x 1810	123.0	1045 x 685	500	200 x 40
sw-800.412 / AG	1315 x 830 x 1810	153.0	1245 x 785	500	200 x 40


Also available in ESD design on page 68

Load capacity shelf: 80 kg\*\*



Double wing door


Can be opened 270° and is flush with the frame



Lever lock

## Shelf trolley | fixed welded

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.448 / AG	1115 x 810 x 1810	107.0	1045 x 685	500	200 x 40
sw-800.448 / AG	1315 x 910 x 1810	124.0	1245 x 785	500	200 x 40



Push/pull bar

Adjusts to the height of the person pulling when the trolley is being pulled and is flush with the frame when not in use



Push/pull bar

Rests against the cross tube when pushed, for safe and comfortable pushing



T-handle lock

## Shelf trolley | fixed welded



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.668 / AG	1115 x 730 x 1810	107.0	1045 x 685	500	200 x 40
sw-800.668 / AG	1315 x 830 x 1810	124.0	1245 x 785	500	200 x 40



RAL 5010 RAL 7016

## CONSTRUCTION

- Fixed welded angle-steel construction
- End and side walls, roof and doors of galvanised steel sheet

## FEATURES

- Load surfaces and optionally shelves of wood-based board, surface finish beech or coated dark grey
- Shelf supports for variable insertion at 100 mm intervals
- Double wing doors with espagnolette bolt lock and T-handle or lever

- Cylinder lock, incl. 2 keys (different locking)
- Push/pull bar with soft plastic grip cover

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Walls, roof and doors of galvanised steel sheet  
Double wing door, lockable  
**EasySTOP**



System trolleys

Shelf trolley | fixed welded



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.413 / AG	1115 x 810 x 1810	138.0	1045 x 685	500	200 x 40
sw-800.413 / AG	1315 x 910 x 1810	171.5	1245 x 785	500	200 x 40

Load capacity shelf: 80 kg\*\*



Shelf trolley | fixed welded



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.988 / AG	1115 x 730 x 1810	138.0	1045 x 685	500	200 x 40
sw-800.988 / AG	1315 x 830 x 1810	171.5	1245 x 785	500	200 x 40

Also available in ESD design on page 68

Load capacity shelf: 80 kg\*\*



## ADDITIONAL ARTICLES Shelves for shelf trolleys

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	For loading surface W x D (mm)	Load cap. kg
-----------------------	-----------------------------	--------------	-----------------------------------	-----------------

### SHELVES OF WOOD-BASED BOARD

zsw-700.413 / G	1030 x 660	11.5	1045 x 685	80
zsw-800.413 / G	1230 x 760	16.0	1245 x 785	80

### SHELVES OF PLYWOOD

zsw-700.414	1030 x 660	11.0	1045 x 685	120
zsw-800.414	1230 x 760	14.5	1245 x 785	120

### SHELVES OF WATERPROOF BONDED PLYWOOD surface finish screen printed

zsw-700.417	1030 x 660	11.5	1045 x 685	120
zsw-800.417	1230 x 760	15.5	1245 x 785	120

### GROUND SHELVES OF WATERPROOF BONDED PLYWOOD surface finish screen printed

zsw-700.441 *	1045 x 685		1045 x 685	according to the shelf trolley
zsw-800.441 *	1245 x 785		1245 x 785	

\*In exchange for wood-based board, as ex-factory equipment

\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: atamax@atamax.hu



# 44 SHELF TROLLEYS



Tilting shelves with edge  
Shelves of wood-based board,  
variable insertion

**EasySTOP**

System trolleys



## CONSTRUCTION

- Modular system
- Base structure with innovative frame section
- Fixed welded tubular push bar

## FEATURES

- Load surfaces of wood-based board, surface finish beech or coated dark grey
- For sloping or horizontal insertion, shelf support interval 120 mm

- Gradient when sloping 15 degrees
- 15 mm high edge on the long side

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



Shelf trolley | with 2 wooden shelves

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-540.200 / AG	1510 x 550 x 1235	56.0	1355 x 550	250	160 x 40
sw-640.200 / AG	1805 x 650 x 1275	64.5	1650 x 650	400	200 x 40

Load capacity shelf: 80 kg\*\*



Shelf trolley | with 3 wooden shelves


Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-540.201 / AG	1510 x 550 x 1535	72.0	1355 x 550	250	160 x 40
sw-640.201 / AG	1805 x 650 x 1575	87.0	1650 x 650	400	200 x 40

Load capacity shelf: 80 kg\*\*

For suitable  
shelf trolleys  
on request




Shelves for  
insertion diagonally  
or horizontal



Shelf trolley | with 4 wooden shelves

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-540.202 / AG	1510 x 550 x 1815	87.0	1355 x 550	250	160 x 40
sw-640.202 / AG	1805 x 650 x 1855	101.5	1650 x 650	400	200 x 40

Load capacity shelf: 80 kg\*\*



## ADDITIONAL ARTICLES Wooden shelves for shelf trolleys

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	For loading surface W x D (mm)	Load cap. kg
zsw-540.202 / AG	1320 x 535	12.5	1355 x 550	80
zsw-640.202 / AG	1615 x 635	16.0	1650 x 650	80



RAL 5010 RAL 7016

## CONSTRUCTION

- Modular system
- Base structure with innovative frame section
- Fixed welded tubular push bar

## FEATURES

- Load surfaces with mesh size 50 x 50 mm
- For sloping or horizontal insertion, shelf support interval 120 mm

- Gradient when sloping 15 degrees
- 15 mm high edge on the long side

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Tilting shelves with edge  
Shelves of mesh,  
variable insertion  
**EasySTOP**



System trolleys

### Shelf trolley | with 2 mesh shelves



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-540.223 / AG	1510 x 550 x 1235	47.0	1355 x 550	250	160 x 40
sw-640.223 / AG	1805 x 650 x 1275	56.5	1650 x 650	400	200 x 40

Load capacity shelf: 50 kg\*\*



### Shelf trolley | with 3 mesh shelves



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-540.225 / AG	1510 x 550 x 1535	59.5	1355 x 550	250	160 x 40
sw-640.225 / AG	1805 x 650 x 1575	66.0	1650 x 650	400	200 x 40

Load capacity shelf: 50 kg\*\*



Shelves for  
insertion diagonally  
or horizontal

### Shelf trolley | with 4 mesh shelves



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-540.212 / AG	1510 x 550 x 1815	71.0	1355 x 550	250	160 x 40
sw-640.212 / AG	1805 x 650 x 1855	79.0	1650 x 650	400	200 x 40

Load capacity shelf: 50 kg\*\*



### ADDITIONAL ARTICLES Mesh shelves for shelf trolleys

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	For loading surface W x D (mm)	Load cap. kg
zsw-540.212 / AG	1320 x 535	9.5	1355 x 550	50
zsw-640.212 / AG	1615 x 635	10.5	1650 x 650	50



\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: atamax@atamax.hu



# 46 SHELF TROLLEYS



GALVANISED

Galvanised  
Tilting shelves with edge  
Shelves of mesh  
Variable insertion

System trolleys

## CONSTRUCTION

- Modular system
- Base structure with innovative frame section
- Fixed welded tubular push bar

## FEATURES

- Load surfaces with mesh size 50 x 50 mm
- For sloping or horizontal insertion, shelf support interval 120 mm

- Gradient when sloping 15 degrees
- 15 mm high edge on the long side

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Galvanised



Shelf trolley | with 2 mesh shelves | galvanized

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-540.224	1510 x 550 x 1235	47.0	1355 x 550	250	160 x 40
sw-640.224	1805 x 650 x 1275	56.5	1650 x 650	400	200 x 40


Load capacity shelf: 50 kg\*\*



Shelf trolley | with 3 mesh shelves | galvanized

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-540.226	1510 x 550 x 1535	59.5	1355 x 550	250	160 x 40
sw-640.226	1805 x 650 x 1575	66.0	1650 x 650	400	200 x 40

Load capacity shelf: 50 kg\*\*

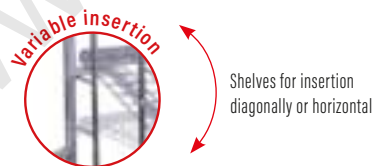

Shelf trolley | with 4 mesh shelves | galvanized

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-540.218	1510 x 550 x 1815	71.0	1355 x 550	250	160 x 40
sw-640.218	1805 x 650 x 1855	79.0	1650 x 650	400	200 x 40

Load capacity shelf: 50 kg\*\*



## ADDITIONAL ARTICLES Galvanised mesh shelves for shelf trolley

Article-no.	Dimension W x D x H (mm)	Weight kg	For loading surface W x D (mm)	Load cap. kg
zsw-540.218	1320 x 535	9.5	1355 x 550	50
zsw-640.218	1615 x 635	10.5	1650 x 650	50

**RAL 5010** **RAL 7016**

## CONSTRUCTION

- Welded steel construction
- Screwed



## FEATURES

- Tilts to 17° or 32° by bolting
- Open shelves with 27 mm high edge
- Clearance between cross tubes: 125 mm
- Hole spacing for screwing shelves: 150 mm
- Suitable for euro size container 600 x 400 mm (W x D)

## FITTINGS

- 4 swivel castors, 2 of them with brakes
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Open shelves with edge  
Tilting shelves  
Two tilt angles



Suitable plastic crates on page 48

## Euro container trolley

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
<b>sw-610.100 / AG</b>	520 x 665 x 1125	33.5	410 x 610	200	125 x 30

Load capacity shelf: 50 kg\*\*

Suitable plastic crates on page 48

## Euro container trolley

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
<b>sw-610.200 / AG</b>	935 x 665 x 1125	38.5	825 x 610	200	125 x 30

Load capacity shelf: 50 kg\*\*



Suitable plastic crates on page 48

## Euro container trolley

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
<b>sw-610.300 / AG</b>	1350 x 665 x 1700	69.5	1240 x 610	250	160 x 40

Load capacity shelf: 50 kg\*\*



System trolleys

\*\*Static distributed load; Total load of the transport device must not be exceeded!

# 48 EURO CONTAINER TROLLEYS

RAL 5010 RAL 7016

Open shelves with plastic crates and edge  
Tilting shelves  
Two tilt angles

System trolleys



## CONSTRUCTION

- Welded steel construction
- Screwed

## FEATURES

- Tilts to 17° or 32° by bolting
- Open shelves with 27 mm high edge and plastic crates
- Clearance between cross tubes: 125 mm
- Hole spacing for screwing shelves: 150 mm
- Suitable for euro size container 600 x 400 mm (W x D)

## FITTINGS

- 4 swivel castors, 2 of them with brakes
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



Incl. euro size container  
600 x 400 x 170 mm (W x D x H)

### Euro container trolley | with 3 plastic crates

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-610.102 / AG	520 x 665 x 1160	38.5	410 x 610	200	125 x 30

Load capacity shelf: 50 kg\*\*



Incl. euro size container  
600 x 400 x 170 mm (W x D x H)

### Euro container trolley | with 6 plastic crates

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-610.202 / AG	935 x 665 x 1160	47.5	825 x 610	200	125 x 30

Load capacity shelf: 50 kg\*\*



Incl. euro size container  
600 x 400 x 170 mm (W x D x H)

### Euro container trolley | with 15 plastic crates

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-610.302 / AG	1350 x 665 x 1785	92.0	1240 x 610	250	160 x 40

Load capacity shelf: 50 kg\*\*



## ADDITIONAL ARTICLES Plastic crates

Article-no.	Dimension W x D x H (mm)	Weight kg	Volume l
fk-040.004	600 x 400 x 170	1.5	35
fk-040.000	600 x 400 x 220	3.3	45

\*\*Static distributed load; Total load of the transport device must not be exceeded!

RAL 5010 RAL 7016

## CONSTRUCTION

- Welded steel construction
- Screwed

## FEATURES

- Tilts to 17° or 32° by bolting
- Load surfaces of wood-based board, surface finish beech or coated dark grey
- Shelves with edge 15 mm high
- Clearance between cross tubes: 125 mm
- Hole spacing for screwing shelves: 150 mm
- Suitable for euro size container 600 x 400 mm (W x D)

## FITTINGS

- 4 swivel castors, 2 of them with brakes
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Wooden shelves with edge  
Tilting shelves  
Two tilt angles



System trolleys

### Euro container trolley | with 3 wooden shelves

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-610.101 / AG	520 x 665 x 1125	40.5	410 x 610	200	125 x 30

Load capacity shelf: 50 kg\*\*



### Euro container trolley | with 3 wooden shelves

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-610.201 / AG	935 x 665 x 1125	52.5	825 x 610	200	125 x 30

Load capacity shelf: 50 kg\*\*



### Euro container trolley | with 5 wooden shelves

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-610.301 / AG	1350 x 665 x 1700	103.0	1240 x 610	250	160 x 40

Load capacity shelf: 50 kg\*\*



Also available in ESD design on page 70

\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: atamax@atamax.hu

# 50 SMALL ORDER-PICKING TROLLEYS



RAL 5010

RAL 7016

Open shelves or with plastic crates  
or wooden shelves with edge  
Fixed shelves

System trolleys



## CONSTRUCTION

- Welded steel construction

## FEATURES

- Open shelves or with 3 plastic crates (600 x 400 x 220 mm (W x D x H) / 45 l), or of wood-based board, surface finish beech or coated dark grey (edge 10 mm high)
- Suitable for euro size container 600 x 400 mm (W x D)
- Middle and upper shelf fixed

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



Suitable plastic crates on page 48

### Small order-picking trolley

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-400.800 / AG	815 x 455 x 1185	21.0	610 x 410	200	125 x 30

Load capacity shelf: 50 kg\*\*




Incl. euro size container  
600 x 400 x 220 mm (W x D x H)

### Small order-picking trolley | with 3 plastic crates

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-400.804 / AG	815 x 455 x 1385	25.5	610 x 410	200	125 x 30

Load capacity shelf: 50 kg\*\*

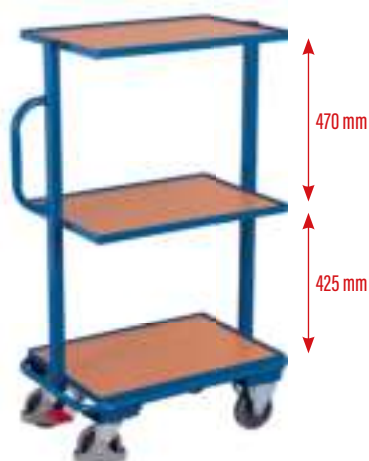

Suitable plastic crates on page 48

### Small order-picking trolley | with 3 wooden shelves

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-400.801 / AG	815 x 455 x 1185	26.0	610 x 410	200	125 x 30

Load capacity shelf: 50 kg\*\*



RAL 5010 RAL 7016

## CONSTRUCTION

- Welded steel construction

## FEATURES

- Open shelves or with 3 plastic crates (600 x 400 x 220 mm (W x D x H) / 45 l), or of wood-based board, surface finish beech or coated dark grey (edge 10 mm high)
- Suitable for euro size container 600 x 400 mm (W x D)
- Middle and upper shelf tilts to 15° or 30°

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Open shelves or with plastic crates  
or wooden shelves with edge  
Tilting shelves  
Two tilt angles



System trolleys

Suitable plastic crates on page 48

### Small order-picking trolley | tiltable



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-400.802 / AG	815 x 455 x 1185	22.0	610 x 410	200	125 x 30

Load capacity shelf: 50 kg\*\*

Incl. euro size container  
600 x 400 x 220 mm (W x D x H)

### Small order-picking trolley | with 3 plastic crates | tiltable



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-400.805 / AG	815 x 455 x 1385	28.5	610 x 410	200	125 x 30

Load capacity shelf: 50 kg\*\*



Suitable plastic crates on page 48

### Small order-picking trolley | with 3 wooden shelves | tiltable



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-400.803 / AG	815 x 455 x 1185	29.5	610 x 410	200	125 x 30

Also available in ESD design on page 70

Load capacity shelf: 50 kg\*\*



\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: atamax@atamax.hu

Height adjustable  
Fixed or one-sided tiltable  
Edge on one side or all sides

System trolleys



### CONSTRUCTION

- Welded steel construction

### FEATURES

- Load surface with edge on one side (22 mm high) or edge on all sides (18 mm high)
- Height adjustable in steps of 25 mm
- Fixed or tilting on one side to 15° or 30°, secure positioning by spring catch
- Suitable for euro size container 600 x 400 mm (W x D)

### FITTINGS

- 4 swivel castors, 2 of them with brakes
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Suitable plastic crates on page 48

### Material stand

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-405.000 / AG	610 x 410 x 770-1020	16.0	605 x 405	150	75 x 25

Also available in ESD design on page 71



Height adjustable in steps of 25 mm

Suitable plastic crates on page 48

### Material stand

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-405.001 / AG	610 x 410 x 535-810	14.5	605 x 405	150	75 x 25

Also available in ESD design on page 71



**BEST-SELLER**

### Material stand | one-sided tiltable

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-405.002 / AG	600 x 410 x 715-1085	15.0	510 x 410	150	75 x 25

Also available in ESD design on page 71



### Material stand | one-sided tiltable

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-405.005 / AG	600 x 410 x 520-775	13.5	510 x 410	150	75 x 25

Also available in ESD design on page 71



RAL 5010 RAL 7016

## CONSTRUCTION

- Welded steel construction
- Platform bolted to frame, permitting variable extension with other types of platform

## FEATURES

- Load surface with edge on one side (22 mm high)
- One-sided tiltable to 15° or 30°
- Zero-play adjustable telescopic system, self-locking
- Continuously adjustable by hand crank, height adjustment range 660 - 1035 mm
- Platform height adjustable even under full load

## FITTINGS

- 4 swivel castors, 2 of them with brakes
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Infinitely height adjustable with hand crank  
Tiltable  
Edge on one side



System trolleys



Material stand | with hand crank

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-405.012 / AG	600 x 415 x 680-1055	19.0	510 x 410	150	75 x 25



# 54 CUSTOMIZING

IN COMPARISON



Our custom-made products in comparison

## INDIVIDUALLY

- Opportunities for modification in line with customers' individual wishes

## UNIQUE PIECE

- Deliveries of small series from one piece upwards
- Product approval drawings
- Fair prices even for small quantities

## CUSTOMER FOCUSED

- Analysing parameters such as uses, handling, workflows and much more in close cooperation with the customer

## TAILORED

- Products in special sizes, special colours and complete new designs



# The best solution for every task



Customizing

RAL 5010 RAL 7016

## CONSTRUCTION

- Welded steel construction

## FEATURES

- Open load surface or of wood-based board, surface finish beech or coated dark grey or with ribbed rubber covering or with diamond-tread

## FITTINGS

- 4 swivel castors, 2 of them with brakes
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Open load surface or of wood-based board or with ribbed rubber covering or with diamond-tread



System trolleys

### Crate dolly



Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-500.010 / AG	500 x 500 x 170	8.5	500 x 500	400	125 x 30



### Crate dolly | with board load surface



Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-500.011 / AG	500 x 500 x 185	11.5	500 x 500	400	125 x 30



### Crate dolly | with ribbed rubber covering



Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-500.013 / AG	500 x 500 x 185	12.0	500 x 500	400	125 x 30



### Crate dolly | with diamond-tread load surface



Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-500.012 / AG	500 x 500 x 170	12.0	500 x 500	400	125 x 30



With or without load surface  
Board flush with frame or with edge  
Suitable for euro size container



AG

System trolleys

## CONSTRUCTION

- Welded angle-steel construction

## FEATURES

- Versions without or with load surface of wood-based board, surface finish beech or coated dark grey
- Flush with frame or edge 10 mm high
- Suitable for euro size container 600 x 400 mm (W x D)

## FITTINGS

- 4 swivel castors, 2 of them with brakes
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



Suitable plastic crates on page 48

### Euro system dolly

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.003 / AG	610 x 415 x 205	8.5	605 x 410	250	125 x 30



Shown with euro size container  
600 x 400 x 170 mm (W x D x H)  
Suitable plastic crates on page 48

### Euro system dolly | with board (edge 10 mm)

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.010 / AG	610 x 415 x 205	10.0	605 x 410	250	125 x 30



Suitable plastic crates on page 48

### Euro system dolly | with board

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.009 / AG	610 x 415 x 205	10.0	610 x 415	250	125 x 30



RAL 5010 RAL 7016

## CONSTRUCTION

- Welded angle-steel construction

## FEATURES


- Versions without or with load surface of wood-based board, surface finish beech or coated dark grey
- Flush with frame or edge 10 mm high
- Suitable for euro size container 600 x 400 mm (W x D)

## FITTINGS

- 4 swivel castors, 2 of them with **EasySTOP**
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

With or without load surface  
Board flush with frame or with edge  
Suitable for euro size container

**EasySTOP**



Suitable plastic crates on page 48

### Euro system dolly



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.063 / AG	610 x 415 x 235	9.5	605 x 410	250	125 x 30



Suitable plastic crates on page 48

### Euro system dolly | with board (edge 10 mm)



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.070 / AG	610 x 415 x 235	11.0	605 x 410	250	125 x 30



Suitable plastic crates on page 48

### Euro system dolly | with board



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.069 / AG	610 x 415 x 235	11.0	610 x 415	250	125 x 30



System trolleys

# 58 EURO SYSTEM DOLLIES

RAL 5010 RAL 7016

With or without load surface  
Board flush with frame or with edge  
Suitable for euro size container  
With sockets



System trolleys

## CONSTRUCTION

- Welded angle-steel construction

## FEATURES

- Versions without or with load surface of wood-based board, surface finish beech or coated dark grey
- Flush with frame or edge 10 mm high
- Suitable for euro size container 600 x 400 mm (W x D)
- 4 sockets

## FITTINGS

- 4 swivel castors, 2 of them with brakes
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



Suitable plastic crates on page 48

### Euro system dolly | with sockets

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.000 / AG	675 x 415 x 205	9.0	605 x 410	250	125 x 30



Suitable plastic crates on page 48

### Euro system dolly | with board (edge 10 mm) and sockets

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.001 / AG	675 x 415 x 205	10.5	605 x 410	250	125 x 30



Suitable plastic crates on page 48

### Euro system dolly | with board and sockets

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.002 / AG	675 x 415 x 205	10.5	610 x 415	250	125 x 30



RAL 5010 RAL 7016

## CONSTRUCTION

- Welded angle-steel construction

## FEATURES


- Versions without or with load surface of wood-based board, surface finish beech or coated dark grey
- Flush with frame or edge 10 mm high
- Suitable for euro size container 600 x 400 mm (W x D)
- 4 sockets

## FITTINGS

- 4 swivel castors, 2 of them with **EasySTOP**
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

With or without load surface  
Board flush with frame or with edge  
Suitable for euro size container

**EasySTOP**



System trolleys

Suitable plastic crates on page 48

Euro system dolly with sockets



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.060 / AG	675 x 415 x 235	10.0	605 x 410	250	125 x 30



Suitable plastic crates on page 48

Euro system dolly with board (edge 10 mm) and sockets



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.061 / AG	675 x 415 x 235	11.5	605 x 410	250	125 x 30



Suitable plastic crates on page 48

Euro system dolly with board and sockets



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.062 / AG	675 x 415 x 235	11.5	610 x 415	250	125 x 30



Load surfaces with edge  
Suitable for euro size container  
With sockets

System trolleys



## CONSTRUCTION

- Welded angle-steel construction

## FEATURES

- Load surfaces of wood-based board, surface finish beech or coated dark grey
- Load surfaces with edge 10 mm high
- Suitable for euro size container 600 x 400 mm (W x D)
- 4 sockets

## FITTINGS

- 4 swivel castors, 2 of them with brakes
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



Suitable plastic crates on page 48

### Euro system dolly | with board (edge 10 mm) and push bar

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.011 / AG	740 x 415 x 970	13.5	605 x 410	250	125 x 30



Suitable plastic crates on page 48

### Euro system dolly | with 2 load surfaces (edge 10 mm)

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.500 / AG	675 x 415 x 635	19.0	605 x 410	250	125 x 30

Also available in ESD design on page 72

Load capacity shelf: 80 kg\*\*



Suitable plastic crates on page 48

### Euro system dolly | with 2 load surfaces (edge 10 mm) and push bar

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.526 / AG	770 x 415 x 950	20.0	605 x 410	250	125 x 30

Load capacity shelf: 80 kg\*\*

RAL 5010 RAL 7016

## CONSTRUCTION

- Welded angle-steel construction

## FEATURES

- Load surfaces of wood-based board, surface finish beech or coated dark grey
- Load surfaces flush with frame
- Suitable for euro size container 600 x 400 mm (W x D)
- 4 sockets

## FITTINGS

- 4 swivel castors, 2 of them with brakes
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Load surfaces flush with frame  
Suitable for euro size container  
With sockets



System trolleys

Suitable plastic crates on page 48

### Euro system dolly | with board and push bar



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.039 / AG	740 x 415 x 970	14.0	610 x 415	250	125 x 30



Suitable plastic crates on page 48

### Euro system dolly | with 2 load surfaces



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.501 / AG	675 x 415 x 635	19.0	610 x 415	250	125 x 30

Also available in ESD design on page 72

Load capacity shelf: 80 kg\*\*



**NEW**

Suitable plastic crates on page 48

### Euro system dolly | with 2 load surfaces and push bar



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.551 / AG	770 x 415 x 950	20.0	610 x 415	250	125 x 30

Load capacity shelf: 80 kg\*\*



\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: atamax@atamax.hu





RAL 5010

RAL 7016

Load surfaces with edge  
Suitable for euro size container  
With sockets  
**EasySTOP**

System trolleys



## CONSTRUCTION

- Welded angle-steel construction

## FEATURES

- Load surfaces of wood-based board, surface finish beech or coated dark grey
- Load surfaces with edge 10 mm high
- Suitable for euro size container 600 x 400 mm (W x D)
- 4 sockets

## FITTINGS

- 4 swivel castors, 2 of them with **EasySTOP**
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



Suitable plastic crates on page 48



### Euro system dolly | with board (edge 10 mm) and push bar

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.071 / AG	740 x 415 x 1000	14.5	605 x 410	250	125 x 30



410 mm

Shown with euro size container  
600 x 400 x 170 mm (W x D x H)  
Suitable plastic crates on page 48

### Euro system dolly | with 2 load surfaces (edge 10 mm)

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.540 / AG	675 x 415 x 665	20.0	605 x 410	250	125 x 30

Also available in ESD design on page 72

Load capacity shelf: 80 kg\*\*



410 mm



Suitable plastic crates on page 48

### Euro system dolly | with 2 load surfaces (edge 10 mm) and push bar

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.552 / AG	770 x 415 x 990	21.0	605 x 410	250	125 x 30

Load capacity shelf: 80 kg\*\*



RAL 5010 RAL 7016

## CONSTRUCTION

- Welded angle-steel construction

## FEATURES

- Load surfaces of wood-based board, surface finish beech or coated dark grey
- Load surfaces flush with frame
- Suitable for euro size container 600 x 400 mm (W x D)
- 4 sockets

## FITTINGS


- 4 swivel castors, 2 of them with **EasySTOP**
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Load surfaces flush with frame

Suitable for euro size container

With sockets

**EasySTOP**



System trolleys

Suitable plastic crates on page 48

### Euro system dolly | with board and push bar



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.079 / AG	740 x 415 x 1000	14.5	610 x 415	250	125 x 30



Suitable plastic crates on page 48

### Euro system dolly | with 2 load surfaces



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.541 / AG	675 x 415 x 665	20.0	610 x 415	250	125 x 30

Also available in ESD design on page 72

Load capacity shelf: 80 kg\*\*



**NEW**

Suitable plastic crates on page 48

### Euro system dolly | with 2 load surfaces and push bar



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.553 / AG	770 x 415 x 990	21.0	610 x 415	250	125 x 30

Load capacity shelf: 80 kg\*\*



\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: atamax@atamax.hu

**VARIOfit**

# 64 PUSH-HANDLE DOLLIES

RAL 5010 RAL 7016

Screw-on handle  
Open load surface or tubular steel load surface  
Suitable for euro size container



System trolleys



## CONSTRUCTION

- Welded steel construction

## FEATURES

- Open load surface or tubular steel load surface
- Open load surface suitable for euro size container 600 x 400 mm (W x D)
- Screw-on handle

## FITTINGS

- 1 or 2 swivel castors with brakes, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Suitable plastic crates on page 48

### Push-handle dolly

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-450.807 / AG	890 x 420 x 875	11.0	615 x 415	250	125 x 30

Incl. euro size container  
600 x 400 x 220 mm (W x D x H)

### Push-handle dolly with plastic crate

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-450.806 / AG	890 x 420 x 875	13.0	615 x 415	250	125 x 30

### Push-handle dolly with tubular steel load surface

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-450.805 / AG	785 x 450 x 875	8.5	565 x 450	150	125 x 30

### Push-handle dolly with tubular steel load surface

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.801 / AG	880 x 500 x 880	9.5	605 x 500	250	125 x 30

RAL 5010 RAL 7016

## CONSTRUCTION

- Welded steel construction

## FEATURES

- Load surfaces of wood based-board, surface finish beech or coated dark grey
- Load surfaces flush with frame
- Screw-on handle

## FITTINGS

- 1 or 2 swivel castors with brakes, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Screw-on handle  
Load surfaces of wood-based board



System trolleys

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-450.804 / AG	785 x 450 x 875	9.5	565 x 450	150	125 x 30

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.800 / AG	880 x 500 x 880	11.0	605 x 500	250	125 x 30



RAL 5010 RAL 7016

## FEATURES

- 2 load surfaces of wood based-board, surface finish beech or coated dark grey

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors



## PUSH-HANDLE DOLLY WITH 2 LOAD SURFACES

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-450.800 / AG	940 x 455 x 910	16.0	610 x 455	250	125 x 30



Also available in ESD design on page 70

Load capacity shelf: 100 kg\*\*

\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: atamax@atamax.hu

# 66 ESD TROLLEYS

ELECTROSTATIC DISCHARGE

Electrostatic discharge



ESD

## PROBLEM

Moving over various ground materials can cause electrostatic charging of the user and the transport equipment.

## DANGER

Delicate goods and goods from the electronics segment can be damaged or even completely destroyed by electrostatic charges and the resulting discharges.

## SOLUTION

The **VARIOfit**® ESD transport devices therefore ensure that, due to their electrically conductive construction, the load surfaces of conductive decorative chipboard in light grey and the ESD powder coating in RAL 7024 graphite grey, especially those goods are protected from e.g. overvoltage damage according to EN 61340.



**VARIOfit**®  
ESD TROLLEYS

**VARIOfit**

Ajánlatkérés: [atamax@atamax.hu](mailto:atamax@atamax.hu)



## CONSTRUCTION

- Fixed welded angle-steel construction
- End and side walls, roof and doors with mesh sides 50 x 50 mm

## FEATURES

- Load surface and shelves of electrically conductive faced chipboard light grey
- Shelves inserted in angle-steel frame, shelf supports for variable insertion at 50 mm intervals
- Double wing door with espagnolette bolt lock and T-handle

- Cylinder lock, incl. 2 keys (different locking)
- Push/pull bar with soft plastic grip cover

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking electrically conductive thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in RAL 7024 graphite grey, electrically conductive, powder-coated

Electrostatic discharge  
Walls, roof and doors with mesh  
Optionally with double wing door, lockable  
**EasySTOP**

### ESD shelf trolley | fixed welded

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.860	1115 x 730 x 1810	103.5	1045 x 685	500	200 x 40
sw-800.860	1315 x 830 x 1810	120.5	1245 x 785	500	200 x 40

Load capacity shelf: 80 kg\*\*



Rests against the cross tube when pushed, for safe and comfortable pushing

Flush with the frame when not in use

Can be opened 270° and is flush with the frame

### ESD shelf trolley | fixed welded

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.867	1115 x 730 x 1810	117.5	1045 x 685	500	200 x 40
sw-800.867	1315 x 830 x 1810	140.0	1245 x 785	500	200 x 40

Load capacity shelf: 80 kg\*\*



### ADDITIONAL ARTICLES ESD shelves of plywood for shelf trolleys

Article-no.	Dimension W x D x H (mm)	Weight kg	For loading surface W x D (mm)	Load cap. kg
zsw-700.421	1030 x 660	11.5	1045 x 685	80
zsw-800.421	1230 x 760	16.0	1245 x 785	80



\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: [atamax@atamax.hu](mailto:atamax@atamax.hu)



RAL 7024

Electrostatic discharge  
Walls, roof and doors of galvanised steel sheet  
Optionally with double wing door, lockable  
**EasySTOP**

ESD



## CONSTRUCTION

- Fixed welded angle-steel construction
- End and side walls, roof and door of galvanised steel sheet

## FEATURES

- Load surface and shelves of electrically conductive faced chipboard light grey
- Shelves inserted in angle steel frame, shelf supports for variable insertion at 100 mm intervals
- Double wing door with espagnolette bolt lock and T-handle

- Cylinder lock, incl. 2 keys (different locking)
- Push/pull bar with soft plastic grip cover

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking electrically conductive thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in RAL 7024 graphite grey, electrically conductive, powder-coated


### ESD shelf trolley | fixed welded

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.872	1115 x 730 x 1810	123.0	1045 x 685	500	200 x 40
sw-800.872	1315 x 830 x 1810	153.0	1245 x 785	500	200 x 40

Load capacity shelf: 80 kg\*\*



T-handle lock



Push/pull bar



Double wing door

Adjusts to the height of the person pulling when the trolley is being pulled and is flush with the frame when not in use

Can be opened 270° and is flush with the frame

### ESD shelf trolley | fixed welded

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.868	1115 x 730 x 1810	138.0	1045 x 685	500	200 x 40
sw-800.868	1315 x 830 x 1810	171.5	1245 x 785	500	200 x 40

Load capacity shelf: 80 kg\*\*

### ADDITIONAL ARTICLES ESD shelves of plywood for shelf trolleys

Article-no.	Dimension W x D x H (mm)	Weight kg	For loading surface W x D (mm)	Load cap. kg
zsw-700.422	1000 x 660	11.5	1045 x 685	80
zsw-800.422	1200 x 760	16.0	1245 x 785	80



## CONSTRUCTION

- Modular system
- Base structure of innovative frame section

## FEATURES

- Load surface and shelves of electrically conductive faced chipboard light grey
- Flush inserted in angle-steel frame
- Shelves replaceable and variable removable

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking electrically conductive thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in RAL 7024 graphite grey, electrically conductive, powder-coated

Electrostatic discharge  
Shelves flush with the frame  
Replaceable and removable  
**EasySTOP**

### ESD shelf trolley | low

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.257	910 x 500 x 990	41.5	850 x 500	250	160 x 40
sw-600.257	1060 x 600 x 990	52.0	1000 x 600	250	160 x 40
sw-700.257	1060 x 700 x 990	56.5	1000 x 700	250	160 x 40
sw-800.257	1260 x 800 x 990	62.5	1200 x 800	250	160 x 40

Load capacity shelf: 80 kg\*\*



### ESD shelf trolley | high

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.258	910 x 500 x 1530	45.5	850 x 500	250	160 x 40
sw-600.258	1060 x 600 x 1530	56.0	1000 x 600	250	160 x 40
sw-700.258	1060 x 700 x 1530	61.5	1000 x 700	250	160 x 40
sw-800.258	1260 x 800 x 1530	67.0	1200 x 800	250	160 x 40

Load capacity shelf: 80 kg\*\*

### ESD shelf trolley | high

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.259	910 x 500 x 1530	54.0	850 x 500	250	160 x 40
sw-600.259	1060 x 600 x 1530	72.5	1000 x 600	250	160 x 40
sw-700.259	1060 x 700 x 1530	81.0	1000 x 700	250	160 x 40
sw-800.259	1260 x 800 x 1530	107.0	1200 x 800	250	160 x 40

Load capacity shelf: 80 kg\*\*

### ADDITIONAL ARTICLES Shelves for ESD shelf trolleys

Article-no.	Dimension W x D x H (mm)	Weight kg	For loading surface W x D (mm)	Load cap. kg
zsw-500.557	845 x 485	5.5	850 x 500	80
zsw-600.557	995 x 585	7.5	1000 x 600	80
zsw-700.557	995 x 685	9.0	1000 x 700	80
zsw-800.557	1195 x 785	12.5	1200 x 800	80



ESD

\*\*Static distributed load; Total load of the transport device must not be exceeded!



# 70 ESD EURO CONTAINER TROLLEY



RAL 7024

Electrostatic discharge  
Tilting shelves

ESD



## CONSTRUCTION

- Welded steel construction
- screwed

## FEATURES

- Tilts to 17° or 32° by bolting
- Load surfaces of electrically conductive faced chipboard light grey (15 mm high edge)
- Clearance between cross tubes: 125 mm
- Hole spacing for screwing shelves: 150 mm

- Suitable for euro size container 600 x 400 mm (W x D)

## FITTINGS

- 4 swivel castors, 2 of them with brakes
- Grey non-marking electrically conductive thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in RAL 7024 graphite grey, electrically conductive, powder-coated

### ESD euro container trolley | with 5 ESD shelves

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-610.315	1350 x 665 x 1700	103.0	1240 x 610	250	160 x 40

Load capacity shelf: 50 kg\*\*

## ESD SMALL ORDER-PICKING TROLLEY



RAL 7024



## FEATURES

- Load surfaces with 10 mm high edge
- Middle and upper shelf tilts to 15° or 30°

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors

### ESD small order-picking trolley | with 3 ESD shelves, tiltable

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-400.844	815 x 455 x 1185	29.5	610 x 410	200	125 x 32

Load capacity shelf: 50 kg\*\*



Tiltable to 15° oder 30°

## ESD PUSH-HANDLE DOLLY



RAL 7024



## FEATURES

- Load surfaces flush with frame
- Screw-on handle

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors

### ESD push-handle dolly | with 2 load surfaces

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-450.832	940 x 455 x 910	17.0	610 x 455	200	125 x 32

Load capacity shelf: 100 kg\*\*



RAL 7024

## CONSTRUCTION

- Welded steel construction

## FEATURES

- Load surface with edge on one side (22 mm high) or edge on all sides (18 mm high)
- Height adjustable in steps of 25 mm
- Fixed or tilting on one side to 15° or 30°, secure positioning by spring catch
- Suitable for euro size container 600 x 400 mm (W x D)


## FITTINGS

- 4 swivel castors, 2 of them with brakes
- Grey non-marking electrically conductive thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in RAL 7024 graphite grey, electrically conductive, powder-coated

Electrostatic discharge  
Height adjustable  
Fixed or one-sided tiltable

### ESD material stand

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-405.040	610 x 410 x 770-1020	16.0	605 x 405	150	80 x 25



Height adjustable in steps of 25 mm

### ESD material stand

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-405.041	610 x 410 x 535-810	14.5	605 x 405	150	80 x 25

### ESD material stand | one-sided tiltable

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-405.042	600 x 410 x 715-1085	15.0	510 x 410	150	80 x 25



One-sided tiltable to 15° or 30°

### ESD material stand | one-sided tiltable

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-405.045	600 x 410 x 520-775	13.5	510 x 410	150	80 x 25



ESD



Electrostatic discharge

**EasySTOP**

ESD



## CONSTRUCTION

- Modular system
- Base structure with innovative frame section

## FEATURES

- Load surface of electrically conductive faced chipboard light grey

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking electrically conductive thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in RAL 7024 graphite grey, electrically conductive, powder-coated

## ESD push bar trolley

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.141	975 x 500 x 975	25.0	880 x 500	400	160 x 40
sw-600.141	1125 x 600 x 1015	29.5	1030 x 600	500	200 x 40
sw-700.141	1125 x 700 x 1015	33.5	1030 x 700	500	200 x 40
sw-800.141	1325 x 800 x 1015	37.0	1230 x 800	500	200 x 40

## ESD EURO SYSTEM DOLLY



410 mm



## CONSTRUCTION

- Modular system
- Welded angle-steel construction

## FEATURES

- Load surfaces of electrically conductive faced chipboard light grey
- Load surfaces flush with frame or with edge 10 mm high
- Suitable for Euro size container 600 x 400 mm (W x D)
- 4 sockets

## FITTINGS

- 4 swivel castors, 2 of them with **EasySTOP** or 4 swivel castors, 2 of them with brakes
- Grey non-marking electrically conductive thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in RAL 7024 graphite grey, electrically conductive, powder-coated

## ESD euro system dolly with **EasySTOP** and 2 load surfaces (edge 10 mm)

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.556	675 x 415 x 665	20.0	605 x 410	250	125 x 32

Load capacity shelf: 80 kg\*\*

## ESD euro system dolly with 2 load surfaces (edge 10 mm)

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.516	675 x 415 x 635	19.0	605 x 410	250	125 x 32

Load capacity shelf: 80 kg\*\*

## ESD euro system dolly with **EasySTOP** and 2 load surfaces

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.546	675 x 415 x 665	20.0	610 x 415	250	125 x 32

Load capacity shelf: 80 kg\*\*

## ESD euro system dolly with 2 load surfaces

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-410.536	675 x 415 x 635	19.0	610 x 415	250	125 x 32

Load capacity shelf: 80 kg\*\*



RAL 7024

## CONSTRUCTION

- Modular system
- Base structure of innovative frame section
- Floors set in angle-steel frame

## FEATURES

- Load surfaces of electrically conductive faced chipboard light grey
- Load surfaces with 15 mm high edge
- Optionally 2 lockable drawers, extractable until 70% , with sliding runners and cylinder lock

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking electrically conductive thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in RAL 7024 graphite grey, electrically conductive, powder-coated

Electrostatic discharge  
2 or 3 load surfaces with edge  
Optionally with drawers  
**EasySTOP**

### ESD table trolley with 2 load surfaces



Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.557	975 x 525 x 1010	29.5	835 x 495	250	125 x 32
sw-600.557	1125 x 625 x 1010	35.0	985 x 595	250	125 x 32

Load capacity shelf: 80 kg\*\*



ESD

### ESD table trolley with 3 load surfaces



Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.657	975 x 525 x 1010	38.0	835 x 495	250	125 x 32
sw-600.657	1125 x 625 x 1010	46.0	985 x 595	250	125 x 32

Load capacity shelf: 80 kg\*\*



Inside dimensions of the drawers: W: 400 x D: 450 x H: 80 mm (2x)  
Load capacity per drawer: 25 kg  
Drawer divider set on page 80

### ESD table trolley with 2 load surfaces and 2 drawers



Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.939	1175 x 625 x 850	46.0	985 x 590	250	125 x 32

Load capacity shelf: 80 kg\*\*



Inside dimensions of the drawers: W: 400 x D: 450 x H: 80 mm (2x)  
Load capacity per drawer: 25 kg  
Drawer divider set on page 80

### ESD table trolley with 2 load surfaces and 2 drawers



Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.959	1125 x 625 x 1010	46.0	985 x 590	250	125 x 32

Load capacity shelf: 80 kg\*\*



\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: [atamax@atamax.hu](mailto:atamax@atamax.hu)

# 74 ESD HEAVY-DUTY TABLE TROLLEYS



RAL 7024

Electrostatic discharge  
Load surfaces flush with frame  
**EasySTOP**

## CONSTRUCTION

- Modular system
- Base structure with innovative frame section

## FEATURES

- Load surfaces of electrically conductive faced chipboard light grey
- Load surfaces flush with frame

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking electrically conductive thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in RAL 7024 graphite grey, electrically conductive, powder-coated

ESD



ESD heavy-duty table trolley | with 2 load surfaces

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.562	1040 x 500 x 880	33.5	850 x 500	400	160 x 40
sw-600.562	1190 x 600 x 920	41.0	1000 x 600	500	200 x 40
sw-700.562	1190 x 700 x 920	48.5	1000 x 700	500	200 x 40
sw-800.562	1390 x 800 x 920	54.5	1200 x 800	500	200 x 40

Load capacity shelf: 200 kg\*\*



ESD heavy-duty table trolley | with 3 load surfaces

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.662	1040 x 500 x 880	44.5	850 x 500	400	160 x 40
sw-600.662	1190 x 600 x 920	53.5	1000 x 600	500	200 x 40
sw-700.662	1190 x 700 x 920	59.0	1000 x 700	500	200 x 40
sw-800.662	1390 x 800 x 920	70.0	1200 x 800	500	200 x 40

Load capacity shelf: 200 kg\*\*





## CONSTRUCTION

- Welded steel construction
- Base structure with innovative frame section
- Floors set in angle-steel frame

## FEATURES

- Load surfaces of electrically conductive faced chipboard light grey
- Load surfaces with 15 mm high edge
- Cupboard with 1 fixed and 2 variable cupboard shelves
- Drawers with sliding runners and cylinder lock

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking electrically conductive thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in RAL 7024 graphite grey, electrically conductive, powder-coated

Inside dimensions cupboard: W: 470 x D: 575 x H: 575 mm  
2 variable cupboard shelves  
Load capacity per cupboard shelf: 30 kg

### ESD workshop trolley | with 3 load surfaces

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.773	1125 x 625 x 1010	62.5	985 x 590	250	125 x 32

Load capacity shelf: 80 kg\*\*

Inside dimensions drawer: W: 390 x D: 535 x H: 95 mm (3x)  
W: 390 x D: 535 x H: 155 mm (1x)  
Load capacity per drawer: 25 kg  
Drawer divider set on page 80

### ESD workshop trolley | with 3 load surfaces

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.775	1125 x 625 x 1010	80.5	985 x 590	250	125 x 32

Load capacity shelf: 80 kg\*\*



## CONSTRUCTION

- Sheet steel construction

## FEATURES

- Working surface of 18 mm electrically conductive faced chipboard light grey
- Cupboards with 1 fixed and 2 variable cupboard shelves
- Drawers with sliding runners and cylinder lock

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking electrically conductive thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in RAL 7024 graphite grey, electrically conductive, powder-coated

Inside dimensions cupboard: W: 560 x D: 515 x H: 660 mm  
2 variable cupboard shelves  
Load capacity per cupboard shelf: 30 kg  
Inside dimensions drawer: W: 290 x D: 475 x H: 95 mm (6x)  
Load capacity per drawer: 25 kg  
Drawer divider set on page 81



Removable shelves for insertion at 30 mm intervals

### ESD workshop trolley | with 6 drawers

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-985.021	1110 x 600 x 960	86.0	1000 x 600	400	160 x 40

Load capacity shelf: 120 kg\*\*

Electrostatic discharge  
Load surfaces with edge  
Wing door and drawers lockable  
**EasySTOP**



## ESD WORKSHOP TROLLEY

Wing door and drawers lockable  
Trolleys with simultaneous locking  
**EasySTOP**



\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: [atamax@atamax.hu](mailto:atamax@atamax.hu)



Load surfaces with edge  
Wing doors lockable  
Trolleys with simultaneous locking  
**EasySTOP**



Workshop/Storage

## CONSTRUCTION

- Welded steel construction
- Base structure with innovative frame section
- Floors set in angle-steel frame

## FEATURES

- Load surfaces of wood-based board, surface finish beech or coated dark grey
- Load surfaces with 15 mm high edge
- Cupboard with 1 fixed and 1 or 2 variable cupboard shelves

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, trolley and front RAL 5010 gentian blue or RAL 7016 anthracite grey, body RAL 7035 light grey, powder-coated

Inside dimensions cupboard: W: 470 x D: 575 x H: 575 mm  
2 variable cupboard shelves  
Load capacity per cupboard shelf: 30 kg

### Workshop trolley | with 3 load surfaces

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.603 / AG	1125 x 625 x 1010	62.5	985 x 590	250	125 x 30

Also available in ESD design on page 75

Load capacity shelf: 80 kg\*\*



Inside dimensions cupboard: W: 470 x D: 575 x H: 575 mm (2x)  
2 variable cupboard shelves  
Load capacity per cupboard shelf: 30 kg

### Workshop trolley | with 1 load surface

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.604 / AG	1125 x 625 x 1010	76.0	985 x 590	250	125 x 30

Load capacity shelf: 80 kg\*\*



Inside dimensions cupboard: W: 890 x D: 575 x H: 575 mm  
1 variable cupboard shelf  
Load capacity per cupboard shelf: 30 kg

### Workshop trolley | with 1 load surface

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.640 / AG	1125 x 625 x 1010	67.5	985 x 590	250	125 x 30

Load capacity shelf: 80 kg\*\*



RAL 5010 RAL 7016

## CONSTRUCTION

- Welded steel construction
- Base structure with innovative frame section
- Floors set in angle-steel frame


## MERKMALE

- Load surfaces of wood-based board, surface finish beech or coated dark grey
- Load surfaces with 15 mm high edge
- Cupboard with 1 fixed and 2 variable cupboard shelves
- Drawers with sliding runners and cylinder lock

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, trolley and front RAL 5010 gentian blue or RAL 7016 anthracite grey, body RAL 7035 light grey, powder-coated

Load surfaces with edge  
Wing door and drawers lockable  
Trolleys with simultaneous locking  
**EasySTOP**



Inside dimensions drawer: W: 390 x D: 535 x H: 95 mm (3x)  
W: 390 x D: 535 x H: 155 mm (1x)  
Load capacity per drawer: 25 kg  
Drawer divider set on page 80

### Workshop trolley | with 3 load surfaces

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.605 / AG	1125 x 625 x 1010	80.5	985 x 590	250	125 x 30

Also available in ESD design on page 75

Load capacity shelf: 80 kg\*\*



Workshop/Storage

Inside dimensions drawer: W: 390 x D: 535 x H: 95 mm (3x)  
W: 390 x D: 535 x H: 155 mm (1x)  
Load capacity per drawer: 25 kg  
Drawer divider set on page 80  
Inside dimensions cupboard: W: 470 x D: 575 x H: 575 mm  
2 variable cupboard shelves  
Load capacity per cupboard shelf: 30 kg

### Workshop trolley | with 1 load surface

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.606 / AG	1125 x 625 x 1010	94.5	985 x 590	250	125 x 30

Load capacity shelf: 80 kg\*\*



Inside dimensions drawer: W: 390 x D: 535 x H: 95 mm (6x)  
W: 390 x D: 535 x H: 155 mm (2x)  
Load capacity per drawer: 25 kg  
Drawer divider set on page 80

### Workshop trolley | with 1 load surface

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.608 / AG	1125 x 625 x 1010	112.0	985 x 590	250	125 x 30

Load capacity shelf: 80 kg\*\*



\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: atamax@atamax.hu





RAL 5010

RAL 7016

Working surface with edge on three sides

Wing door and drawers lockable

Trolleys with simultaneous locking

**EasySTOP**



Workshop/Storage



## CONSTRUCTION

- Welded steel construction
- Base structure with innovative frame section
- Floors set in angle-steel frame

## FEATURES

- Working surface of beech finish plywood with 80 mm high edge
- Load surfaces of wood-based board, surface finish beech or coated dark grey
- Load surfaces with 15 mm high edge
- Cupboards with 1 fixed and 2 variable cupboard shelves
- Drawers with sliding runners and cylinder lock

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, trolley and front RAL 5010 gentian blue or RAL 7016 anthracite grey, body RAL 7035 light grey, powder-coated

Inside dimensions cupboard: W: 470 x D: 575 x H: 575 mm  
2 variable cupboard shelves  
Load capacity per cupboard shelf: 30 kg

### Workshop trolley | with 3 load surfaces

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.610 / AG	1220 x 640 x 955	68.5	1125 x 630	400	160 x 40

Load capacity shelf: 80 kg\*\*

Inside dimensions drawer: W: 400 x D: 450 x H: 80 mm  
Load capacity per drawer: 25 kg  
Drawer divider set on page 80

Inside dimensions cupboard: W: 470 x D: 575 x H: 575 mm  
2 variable cupboard shelves  
Load capacity per cupboard shelf: 30 kg

### Workshop trolley | with 2 load surfaces

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.611 / AG	1220 x 640 x 955	65.5	1125 x 630	400	160 x 40

Load capacity shelf: 80 kg\*\*

Inside dimensions drawer: W: 390 x D: 535 x H: 95 mm (3x)  
W: 390 x D: 535 x H: 155 mm (1x)  
Load capacity per drawer: 25 kg  
Drawer divider set on page 80

### Workshop trolley | with 3 load surfaces

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.612 / AG	1220 x 640 x 955	86.0	1125 x 630	400	160 x 40

Load capacity shelf: 80 kg\*\*

Inside dimensions drawer: W: 390 x D: 535 x H: 95 mm (3x)  
W: 390 x D: 535 x H: 155 mm (1x)  
Load capacity per drawer: 25 kg  
Drawer divider set on page 80

Inside dimensions cupboard: W: 470 x D: 575 x H: 575 mm  
2 variable cupboard shelves  
Load capacity per cupboard shelf: 30 kg

### Workshop trolley | with 1 load surface

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.613 / AG	1220 x 640 x 955	101.5	1125 x 630	400	160 x 40

Load capacity shelf: 80 kg\*\*



RAL 5010 RAL 7016

## CONSTRUCTION

- Welded steel construction
- Base structure with innovative frame section


## FEATURES

- Load surfaces of wood-based board, surface finish beech or coated dark grey
- Load surfaces flush with frame
- Cupboards with 1 fixed and 2 variable cupboard shelves
- Drawers with sliding runners and cylinder lock

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, trolley and front RAL 5010 gentian blue or RAL 7016 anthracite grey, body RAL 7035 light grey, powder-coated

Load surfaces flush with frame  
Wing door and drawers lockable  
**EasySTOP**



Inside dimensions drawer: W: 390 x D: 535 x H: 95 mm (3x)  
W: 390 x D: 535 x H: 155 mm (1x)  
Load capacity per drawer: 25 kg  
Drawer divider set on page 80

Workshop trolley | with 2 load surfaces



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.602 / AG	1190 x 600 x 930	82.5	1060 x 600	500	200 x 40

Load capacity shelf: 200 kg\*\*



Workshop/Storage

Inside dimensions cupboard: W: 470 x D: 575 x H: 575 mm  
2 variable cupboard shelves  
Load capacity per cupboard shelf: 30 kg

Workshop trolley | with 2 load surfaces



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.607 / AG	1190 x 600 x 930	64.0	1060 x 600	500	200 x 40

Load capacity shelf: 200 kg\*\*



RAL 5010 RAL 7016

## CONSTRUCTION

- Welded steel construction
- Base structure with innovative frame section

## MERKMALE

- Load surfaces of waterproof bonded plywood, surface finish screen printed, anti slip
- Load surfaces flush with frame
- Cupboard with 1 fixed and 2 variable cupboard shelves

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Elastic-solid rubber tyres on cast aluminium wheel rim with precision deepgroove ball bearings, black, with foot guard, wheels also available in grey
- Available in 2 colours, trolley and front RAL 5010 gentian blue or RAL 7016 anthracite grey, body RAL 7035 light grey, powder-coated

## HEAVY-DUTY WORKSHOP TROLLEY

Load surfaces flush with frame  
Waterproof bonded plywood  
Wing door lockable  
**EasySTOP**



Inside dimensions cupboard sw-700.620: W: 470 x D: 675 x H: 575 mm  
Inside dimensions cupboard sw-800.620: W: 570 x D: 775 x H: 575 mm  
Load capacity per cupboard shelf: 30 kg

Heavy-duty workshop trolley | with 2 load surfaces

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.620 / AG	1190 x 700 x 930	81.0	1060 x 700	1000	200 x 50
sw-800.620 / AG	1390 x 800 x 930	96.5	1260 x 800	1000	200 x 50

Load capacity shelf: 500 kg\*\*



\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: atamax@atamax.hu



RAL 5010 RAL 7016

Load surfaces flush with frame  
Wing door and drawers lockable  
Trolleys with simultaneous locking  
**EasySTOP**



Workshop/Storage

## CONSTRUCTION

- Welded steel construction
- Base structure with innovative frame section

## FEATURES

- Load surfaces of wood-based board, surface finish beech or coated dark grey
- Load surfaces flush with frame
- Cupboard with 1 fixed and 2 variable cupboard shelves
- Drawers with sliding runners and cylinder lock

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, trolley and front RAL 5010 gentian blue or RAL 7016 anthracite grey, body RAL 7035 light grey, powder-coated

Inside dimensions drawer: W: 390 x D: 535 x H: 95 mm (3x)  
W: 390 x D: 535 x H: 155 mm (1x)  
Load capacity per drawer: 25 kg  
Inside dimensions cupboard: W: 470 x D: 575 x H: 575 mm  
2 variable cupboard shelves  
Load capacity per cupboard shelf: 30 kg

Workshop trolley | with 1 load surface

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.698 / AG	1190 x 600 x 930	103.5	1060 x 600	500	200 x 40

Load capacity shelf: 200 kg\*\*



Inside dimensions drawer: W: 390 x D: 535 x H: 95 mm (6x)  
W: 390 x D: 535 x H: 155 mm (2x)  
Load capacity per drawer: 25 kg

Workshop trolley | with 1 load surface

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.619 / AG	1190 x 600 x 930	117.0	1060 x 600	500	200 x 40


Load capacity shelf: 200 kg\*\*



Made of galvanised sheet steel  
Pluggable  
4 longitudinal dividers, 12 dividing plates  
For products on pages: 22, 23, 73, 75, 77-80

## ADDITIONAL ARTICLE Drawer divider set

Article-no.	Dimension W x D x H (mm)	Weight kg
zsw-600.604	390 x 535 x 65	1.0

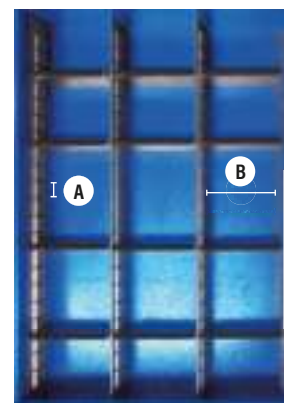

A: Division grid compartment height: 25 mm  
B: Compartment width: 120 mm



RAL 5010 RAL 7016

## CONSTRUCTION

- Welded steel construction

## FEATURES

- Working surface of beech finish plywood without edge
- Cupboard with 1 fixed and 2 variable cupboard shelves
- Removable shelves for insertion at 30 mm interval
- Drawers with sliding runners and cylinder lock

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, trolley and front RAL 5010 gentian blue or RAL 7016 anthracite grey, body RAL 7035 light grey, powder-coated

Working surface without edge  
Wing door and drawers lockable  
Trolleys with simultaneous locking  
**EasySTOP**



Inside dimensions cupboard: W: 560 x D: 515 x H: 660 mm  
2 variable cupboard shelves  
Load capacity per cupboard shelf: 30 kg  
Inside dimensions drawer: W: 290 x D: 475 x H: 95 mm (1x)  
W: 290 x D: 475 x H: 155 mm (2x)  
W: 290 x D: 475 x H: 130 mm (1x)  
Load capacity per drawer: 25 kg

Workshop trolley | with 4 drawers |

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-985.000 / AG	1100 x 600 x 960	83.5	1000 x 600	400	160 x 40

Load capacity shelf: 120 kg\*\*



Removable shelves for insertion at 30 mm interval

Inside dimensions cupboard: W: 560 x D: 515 x H: 660 mm  
2 variable cupboard shelves  
Load capacity per cupboard shelf: 30 kg  
Inside dimensions drawer: W: 290 x D: 475 x H: 95 mm (6x)  
Load capacity per drawer: 25 kg


Workshop trolley | with 6 drawers |

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-985.001 / AG	1100 x 600 x 960	86.0	1000 x 600	400	160 x 40

Also available in ESD design on page 75

Load capacity shelf: 120 kg\*\*

A: Division grid compartment height: 25 mm  
B: Compartment width: 135 mm

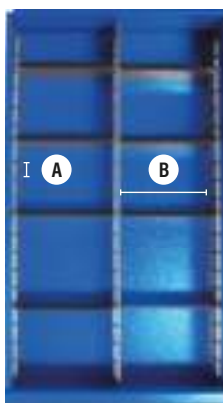

Made of galvanised sheet steel  
Pluggable  
3 longitudinal dividers, 8 dividing plates  
For products on pages: 75, 81, 82

## ADDITIONAL ARTICLE Drawer divider set

Article-no.	Dimension W x D x H (mm)	Weight kg
zsw-985.003	290 x 473 x 65	1.0



Workshop/Storage



\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: atamax@atamax.hu

# 82 WORKSHOP TROLLEYS



Working surface with edge on three sides  
Wing door and drawers lockable  
Trolleys with simultaneous locking  
**EasySTOP**



## CONSTRUCTION

- Welded steel construction

## FEATURES

- Working surface of beech finish plywood with 80 mm high edge
- Cupboards with 1 fixed and 2 variable cupboard shelves
- Removable shelves for insertion at 30 mm interval
- Drawers with sliding runners and cylinder lock

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, trolley and front RAL 5010 gentian blue or RAL 7016 anthracite grey, body RAL 7035 light grey, powder-coated

Inside dimensions cupboard: W: 560 x D: 515 x H: 660 mm  
2 variable cupboard shelves  
Load capacity per cupboard shelf: 30 kg  
Inside dimensions drawer: W: 290 x D: 475 x H: 95 mm (1x)  
W: 290 x D: 475 x H: 155 mm (2x)  
W: 290 x D: 475 x H: 130 mm (1x)  
Load capacity per drawer: 25 kg  
Drawer divider set on page 81



Workshop/Storage



### Workshop trolley | with 4 drawers and edge

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-985.002 / AG	1125 x 610 x 1040	85.0	1000 x 600	400	160 x 40

Load capacity shelf: 120 kg\*\*



### Workshop trolley | with 6 drawers and edge

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-985.003 / AG	1125 x 610 x 1040	87.5	1000 x 600	400	160 x 40

Load capacity shelf: 120 kg\*\*



### Cabinet | with hinged door | and 1 load surface

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.014 / AG	575 x 660 x 905	39.0	550 x 650	150	125 x 30

Load capacity shelf: 120 kg\*\*



### Cabinet | with 4 drawers | and 1 load surface

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-500.015 / AG	575 x 660 x 905	54.0	550 x 650	150	125 x 30

Load capacity shelf: 120 kg\*\*

Inside dimensions drawer: W: 390 x D: 535 x H: 95 mm (3x)  
W: 390 x D: 535 x H: 155 mm (1x)  
Load capacity per drawer: 25 kg  
Drawer divider set on page 80



Additional articles  
Pegboard tool panel  
Holder selection  
Material crates




For workshop trolley with roll-off edge

### ■ ADDITIONAL ARTICLE Pegboard tool panel

Article-no. + /Colour	Dimension W x H (mm)	Weight kg
<b>zsw-100.500 / AG</b>	995 x 450	7.0

### ■ ADDITIONAL ARTICLES Holder selection

Article-no.	28 pcs.	18 pcs.
<b>zsw-280.000</b> 28 Pieces	<b>1 x</b> 1 x Drill holder	
<b>zsw-180.000</b> 18 Pieces	<b>6 x</b> 3 x Double tool holder	
	<b>1 x</b> 0 x Machine holder	
	<b>2 x</b> 0 x Saw holder	
	<b>1 x</b> 1 x Screwdriver holder	
	<b>1 x</b> 1 x Spanner holder	
	<b>6 x</b> 5 x Tool holder with rising end	
	<b>8 x</b> 2 x Tool holder with vertical end	
	<b>0 x</b> 3 x Tool clamp	
	<b>2 x</b> 2 x Holder for pliers	

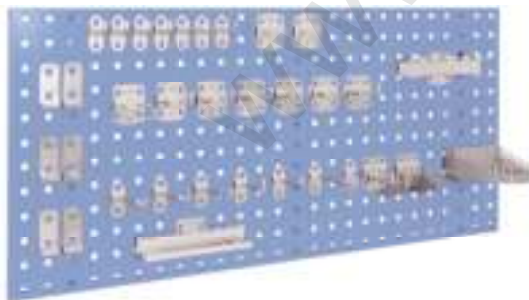

### ■ ADDITIONAL ARTICLE Material crate / green

Article-no.	Colour	Dimension W x D x H (mm)	Weight kg
<b>fk-105.002</b>	green	105 x 85 x 45	0.1

### ■ ADDITIONAL ARTICLE Material crate / red

Article-no.	Colour	Dimension W x D x H (mm)	Weight kg
<b>fk-140.002</b>	red	140 x 230 x 130	0.3

### ■ ADDITIONAL ARTICLE Material crate / yellow

Article-no.	Colour	Dimension W x D x H (mm)	Weight kg
<b>fk-105.003</b>	yellow	105 x 160 x 75	0.2

### ■ ADDITIONAL ARTICLE Material crate / blue

Article-no.	Colour	Dimension W x D x H (mm)	Weight kg
<b>fk-140.003</b>	blue	140 x 290 x 130	0.4

# 84 WORKPIECE TROLLEYS



2 vertical push bars

Wire mesh structure with slope of grid 8%

Optionally with additional top shelf

**EasySTOP**



## CONSTRUCTION

- Modular system
- Base structure with innovative frame section
- Screwed superstructure made of angle steel with welded mesh 75 x 75 mm

## FEATURES

- Load surface and additional top shelf of wood-based board, surface finish beech or coated dark grey
- Additional top shelf with 15 mm high edge, usable load surface: 1185 x 265 mm
- 2 vertical, fixed welded push bars
- Height of superstructure 1260 mm, slope of grid 8%

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Workshop/Storage



## Workpiece trolley

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-800.800 / AG	1370 x 800 x 1560	89.5	1260 x 2x245	500	200 x 40



## Workpiece trolley | with top shelf

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-800.801 / AG	1370 x 800 x 1585	97.5	1260 x 2x245	500	200 x 40

Load capacity shelf: 50 kg\*\*



## ADDITIONAL ARTICLE Bar for slide down safety

Article-no. + /Colour	Dimension W x H (mm)	Weight kg	Piece
gsw-800.203.1 / AG	1260 x 100	3.5	2



Additional articles  
Different carrier variants  
Material crates


## ADDITIONAL ARTICLE Thorn bracket

Article-no.	Dimension mm	Weight kg	Load cap. kg
zsw-800.800	10 diam. x 210	0.3	10
zsw-800.801	10 diam. x 310	0.4	10



## ADDITIONAL ARTICLE Pipe carrier

Article-no.	Dimension mm	Weight kg	Load cap. kg
zsw-800.802	16 diam. x 305	0.4	15
zsw-800.803	22 diam. x 305	0.5	25
zsw-800.804	27 diam. x 305	0.6	25




## ADDITIONAL ARTICLE Corrugated bracket

Article-no.	Dimension mm	Weight kg	Load cap. kg
zsw-800.805	320	0.8	25




## ADDITIONAL ARTICLE Fork bracket

Article-no.	Dimension mm	Weight kg	Load cap. kg
zsw-800.806	50 x 295	0.8	25



## ADDITIONAL ARTICLE Material box

Article-no.	Dimension W x D x H (mm)	Weight kg	Load cap. kg
zsw-800.807	265 x 150 x 110	1.5	25
zsw-800.808	1200 x 265 x 110	4.5	50



Workshop/Storage



## ADDITIONAL ARTICLE Material crate / green

Article-no.	Colour	Dimension W x D x H (mm)	Weight kg
fk-105.000	green	105 x 85 x 45	0.1

## ADDITIONAL ARTICLE Material crate / red

Article-no.	Colour	Dimension W x D x H (mm)	Weight kg
fk-140.000	red	140 x 230 x 130	0.3



## ADDITIONAL ARTICLE Material crate / yellow

Article-no.	Colour	Dimension W x D x H (mm)	Weight kg
fk-105.001	yellow	105 x 160 x 75	0.2

## ADDITIONAL ARTICLE Material crate / blue

Article-no.	Colour	Dimension W x D x H (mm)	Weight kg
fk-140.001	blue	140 x 290 x 130	0.4





One-sided  
Height of carrier-spars continuously adjustable  
4 carrier-spars per upright  
Width continuously adjustable



Workshop/Storage



## CONSTRUCTION

- Welded steel construction

## FEATURES

- 4 carrier-spars per upright
- Circa carrier-spar length 595 mm, height continuously adjustable, with scale for adjusting arrangement
- Load capacity per carrier-spar: 20 kg
- Width continuously adjustable

## FITTINGS

- 2 swivel castors, 1 of them with direction lock, 2 swivel castors with brakes
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



### Carrier-spar trolley | one-sided

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Load cap. kg	Wheel diam. mm
sw-130.006 / AG	540-1400 x 800 x 1800	49.0	400	160 x 40
sw-160.006 / AG	540-1700 x 800 x 1800	50.5	400	160 x 40

Load capacity carrier-spar arm: 20 kg\*\*

### Carrier-spar trolley | one-sided

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Load cap. kg	Wheel diam. mm
sw-210.006 / AG	840-2200 x 800 x 1800	72.5	400	160 x 40
sw-310.006 / AG	840-3200 x 800 x 1800	76.5	400	160 x 40

Load capacity carrier-spar arm: 20 kg\*\*



### ADDITIONAL ARTICLES Carrier-spars and slip off safety

Article-no. + /Colour	Dimension	Load cap. kg	Product variant
zsw-596.000 / AG	595 mm x 3/4"	20.0	Carrier-spar
zsw-596.001 / AG	595 mm x 3/4"	20.0	Carrier-spar with shrink hose
zsw-596.002	1 mm	-	Shrink hose*
zsw-596.003 / AG	595 mm x 3/4"	20.0	Carrier-spar with slip off safety
zsw-070.000	diam. 70 mm	-	Slip off safety*
zsw-596.004 / AG	595 mm x 3/4"	20.0	Carrier-spar with shrink hose and slip off safety

\* As ex-factory equipment

\*\*Total load of the transport device must not be exceeded!

RAL 5010 RAL 7016

## CONSTRUCTION

- Welded steel construction

## FEATURES

- 8 carrier-spars per upright
- Circa carrier-spar length 375 mm, height continuously adjustable, with scale for adjusting arrangement
- Load capacity per carrier-spar: 20 kg
- Width continuously adjustable

## FITTINGS

- 2 swivel castors, 1 of them with direction lock, 2 swivel castors with brakes
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Two-sided

Height of carrier-spars continuously adjustable

8 carrier-spars per upright

Width continuously adjustable



### Carrier-spar trolley | two-sided

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Load cap. kg	Wheel diam. mm
sw-130.007 / AG	540-1400 x 830 x 1800	57.0	400	160 x 40
sw-160.007 / AG	540-1700 x 830 x 1800	59.0	400	160 x 40

Load capacity carrier-spar arm: 20 kg\*\*



As ex-factory equipment



Workshop/Storage

### Carrier-spar trolley | two-sided

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Load cap. kg	Wheel diam. mm
sw-210.007 / AG	840-2200 x 830 x 1800	80.0	400	160 x 40
sw-310.007 / AG	840-3200 x 830 x 1800	84.0	400	160 x 40

Load capacity carrier-spar arm: 20 kg\*\*



### ADDITIONAL ARTICLES Carrier-spars and slip off safety

Article-no. + /Colour	Dimension	Load cap. kg	Product variant
zsw-376.000 / AG	375 mm x 3/4"	20.0	Carrier-spar
zsw-376.001 / AG	375 mm x 3/4"	20.0	Carrier-spar with shrink hose
zsw-376.002	1 mm	-	Shrink hose*
zsw-376.003 / AG	375 mm x 3/4"	20.0	Carrier-spar with slip off safety
zsw-070.000	diam. 70 mm	-	Slip off safety*
zsw-376.004 / AG	375 mm x 3/4"	20.0	Carrier-spar with shrink hose and slip off safety

\* As ex-factory equipment

\*\*Total load of the transport device must not be exceeded!

Ajánlatkérés: atamax@atamax.hu





One-sided load surface of plywood  
Load surface with 5° inclination

Workshop/Storage



## CONSTRUCTION

- Welded steel construction

## FEATURES

- One-sided load surface of plywood, tilts to 5°
- Height of side tubular support: 915 mm

## FITTINGS

- 2 swivel and 2 fixed castors, with **EasySTOP** (can be operated on one longitudinal and narrow side) or 2 swivel castors with brakes, 2 fixed castors with rhombic layout
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

## NEW

### Sheet-material trolley


Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
pl-150.010 / AG	1500 x 680 x 1200	47.5	1500 x 370	500	200 x 40

### Sheet-material trolley | with rhombic layout

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
pl-150.011 / AG	1500 x 680 x 1200	47.5	1500 x 370	500	200 x 40

Wheels in rhombic layout, info on page 166

## SHEET-MATERIAL TROLLEY ONE-/TWO-SIDED



## NEW

## CONSTRUCTION

- Welded steel construction

## FEATURES

- One-sided or two-sided load surfaces
- Tilts to 5°, sheet supports faced with rubber profile
- Base support width for one-sided layout: 430 mm, for two-sided layout: 2 x 270 mm

## FITTINGS

- 2 swivel and 2 fixed castors, with **EasySTOP** (can be operated on one longitudinal and narrow side)
- Elastic-solid rubber tyres on cast aluminium wheel rim with precision deepgroove ball bearings, black, with foot guard, wheels also available in grey
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

### Sheet-material trolley | one-sided

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-1305 / AG	1380 x 880 x 1700	53.5	1380 x 430	1200	200 x 50
sw-1605 / AG	1680 x 880 x 1700	64.0	1680 x 430	1200	200 x 50
sw-2005 / AG	2080 x 880 x 1700	81.5	2080 x 430	1200	200 x 50

### Sheet-material trolley | two-sided

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-1306 / AG	1380 x 880 x 1705	59.0	1380 x 2x270	1200	200 x 50
sw-1606 / AG	1680 x 880 x 1705	70.0	1680 x 2x270	1200	200 x 50
sw-2006 / AG	2080 x 880 x 1705	87.0	2080 x 2x270	1200	200 x 50

**RAL 5010** **RAL 7016**

## CONSTRUCTION

- Welded steel construction


## FEATURES

- Sheet-steel platform, toe plate sloping towards supporting frame, tilt 22°
- Also available: Version with variable panel retainer, for panel stack max. 200 x 1500 mm (D x H)

## FITTINGS

- Pneumatic tyres on steel wheel rim or solid-rubber tyres on special plastic wheel rim with precision deepgroove ball bearings and plastic wheel cap, additional 2 support rollers
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

For lengthways transport of large panels  
Sheet-steel platform, toe plate sloping towards supporting frame



## Sheet-material truck

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Toe plate W x D (mm)	Load cap. kg	Wheel diam. mm
<b>sk-710.035 / AG</b>	P 1260 x 680 x 1425	18.5	500 x 200	250	260 x 85
<b>sk-710.036 / AG</b>	SR 1260 x 680 x 1425	20.0	500 x 200	250	260 x 65

P = Pneumatic tyres, SR = Solid-rubber tyres



Workshop/Storage



## Sheet-material truck with panel retainer

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Toe plate W x D (mm)	Load cap. kg	Wheel diam. mm
<b>sk-710.045 / AG</b>	P 1260 x 680 x 1440	20.0	500 x 200	250	260 x 85
<b>sk-710.046 / AG</b>	SR 1260 x 680 x 1440	21.5	500 x 200	250	260 x 65

P = Pneumatic tyres, SR = Solid-rubber tyres

Ergonomic lifting and moving of loads



AG

## CONSTRUCTION

- Welded steel construction

## FEATURES

- Infinitely adjustable lifting range from 55 - 1300 mm using a hand crank
- Distance of load centre of gravity: 230 mm from mast
- Hand crank with self-locking winch
- Brake lever at an ergonomic height, brake acting on the solid-rubber tyres / swivel castors
- Large push bar for easy and simple manoeuvring
- Push bar with soft plastic grip cover

## FITTINGS

- Solid-rubber tyres on special plastic wheel rim with precision deepgroove ball bearings and plastic wheel cap, 2 front swivel castors made of polyurethane or 2 swivel castors with foot guard of grey non-marking thermoplastic rubber on plastic wheel rim with precision deepgroove ball bearings, 2 polyurethane cradle rollers at the front
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

**NEW**


Materiallifter | incl. forklift forks

Article-no. + /Colour	Dimension W x D x H (mm)	Forklift forks W (CW)* x D (mm)	Weight kg	Lifting range mm	Load cap. kg	Wheel diam. mm
sg-154.008 / AG	SR 575 x 845 x 1545	300 x 450	56.0	55-1300	250	260 x 65
sg-154.009 / AG	TR 620 x 730 x 1545	300 x 450	51.5	55-1300	250	160 x 40

\*CW = Clear width

SR = Solid-rubber tyres, TR = Thermoplastic rubber tyres

Workshop/Storage



For screwing onto the plate of the forklift forks

## ADDITIONAL ARTICLE Loading platform of diamond-tread

Article-no.	Dimension W x D (mm)	Weight kg	Suitable for	Load cap.
zsg-154.000	500 x 460	8.5	sg-154.008/09	According to the materiallifter



The platform is screwed to the back plate of the forklift forks and rests on the forklift forks



Load capacity, dimensions and load suspension means can be customised on request

RAL 5010 RAL 7016

## CONSTRUCTION

- Welded steel construction


## FEATURES

- Infinitely adjustable lifting range from 55 - 1300 mm using a hand crank
- Hand crank with self-locking winch
- Brake lever at an ergonomic height, brake acting on the solid-rubber tyres / swivel castors
- Large push bar for easy and simple manoeuvring
- Push bar with soft plastic grip cover

## FITTINGS

- Solid-rubber tyres on special plastic wheel rim with precision deepgroove ball bearings and plastic wheel cap, 2 front swivel castors made of polyurethane or 2 swivel castors with foot guard of grey non-marking thermoplastic rubber on plastic wheel rim with precision deepgroove ball bearings, 2 polyurethane cradle rollers at the front
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Various configuration options  
Simple exchange of the load suspension means



Workshop/Storage

**NEW**

## Materiallifter

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Lifting range mm	Load cap. kg	Wheel diam. mm
sg-154.018* / AG	SR 575 x 845 x 1545	48.5	55-1300	250	260 x 65
sg-154.019* / AG	TR 620 x 730 x 1545	44.0	55-1300	250	160 x 40

\*Can only be used in conjunction with below mentioned additional articles

SR = Solid-rubber tyres, TR = Thermoplastic rubber tyres

## ADDITIONAL ARTICLE Forklift forks for materiallifter

Article-no.	Dimension W (CW)* x D (mm)	Weight kg	Suitable for	Load cap.
zsg-154.001	300 x 450	7.5	sg-154.008/09 sg-154.018/19	According to the materiallifter

\*CW = Clear width

## ADDITIONAL ARTICLE Forklift forks for materiallifter adjustable

Article-no.	Dimension W (CW)* x D (mm)	Weight kg	Suitable for	Load cap.
zsg-154.002	60-390 x 450	10.5	sg-154.008/09 sg-154.018/19	According to the materiallifter

\*CM = Clear width

## ADDITIONAL ARTICLE Thorn for materiallifter

Article-no.	Dimension diam. x D (mm)	Weight kg	Suitable for	Load cap.
zsg-154.003	20-50 x 450	6.5	sg-154.008/09 sg-154.018/19	According to the materiallifter

Thorn diameter of 20-50 mm can be customised by the customer

## ADDITIONAL ARTICLE Loading platform of diamond-tread

Article-no.	Dimension W x D (mm)	Weight kg	Suitable for	Load cap.
zsg-154.000	500 x 460	8.5	sg-154.008/09	According to the materiallifter

Only together with forklift forks (zsg-154.001)

RAL 5010 RAL 7016

## CONSTRUCTION

- Welded steel construction
- Base structure with innovative frame section
- Floors set in angle-steel frame

## FEATURES

- Load surfaces of wood-based board, surface finish beech or coated dark grey
- Load surface with 15 mm high edge
- Step treads of waterproof bonded plywood, surface finish screen printed, anti-slip
- Steps lift automatically in the unloaded condition via a gas pressure spring

## FITTINGS

- 2 swivel castors with brakes, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Steps lift automatically via gas pressure spring  
Antislip treads



### Order-picking trolley | with 2 shelves, low

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.614 / AG	1455 x 625 x 1320	40.0	985 x 590	250	125 x 30

Shelf heights: 185 / 805 mm  
Height of top step: 500 mm  
Step height: 230 mm



Load capacity shelf: 80 kg\*\*

### Order-picking trolley | with 3 shelves, low

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.615 / AG	1455 x 625 x 1320	50.0	985 x 590	250	125 x 30

Shelf heights: 185 / 490 / 805 mm  
Height of top step: 500 mm  
Step height: 230 mm



Load capacity shelf: 80 kg\*\*

### Order-picking trolley | with 3 shelves, high

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.616 / AG	1695 x 625 x 1900	64.5	985 x 590	250	160 x 40

Shelf heights: 225 / 845 / 1465 mm  
Height of top step: 980 mm  
Step height: 230 mm



Load capacity shelf: 80 kg\*\*

### Order-picking trolley | with 4 shelves, high

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-600.617 / AG	1695 x 625 x 1900	77.0	985 x 590	250	160 x 40

Shelf heights: 225 / 695 / 1170 / 1645 mm  
Height of top step: 980 mm  
Step height: 230 mm



Load capacity shelf: 80 kg\*\*

Workshop/Storage

www.atamax.hu

\*\*Static distributed load; Total load of the transport device must not be exceeded!

Galvanised  
Various configuration options

## CONSTRUCTION

- Welded steel construction

## FEATURES

- Load surface, end and side walls and roof with mesh sides 50 x 100 mm or 100 x 50 mm
- 1 horizontal push bar or 2 vertical push bars painted RAL 2008 bright red orange
- Document pocket DIN A4 across
- Optionally 2 sheets for lable

## FITTINGS

- 2 swivel castors with brakes, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Galvanised




Workshop/Storage



### Order-picking trolley | galvanised

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-520.200	1860 x 650 x 1850	86.5	1675 x 615	300	125 x 30




Load surface use for Euro size containers



### Order-picking trolley | galvanised

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-490.100	1435 x 490 x 1820	43.5	1250 x 460	300	125 x 30



Load surface use for Euro size containers

## ADDITIONAL ARTICLES




### ADDITIONAL ARTICLE

**EasySTOP** central brake

Article-no.

rsa-125.500

As ex-factory equipment

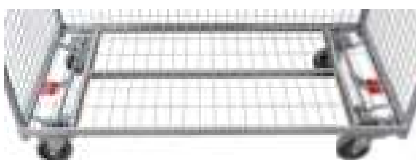

### ADDITIONAL ARTICLE

**EasySTOP** central brake  
accessible from both sides

Article-no.

rsa-000.050

2 brakes applied

rsa-000.051

4 brakes applied

As ex-factory equipment



Additional articles  
for order-picking trolleys

## ADJUSTMENT

- Customise the order-picking trolleys according to your processes

## CONFIGURATION

- Configure according to your wishes and requirements



### ADDITIONAL ARTICLE

Article-no.	Weight kg
-------------	--------------

#### COUPLING AND DRAWBAR

rsa-000.060

As ex-factory equipment



#### MIDDLE WHEEL

(Enables turning on the spot)

rsa-125.600

1.5

As ex-factory equipment



#### 3-TREAD STEPS

zsw-200.000

8.5

As ex-factory equipment



#### PUSH AND PULL BAR

zsw-100.004

1.2



#### DRINKS HOLDER

zsw-100.001

0.3



#### PLASTIC DIVIDER

zsw-490.103

1.4

zsw-520.203

1.7



### ADDITIONAL ARTICLE

Article-no.	Weight kg
-------------	--------------

#### SHELVES OF WIRE MESH BASE replaceable

zsw-490.100

4.5

zsw-520.200

5.5



#### SHELVES OF SHEET STEEL BASE replaceable

zsw-490.102

5.5

zsw-520.202

6.5



#### SHELVES OF WATERPROOF BONDED PLYWOOD, SURFACE FINISH SCREEN PRINTED replaceable

zsw-490.106

10.0

zsw-520.206

11.0



#### SHELVES OF WIRE MESH BASE WITH SCANNER RAIL replaceable

zsw-490.101

6.5

zsw-520.201

8.0



#### CLOTHES RAIL

zsw-490.104

1.5

zsw-520.204

1.5




#### FRONT WALL

zsw-490.105

7.5

zsw-520.205

8.5



Workshop/Storage

Shelf  
Distance pieces  
Plastic clips



AG



## CONSTRUCTION

- Welded steel construction

## FEATURES

- Galvanised connecting tubes, boltmounted
- For tyre diameter of 540 - 820 mm
- Inserting the shelf means that the middle shelf can then only be used for tyre diameter 540 - 650 mm

## FITTINGS

- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

### ADDITIONAL ARTICLE Shelf for tyre rack and tyre trolley

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg
<b>gsw-646.003 / AG</b>	1205 x 605 x 750	11.0	1140 x 395	150



Putting the galvanised distance pieces in the tubes of the tyre rack/trolley you can store tyres with diameter up to 820 mm instead of 650 mm in the second level even if a further level is installed

### ADDITIONAL ARTICLE Distance pieces for tyre rack and tyre trolley

Article-no.	Piece	Dimension W (mm)	Weight kg
<b>zsw-646.009</b>	4	160	0.4

Tyre handling



<sup>1</sup> For lower pipes of the tyre truck  
<sup>2</sup> For right pipes of the tyre truck  
<sup>3</sup> For left pipes of the tyre truck (clipboard)

### ADDITIONAL ARTICLE Plastic clips for tyre rack and tyre trolley

Article-no.	Piece	Dimension diam. / W (mm)	Weight kg
<b>zsw-646.005</b>	4	33.7 / 670 <sup>1</sup>	0.8
Set = 8 pieces	2	33.7 / 300 <sup>2</sup>	
	2	33.7 / 270 <sup>3</sup>	

<sup>1</sup> For pipes of the upper level  
<sup>2</sup> For pipes of the lower level

### ADDITIONAL ARTICLE Plastic clips for shelf for tyre rack and tyre trolley

Article-no.	Piece	Dimension diam. / W (mm)	Weight kg
<b>zsw-646.006</b>	4	33.7 / 275 <sup>1</sup>	0.4
Set = 8 pieces	4	33.7 / 260 <sup>2</sup>	



RAL 5010 RAL 7016

## CONSTRUCTION

- Welded steel construction
- Optionally push bar with dead man's brake, additional handle beneath the push bar

## FEATURES

- Push bar vertical or horizontal
- 2 shelves with hole cutouts diam. 160 mm or 170 mm
- Load surfaces of waterproof bonded plywood, surface finish screen printed, antislip
- For 24 or 18 bottles

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors or 2 swivel castors with dead man's brake, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

For 24 bottles, hole cutout diam. 160 mm

### Steel-cylinder trolley with dead man's brake

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.287 / AG	1280 x 775 x 1095	63.5	1120 x 760	500	200 x 40

For 24 bottles, hole cutout diam. 160 mm

### Steel-cylinder trolley


Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.295 / AG	1265 x 775 x 1000	60.0	1120 x 760	500	200 x 40

For 18 bottles, hole cutout diam. 170 mm

### Steel-cylinder trolley



Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-700.337 / AG	1265 x 775 x 1000	60.0	1120 x 760	500	200 x 40



Brake applied  
Brake released

Shelves with hole cutouts  
Waterproof bonded plywood  
**EasySTOP** or dead man's brake



Handling of steel-cylinder

RAL 5010 RAL 7016

## STEEL-CYLINDER TRUCK / STEEL-CYLINDER STAND

## CONSTRUCTION

- Welded steel construction
- Toe of sheet steel with edge surrounded on three sides

## FEATURES

- Steel-cylinder truck suitable for steel-cylinders with a capacity of 10 l, diam. 140 mm
- Steel-cylinder stand suitable for steel-cylinders with a capacity of 40 or 50 l, diam. 210 - 250 mm

- Steel-cylinder stand incl. hole for wall fastening
- Cylinder holder with safety chains

## FITTINGS

- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 charcoal grey powder coated


### Steel-cylinder truck for 2 steel-cylinders of 10 l capacity

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Toe Plate W x D (mm)	Load cap. kg	Wheel diam. mm
fk-1000 / AG	TR 565 x 370 x 1045	11.5	410 x 210	50	200 x 40

TR = Thermoplastic rubber tyres

### Steel-cylinder stand for 2 steel-cylinders of 40 - 50 l capacity

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Toe Plate W x D (mm)	Load cap. kg
fk-1001 / AG	570 x 285 x 1100	13.0	555 x 275	200

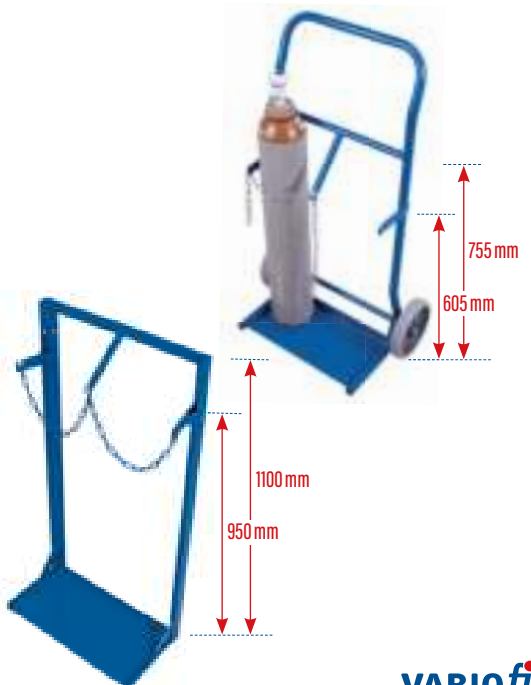



RAL 5010

RAL 7016

For pallets or cage pallets  
Incl. catching corners and fastening eyelets  
**EasySTOP**



## CONSTRUCTION

- Welded steel construction

## FEATURES

- For pallets or cage pallets
- Incl. catching corners and fastening eyelets

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim or polyamide tyres or elastic solid-rubber tyres on cast aluminium wheel rim with precision deepgroove ball bearings, black, wheels also available in grey or polyurethane tyres 92° Shore A, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



## Steel-frame dolly

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-870.041 / AG	TR 870 x 670 x 350	25.0	810 x 610	500	200 x 40
sw-870.015 / AG	TR 1070 x 870 x 350	28.0	1010 x 810	500	200 x 40
sw-870.000 / AG	TR 1270 x 870 x 350	32.0	1210 x 810	500	200 x 40
sw-870.020 / AG	TR 1270 x 1070 x 350	32.5	1210 x 1010	500	200 x 40

TR = Thermoplastic rubber tyres



## Steel-frame dolly

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-870.441 / AG	PT 870 x 670 x 350	25.0	810 x 610	1050	200 x 50
sw-870.415 / AG	PT 1070 x 870 x 350	27.5	1010 x 810	1050	200 x 50
sw-870.400 / AG	PT 1270 x 870 x 350	31.5	1210 x 810	1050	200 x 50
sw-870.420 / AG	PT 1270 x 1070 x 350	32.5	1210 x 1010	1050	200 x 50

PT = Polyamide tyres



Handling of pallets



## Steel-frame dolly

**BEST SELLER**

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-870.042 / AG	ER 870 x 670 x 350	29.5	810 x 610	1200	200 x 50
sw-870.036 / AG	ER 1070 x 870 x 350	32.5	1010 x 810	1200	200 x 50
sw-870.001 / AG	ER 1270 x 870 x 350	35.5	1210 x 810	1200	200 x 50
sw-870.501 / AG	ER 1270 x 1070 x 350	37.5	1210 x 1010	1200	200 x 50

ER = Elastic solid-rubber tyres



## Steel-frame dolly

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-870.341 / AG	PO 870 x 670 x 350	39.0	810 x 610	1800	200 x 50
sw-870.315 / AG	PO 1070 x 870 x 350	44.0	1010 x 810	1800	200 x 50
sw-870.300 / AG	PO 1270 x 870 x 350	47.5	1210 x 810	1800	200 x 50
sw-870.514 / AG	PO 1270 x 1070 x 350	49.5	1210 x 1010	1800	200 x 50

PO = Polyurethane tyres



RAL 5010 RAL 7016

## CONSTRUCTION

- Welded steel construction

## FEATURES

- For pallets or cage pallets
- Incl. catching corners and fastening eyelets
- 4 galvanised connecting tubes for insert into edges
- Angle-steel-frame stackable on connecting tubes
- Variable removable

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings or elastic solid-rubber tyres on cast aluminium wheel rim with precision deepgroove ball bearings, black with foot guard, wheels also available in grey
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Angle-steel-frame variable removable  
Incl. catching corners and fastening eyelets  
**EasySTOP**



### Steel-frame dolly with 2 angle-steel-frames

BEST SELLER



Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-870.113 / AG	TR 870 x 670 x 720	40.5	810 x 610	500	200 x 40
sw-870.114 / AG	TR 1070 x 870 x 720	44.0	1010 x 810	500	200 x 40
sw-870.100 / AG	TR 1270 x 870 x 720	48.0	1210 x 810	500	200 x 40
sw-870.506 / AG	TR 1270 x 1070 x 720	49.5	1210 x 1010	500	200 x 40

TR = Thermoplastic rubber tyres



### Steel-frame dolly with 2 angle-steel-frames

BEST SELLER

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg	Wheel diam. mm
sw-870.115 / AG	ER 870 x 670 x 720	45.0	810 x 610	1200	200 x 50
sw-870.116 / AG	ER 1070 x 870 x 720	48.5	1010 x 810	1200	200 x 50
sw-870.101 / AG	ER 1270 x 870 x 720	50.5	1210 x 810	1200	200 x 50
sw-870.507 / AG	ER 1270 x 1070 x 720	54.5	1210 x 1010	1200	200 x 50

ER = Elastic solid-rubber tyres



Handling of pallets

RAL 5010 RAL 7016

## ACCESSORIES | ADD-ON FRAME

## CONSTRUCTION

- Welded steel construction

## FEATURES

- Incl. 4 catching corners and fastening eyelets
- Height adjustment by internal spring-loaded bolt
- Add-on frame can be bolted to dolly

## FITTINGS

- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



Loading heights

- 1: 650 mm
- 2: 605 mm
- 3: 555 mm
- 4: 505 mm



### Add-on frame

Article-no. + /Colour	Dimension WxDxH (mm)	Weight kg	Loading surface WxD (mm)	Load cap. kg
zsw-870.101 / AG	870 x 670	14.5	810 x 610	in accordance with the steel-frame dolly
zsw-870.102 / AG	1070 x 870	16.5	1010 x 810	
zsw-870.103 / AG	1270 x 870	17.0	1210 x 810	
zsw-870.104 / AG	1270 x 1070	17.5	1210 x 1010	



Suitable for **VARIOfit®** steel-frame dollies  
 Lockable in in three basic positions  
 Additional tilt lock on the handle



## CONSTRUCTION

- Robust welded steel construction

## FEATURES

- Incl. 4 catching corners and fastening eyelets
- Lockable in three basic positions
- Basic position: horizontal position as well as tipping position approx. 18° per side
- Additional tilt lock on the handle
- Handle at both ends with red dipping caps

- Centre of gravity of the loaded goods 450 mm
- Securing the tipping unit to the steel-frame dolly with linchpins

## FITTINGS

- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



Handling of pallets



Additional tilt lock



Securing the tipping unit to the steel-frame dolly with linchpins



Release the basic position by pressing down the handle



The desired tilt position can be reached by swivelling the tipping unit and locked by releasing the handle



## Tipping unit | for steel-frame dollies

**OPTI-MISED**

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg
sw-810.014 / AG	1595 x 870 x 700	58,5	1210 x 810	*

\*In accordance with the steel-frame dolly

RAL 5010 RAL 7016 GALVANISED

## ADJUSTMENT

- Customise the steel-frame dollies according to your processes

## CONFIGURATION OPTIONS

- Configure according to your wishes and requirements

Additional articles  
Push bar variations  
Drawbar and coupling



Universal for all sizes  
Only for combined order with steel-frame dolly  
(Sockets fixed welded, push bar screw)

### ADDITIONAL ARTICLE Push bar for steel-frame dollies

Article-no. + /Colour	Dimension D x H (mm)	Weight kg
<b>zsw-870.002 / AG</b>	500 x 765	5.5

Universal for all sizes  
Customised to your profile possible on request

### ADDITIONAL ARTICLE Push bar with lever release for steel-frame dollies

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg
<b>zsw-870.540 / AG</b>	450 x 335 x 825	6.0

Maximum of 5 steel-frame dollies per tugger train  
Maximum travel speed: 6 km/h  
Maximum towing weight: 3.500 kg  
Universal for all sizes  
Only for combined order with steel-frame dolly (fixed welded)


### ADDITIONAL ARTICLE Shaft and coupling for steel-frame dollies

Article-no. + /Colour	Dimension H (mm)	Weight kg
<b>zsw-870.003 / AG</b>	680	5.0

Maximum of 5 steel-frame dollies per tugger train  
Maximum travel speed: 6 km/h  
Maximum towing weight: 3.500 kg  
Universal for all sizes  
Only for combined order with steel-frame dolly (fixed welded)

### ADDITIONAL ARTICLE Shaft with automatic brake solution and coupling

Article-no.	Dimension H (mm)	Weight kg
<b>zsw-870.019</b>	580	5.0

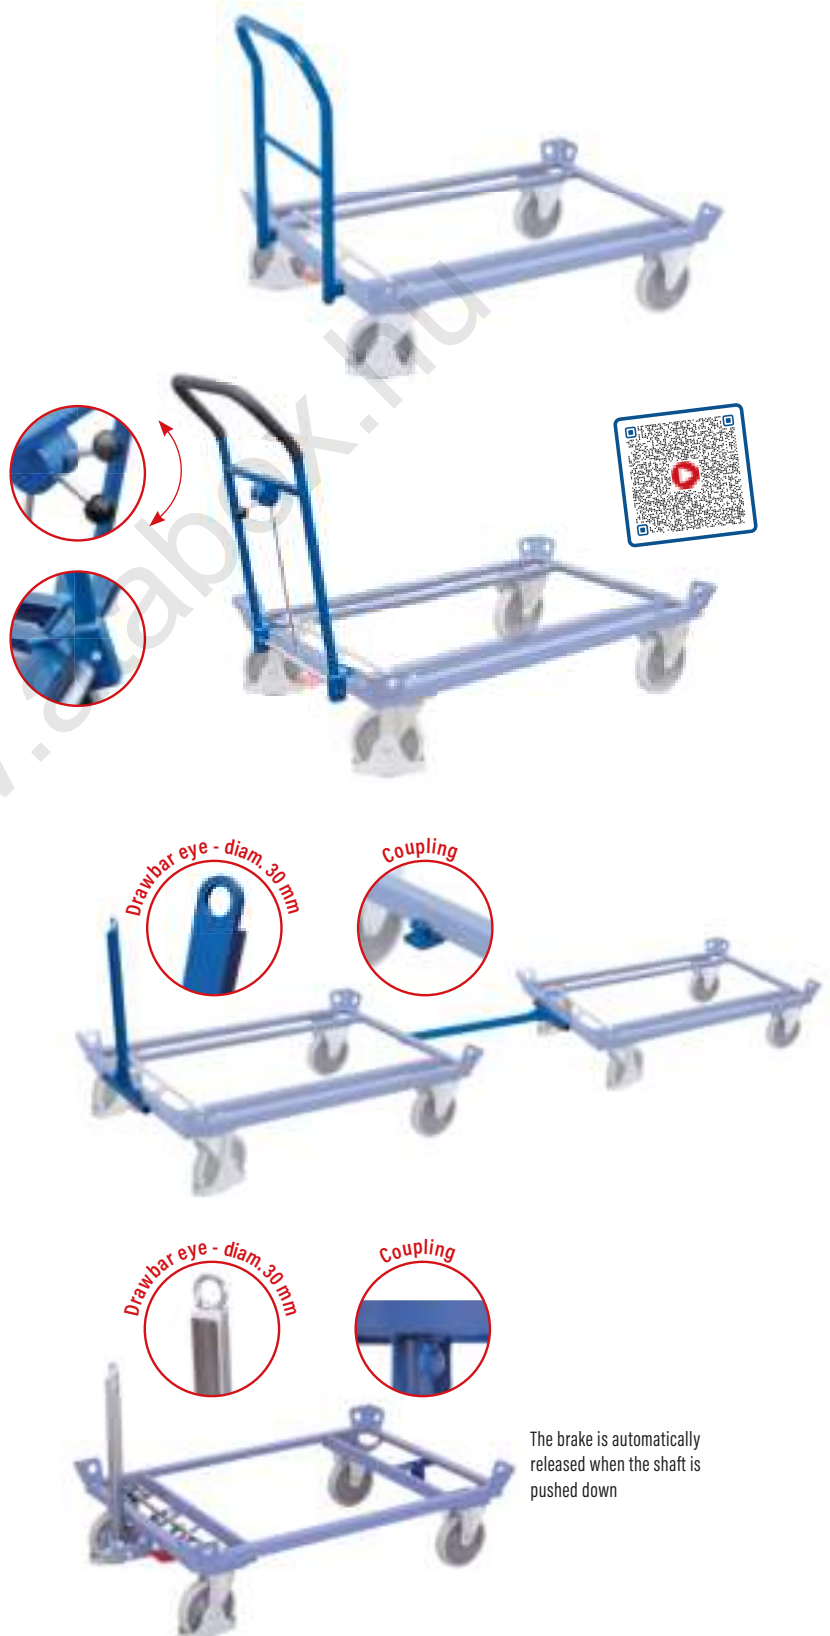

The brake is automatically released when the shaft is pushed down

Handling of pallets

**NEW**

RAL 5010 RAL 7016

## CONSTRUCTION

- Welded steel construction

## FEATURES

- Reflective films
- Optionally side walls with fastener
- 3 sides foldable, height of side wall: 210 mm
- Safety handle of drawbar with soft plastic grip cover black
- Automatic driving and parking brake, acting on the front wheels in two drawbar positions, control of the braking effect even on downgrade

- Automatically damped return to rest position
- Load surface and optionally side walls of water-proof bonded plywood, surface finish screen printed, anti-slip

## FITTINGS

- Pneumatic or solid-rubber tyres on steel wheel rim (solid-rubber tyres with diam. 260 x 65 mm on special plastic wheel rim) with precision deepgroove ball bearings
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Automatic driving and parking brake  
Optionally foldable side walls  
Reflective films



### Hand platform trolley | without side walls

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
zu-05102 / AG	P 1120 x 700 x 1200	47.5	1000 x 700	700	260 x 85
zu-05101 / AG	SR 1120 x 700 x 1200	51.0	1000 x 700	700	260 x 65
zu-05122 / AG	P 1320 x 800 x 1200	53.0	1200 x 800	700	260 x 85
zu-05121 / AG	SR 1320 x 800 x 1200	57.0	1200 x 800	700	260 x 65

P = Pneumatic tyres, SR = Solid-rubber tyres



### Hand platform trolley | without side walls

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
zu-05132 / AG	P 1265 x 800 x 1340	62.0	1200 x 800	1000	400 x 100
zu-05131 / AG	SR 1265 x 800 x 1340	88.5	1200 x 800	1000	400 x 80
zu-05162 / AG	P 1665 x 800 x 1340	68.5	1600 x 800	1000	400 x 100
zu-05161 / AG	SR 1665 x 800 x 1340	95.0	1600 x 800	1000	400 x 80
zu-05202 / AG	P 2065 x 1000 x 1340	84.0	2000 x 1000	1000	400 x 100
zu-05201 / AG	SR 2065 x 1000 x 1340	110.0	2000 x 1000	1250	400 x 80

P = Pneumatic tyres, SR = Solid-rubber tyres



### Hand platform trolley | with side walls

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
zu-15102 / AG	P 1135 x 730 x 1200	68.5	985 x 680	700	260 x 85
zu-15101 / AG	SR 1135 x 730 x 1200	72.5	985 x 680	700	260 x 65
zu-15122 / AG	P 1335 x 830 x 1200	76.0	1185 x 780	700	260 x 85
zu-15121 / AG	SR 1335 x 830 x 1200	79.5	1185 x 780	700	260 x 65

P = Pneumatic tyres, SR = Solid-rubber tyres



Trailers

### Hand platform trolley | with side walls

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
zu-15132 / AG	P 1280 x 830 x 1340	85.0	1185 x 780	1000	400 x 100
zu-15131 / AG	SR 1280 x 830 x 1340	111.0	1185 x 780	1000	400 x 80
zu-15162 / AG	P 1680 x 830 x 1340	93.5	1585 x 780	1000	400 x 100
zu-15161 / AG	SR 1680 x 830 x 1340	120.0	1585 x 780	1000	400 x 80
zu-15202 / AG	P 2080 x 1030 x 1340	112.0	1985 x 980	1000	400 x 100
zu-15201 / AG	SR 2080 x 1030 x 1340	138.5	1985 x 980	1250	400 x 80

P = Pneumatic tyres, SR = Solid-rubber tyres





Automatic driving and parking brakes  
Removable walls of tubular grid  
Reflective films



## CONSTRUCTION

- Welded steel construction

## FEATURES

- Reflective films
- Removable side walls of tubular grid
- End walls screwed, side walls suspended
- Height of tubular grid walls: 755 mm
- Safety handle of drawbar with soft plastic grip cover black
- Automatic driving and parking brake, acting on the front wheels in two drawbar positions, control of the braking effect even on downgrade

- Automatically damped return to rest position
- Load surface of waterproof bonded plywood, surface finish screen printed, anti-slip

## FITTINGS

- Pneumatic or solid-rubber tyres on steel wheel rim (solid-rubber tyres with diam. 260 x 65 mm on special plastic wheel rim) with precision deepgroove ball bearings
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



Hand platform trolley | with 2 tubular grid side walls

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
zu-42120 / AG	P 1120 x 715 x 1200	61.0	940 x 700	700	260 x 85
zu-42119 / AG	SR 1120 x 715 x 1200	65.0	940 x 700	700	260 x 65
zu-42122 / AG	P 1320 x 815 x 1200	67.5	1140 x 800	700	260 x 85
zu-42121 / AG	SR 1320 x 815 x 1200	71.0	1140 x 800	700	260 x 65

P = Pneumatic tyres, SR = Solid-rubber tyres



Hand platform trolley | with 2 tubular grid side walls

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
zu-42132 / AG	P 1265 x 815 x 1340	76.5	1140 x 800	1000	400 x 100
zu-42131 / AG	SR 1265 x 815 x 1340	103.0	1140 x 800	1000	400 x 80
zu-42162 / AG	P 1665 x 815 x 1340	83.0	1540 x 800	1000	400 x 100
zu-42161 / AG	SR 1665 x 815 x 1340	109.5	1540 x 800	1000	400 x 80
zu-42202 / AG	P 2065 x 1015 x 1340	99.5	1940 x 1000	1000	400 x 100
zu-42201 / AG	SR 2065 x 1015 x 1340	126.0	1940 x 1000	1250	400 x 80

P = Pneumatic tyres, SR = Solid-rubber tyres



Hand platform trolley | with 4 tubular grid side walls

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
zu-45102 / AG	P 1120 x 715 x 1200	74.0	940 x 640	700	260 x 85
zu-45101 / AG	SR 1120 x 715 x 1200	78.0	940 x 640	700	260 x 65
zu-45122 / AG	P 1320 x 815 x 1200	82.0	1140 x 740	700	260 x 85
zu-45121 / AG	SR 1320 x 815 x 1200	86.0	1140 x 740	700	260 x 65

P = Pneumatic tyres, SR = Solid-rubber tyres



Hand platform trolley | with 4 tubular grid side walls

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
zu-45132 / AG	P 1265 x 815 x 1340	91.0	1140 x 740	1000	400 x 100
zu-45131 / AG	SR 1265 x 815 x 1340	117.5	1140 x 740	1000	400 x 80
zu-45162 / AG	P 1665 x 815 x 1340	103.0	1540 x 740	1000	400 x 100
zu-45161 / AG	SR 1665 x 815 x 1340	129.5	1540 x 740	1000	400 x 80
zu-45202 / AG	P 2065 x 1015 x 1340	123.0	1940 x 940	1000	400 x 100
zu-45201 / AG	SR 2065 x 1015 x 1340	149.0	1940 x 940	1250	400 x 80

P = Pneumatic tyres, SR = Solid-rubber tyres

RAL 5010 RAL 7016

## QUALITY CHARACTERISTICS


- Automatic driving and parking brake, acting on the front wheels in two drawbar positions
- Control the braking effect even on downgrade
- Automatically damped return to rest position
- Braking point and braking effect manually adjustable
- Big fastener
- Red and white reflective films
- Can be extended with a drawbar eye and/or coupling

Quality characteristics

Additional articles

Drawbar eye on the drawbar

Coupling

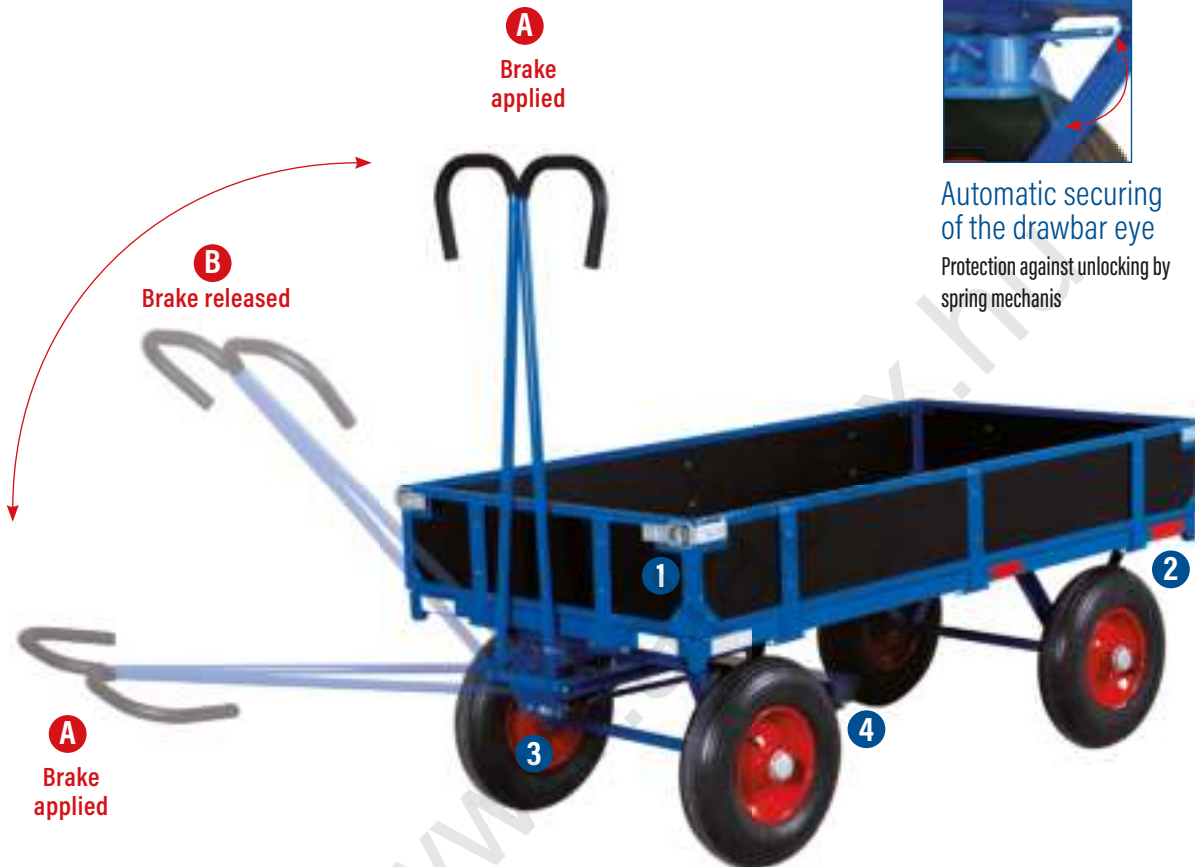

Automatic securing of the drawbar eye

Protection against unlocking by spring mechanism



Drawbar eye and/or coupling

All hand platform trolleys are optionally expandable, with the possibility to move the hand platform trolleys with the help of a towing vehicle, either individually or in a train formation



1 Big fastener

For easy and secure closing of the side walls



2 Reflective films

In red and white for your safety especially in the dark



3 Braking point/Braking effect

Manually adjustable



4 Brake position

A = Brake applied  
B = Brake released

## ADDITIONAL ARTICLE for hand platform trolleys

Article-no.+/Colour

01-1030 / AG

Drawbar eye on drawbar

01-1031 / AG

Coupling at the end

As ex-factory equipment



Without safety catch  
Suitable for two-  
wheeled platforms with  
a load capacity of 500 kg



## CONSTRUCTION

- With ball head of diameter 48 mm

## FEATURES

- Ball without safety catch
- 2 plastic handles
- Suitable for two-wheeled platforms with a load capacity of 500 kg

## FITTINGS

- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

### Quick-lift jack

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	For two-wheeled platforms with load cap. kg	Wheel diam. mm
zu-1100 / AG	TR 400 x 270 x 1205	7.0	500	200 x 40

TR = Thermoplastic rubber tyres

## TWO-WHEELED PLATFORMS

4-times stackable when  
unloaded  
Ball socket without safety catch

## CONSTRUCTION

- Welded steel construction

## FEATURES

- 2 support runners
- Ball socket without safety catch
- Load surface and optionally walls of wood-based board, surface finish beech or coated dark grey
- Walls permanently screwed, usable height: 315 mm
- Optionally with stacking corners and locating cups

## FITTINGS

- 4-times stackable when unloaded, stacking height: 590 mm
- 2 fixed castors, 2 stands
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



### Two-wheeled platform

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
zu-1109 / AG	905 x 495 x 285	28.5	895 x 495	500	200 x 40
zu-1110 / AG	1005 x 695 x 285	36.0	995 x 695	500	200 x 40
zu-1112 / AG	1205 x 795 x 285	41.5	1195 x 795	500	200 x 40
zu-1116 / AG	1605 x 895 x 285	49.5	1595 x 895	500	200 x 40

Stacking height 590 mm

Heavy-duty



### Two-wheeled platform | with end walls

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
zu-1120 / AG	1090 x 780 x 660	43.0	1000 x 700	500	200 x 40
zu-1121 / AG	1290 x 880 x 660	46.0	1200 x 800	500	200 x 40

Stacking height 590 mm



### Two-wheeled platform | with 4 walls

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
zu-1122 / AG	1090 x 780 x 660	52.5	975 x 675	500	200 x 40
zu-1123 / AG	1290 x 880 x 660	55.0	1175 x 775	500	200 x 40

**RAL 2002**

## CONSTRUCTION

- Steel construction with ball head of diameter 47 mm


## FEATURES

- With locking system
- Reliable engagement with two-wheeled platform

## FITTINGS

- Elastic solid-rubber tyres with ball bearings, black
- Available in RAL 2002 vermilion, painted

With locking system  
Suitable for two-wheeled platforms with a load capacity of 1000 - 3000 kg

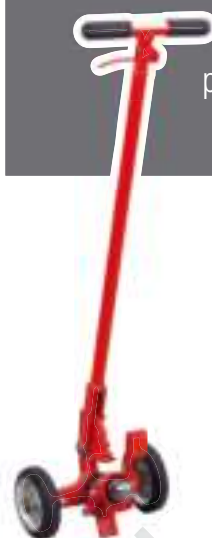

## Safety quick-lift jack

Article-no.		Dimension W x D x H (mm)	Weight kg	For two-wheeled platforms with load cap. kg	Wheel diam. mm
<b>zsw-1000</b>	ER	385 x 270 x 1275	18.0	1000	180 x 45
<b>zsw-1500</b>	ER	390 x 305 x 1305	22.0	1500	250 x 50
<b>zsw-2000</b>	ER	440 x 305 x 1305	25.0	2000	250 x 80
<b>zsw-3000</b>	ER	440 x 305 x 1305	25.0	3000	250 x 80

ER = Elastic solid-rubber tyres

**RAL 5010** **RAL 7016**

## CONSTRUCTION

- Welded steel construction

## FEATURES

- 2 support runners
- Ball socket with safety catch
- Load surface of waterproof bonded plywood, surface finish screen printed, anti-slip

## FITTINGS

- Elastic solid-rubber tyres on cast aluminium wheel rim with precision deepgroove ball bearings, mounted on a single axle
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated



## TWO-WHEELED PLATFORMS

2 support runners  
Ball socket with safety catch

## Two-wheeled platform

Article-no. + /Colour		Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
<b>zu-1130 / AG</b>	ER	1005 x 700 x 315	46.5	990 x 700	1000	200 x 50
<b>zu-1131 / AG</b>	ER	1205 x 800 x 315	57.0	1190 x 800	1000	200 x 50
<b>zu-1132 / AG</b>	ER	1605 x 900 x 315	62.5	1590 x 900	1000	200 x 50
<b>zu-1133 / AG</b>	ER	2005 x 1000 x 315	69.5	1990 x 1000	1000	200 x 50

ER = Elastic solid-rubber tyres



Heavy-duty

2 support runners

Ball socket with safety catch



AG

## CONSTRUCTION

- Welded steel construction

## FEATURES

- 2 support runners
- Ball socket with safety catch
- Load surface of waterproof bonded plywood, surface finish screen printed, anti-slip

## FITTINGS

- Elastic solid-rubber tyres or polyurethane tyres on cast aluminium wheel rim with precision deep-groove ball bearings, mounted on a single axle
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

## Two-wheeled platform

Article-no. + /Colour		Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
zu-1134	AG	ER 1005 x 700 x 340	51.0	990 x 700	1500	250 x 50
zu-1135	AG	ER 1205 x 800 x 340	54.5	1190 x 800	1500	250 x 50
zu-1136	AG	ER 1605 x 900 x 340	68.0	1590 x 900	1500	250 x 50
zu-1137	AG	ER 2005 x 1000 x 340	86.0	1990 x 1000	1500	250 x 50
zu-1138	AG	ER 2505 x 800 x 340	91.5	2490 x 800	1500	250 x 50
zu-1141	AG	PO 1205 x 800 x 340	57.0	1190 x 800	2000	250 x 50
zu-1142	AG	PO 1605 x 900 x 340	71.0	1590 x 900	2000	250 x 50
zu-1143	AG	PO 2005 x 1000 x 340	88.5	1990 x 1000	2000	250 x 50
zu-1144	AG	PO 2505 x 800 x 340	94.5	2490 x 800	2000	250 x 50
zu-1147	AG	PO 1205 x 800 x 340	54.5	1190 x 800	3000	250 x 50
zu-1148	AG	PO 1605 x 900 x 340	72.5	1590 x 900	3000	250 x 50
zu-1149	AG	PO 2005 x 1000 x 340	90.5	1990 x 1000	3000	250 x 50
zu-1150	AG	PO 2505 x 800 x 340	96.0	2490 x 800	3000	250 x 50

ER = Elastic solid-rubber tyres, PO = Polyurethane tyres



Heavy-duty



## Two-wheeled platform

Article-no. + /Colour		Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
zu-1139	AG	ER 3305 x 800 x 390	97.0	3290 x 800	1500	250 x 50
zu-1140	AG	ER 4005 x 800 x 390	187.5	3990 x 800	1500	250 x 50
zu-1145	AG	PO 3305 x 800 x 390	161.5	3290 x 800	2000	250 x 50
zu-1146	AG	PO 4005 x 800 x 390	194.0	3990 x 800	2000	250 x 50
zu-1151	AG	PO 3305 x 800 x 390	161.5	3290 x 800	3000	250 x 50
zu-1152	AG	PO 4005 x 800 x 390	194.0	3990 x 800	3000	250 x 50

ER = Elastic solid-rubber tyres, PO = Polyurethane tyres

RAL 5010 RAL 7016

## CONSTRUCTION

- Welded steel construction


## FEATURES

- Push-fit tubular steel stanchions, galvanised
- Fill height of the stanchions: 610 mm
- Clear depth between the stanchions: 615 mm
- Centre free for loading by crane or stacker truck

## FITTINGS

- Centre wheel set diam. 360 x 60 mm of elastic solid-rubber or polyurethane, at each end wall one swivel castor with brake diam. 200 x 50 mm
- Elastic solid-rubber or polyurethane tyres on cast aluminium wheel rim with precision deepgroove ball bearings, with foot guard, elastic solid-rubber tyres also available in grey
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Push-fit tubular steel stanchions  
Centre free for loading by crane  
or stacker truck



AG

## Long-goods trolley | with 4 stanchions

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Fill height mm	Load cap. kg	Wheel diam. mm
sw-2500 / AG	ER 2500 x 760 x 1030	115.0	2500 x 615	610	2000	360 x 60 / 200 x 50
sw-2501 / AG	PO 2500 x 760 x 1030	123.0	2500 x 615	610	3000	360 x 60 / 200 x 50

ER = Elastic solid-rubber tyres, PO = Polyurethane tyres



Wheels also available in grey

RAL 5010 RAL 7016

## CONSTRUCTION

- Welded steel construction

## FEATURES

- Push-fit tubular steel stanchions, galvanised
- Fill height of the stanchions: 610 mm
- Clear width between the stanchions: 625 mm
- Load surface of waterproof bonded plywood, surface finish screen printed, anti-slip

## FITTINGS

- 4 swivel castors, 2 of them with brake
- Elastic solid-rubber tyres on cast aluminium wheel rim with precision deepgroove ball bearings, with foot guard, wheels also available in grey
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

## LONG-GOODS DOLLY

Push-fit tubular steel stanchions



Wheels also available in grey

## Long-goods dolly

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Fill height mm	Load cap. kg	Wheel diam. mm
sw-700.710 / AG	700 x 700 x 940	51.5	625 x 625	610	1200	200 x 50



Heavy-duty



RAL 5010

RAL 7016

Plug-in stanchions

End walls with horizontal push bar

**EasySTOP** on one longitudinal and narrow sides



AG



**NEW**



Wheels also available in grey

## CONSTRUCTION

- Modular system
- Welded steel construction

## FEATURES

- Without or with load surface of waterproof bonded plywood, surface finish screen printed, anti-slip
- Optionally end walls with vertical tubes
- End walls with horizontal push bar
- Height of end walls: 800 mm
- Optionally galvanised, plug-in stanchions
- Length of stanchion: 625 mm

## FITTINGS

- 2 swivel and 2 fixed castors, with **EasySTOP** (can be operated on one longitudinal and narrow side)
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- From 1200 kg load capacity elastic solid-rubber tyres on cast aluminium wheel rim with precision deepgroove ball bearings, black, with foot guard, wheels also available in grey
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

## Heavy-duty trolley



Article-no. + /Colour		Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
zu-1225	AG	TR 1380 x 880 x 305	42.0	1380 x 880	500	200 x 40
zu-1226	AG	ER 1380 x 880 x 305	47.0	1380 x 880	1200	200 x 50
zu-1227	AG	TR 1680 x 880 x 305	49.5	1680 x 880	500	200 x 40
zu-1228	AG	ER 1680 x 880 x 305	53.0	1680 x 880	1200	200 x 50
zu-1229	AG	TR 2080 x 880 x 305	55.5	2080 x 880	500	200 x 40
zu-1230	AG	ER 2080 x 880 x 305	60.5	2080 x 880	1200	200 x 50

TR = Thermoplastic rubber tyres, ER = Elastic solid-rubber tyres

## Stanchion trolley



Article-no. + /Colour		Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-1310	AG	TR 1380 x 880 x 930	47.5	1380 x 805	500	200 x 40
sw-1300	AG	ER 1380 x 880 x 930	52.0	1380 x 805	1200	200 x 50
sw-1610	AG	TR 1680 x 880 x 930	53.0	1680 x 805	500	200 x 40
sw-1600	AG	ER 1680 x 880 x 930	57.0	1680 x 805	1200	200 x 50
sw-2010	AG	TR 2080 x 880 x 930	62.5	2080 x 805	500	200 x 40
sw-2000	AG	ER 2080 x 880 x 930	67.0	2080 x 805	1200	200 x 50

TR = Thermoplastic rubber tyres, ER = Elastic solid-rubber tyres

Heavy-duty

## Single-end trolley | with vertical tubes



Article-no. + /Colour		Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-1312	AG	TR 1475 x 900 x 1105	59.5	1345 x 880	500	200 x 40
sw-1302	AG	ER 1475 x 900 x 1105	64.0	1345 x 880	1200	200 x 50
sw-1612	AG	TR 1775 x 900 x 1105	67.5	1645 x 880	500	200 x 40
sw-1602	AG	ER 1775 x 900 x 1105	72.0	1645 x 880	1200	200 x 50
sw-2012	AG	TR 2175 x 900 x 1105	82.0	2045 x 880	500	200 x 40
sw-2002	AG	ER 2175 x 900 x 1105	86.5	2045 x 880	1200	200 x 50

TR = Thermoplastic rubber tyres, ER = Elastic solid-rubber tyres



RAL 5010 RAL 7016

## CONSTRUCTION

- Modular system
- Welded steel construction

## FEATURES

- Load surface of waterproof bonded plywood, surface finish screen printed, anti-slip
- End and side walls with vertical tubes
- End walls with horizontal push bar
- Height of end and side walls: 800 mm
- Side walls removable

## FITTINGS

- 2 swivel and 2 fixed castors, with **EasySTOP** (can be operated on one longitudinal and narrow side)
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- From 1200 kg load capacity elastic solid-rubber tyres on cast aluminium wheel rim with precision deepgroove ball bearings, black, with foot guard, wheels also available in grey
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

End walls with horizontal push bar

Side walls removable

**EasySTOP** on one longitudinal and narrow sides



**NEW**

## Double-end trolley | with vertical tubes

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface		Load cap. kg	Wheel diam. mm
			W x D (mm)	kg		
sw-1313 / AG	TR 1575 x 900 x 1105	68.0	1305 x 880	500	200 x 40	
sw-1303 / AG	ER 1575 x 900 x 1105	72.5	1305 x 880	1200	200 x 50	
sw-1613 / AG	TR 1875 x 900 x 1105	76.0	1605 x 880	500	200 x 40	
sw-1603 / AG	ER 1875 x 900 x 1105	80.5	1605 x 880	1200	200 x 50	
sw-2013 / AG	TR 2275 x 900 x 1105	90.5	2005 x 880	500	200 x 40	
sw-2003 / AG	ER 2275 x 900 x 1105	95.0	2005 x 880	1200	200 x 50	

TR = Thermoplastic rubber tyres, ER = Elastic solid-rubber tyres



## Three-sided trolley | with vertical tubes

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface		Load cap. kg	Wheel diam. mm
			W x D (mm)	kg		
sw-1317 / AG	TR 1575 x 900 x 1105	78.0	1305 x 845	500	200 x 40	
sw-1307 / AG	ER 1575 x 900 x 1105	82.0	1305 x 845	1200	200 x 50	
sw-1617 / AG	TR 1875 x 900 x 1105	86.5	1605 x 845	500	200 x 40	
sw-1607 / AG	ER 1875 x 900 x 1105	89.5	1605 x 845	1200	200 x 50	
sw-2017 / AG	TR 2275 x 900 x 1105	96.0	2005 x 845	500	200 x 40	
sw-2007 / AG	ER 2275 x 900 x 1105	99.5	2005 x 845	1200	200 x 50	

TR = Thermoplastic rubber tyres, ER = Elastic solid-rubber tyres



## Four-sided trolley | with vertical tubes

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface		Load cap. kg	Wheel diam. mm
			W x D (mm)	kg		
sw-1314 / AG	TR 1575 x 900 x 1105	86.5	1305 x 810	500	200 x 40	
sw-1304 / AG	ER 1575 x 900 x 1105	90.5	1305 x 810	1200	200 x 50	
sw-1614 / AG	TR 1875 x 900 x 1105	95.0	1605 x 810	500	200 x 40	
sw-1604 / AG	ER 1875 x 900 x 1105	97.5	1605 x 810	1200	200 x 50	
sw-2014 / AG	TR 2275 x 900 x 1105	104.5	2005 x 810	500	200 x 40	
sw-2004 / AG	ER 2275 x 900 x 1105	108.0	2005 x 810	1200	200 x 50	

TR = Thermoplastic rubber tyres, ER = Elastic solid-rubber tyres



Heavy-duty



Pulse-welded steel construction  
Turnable steering with heavy-duty  
precision deepgroove ball bearings

## CONSTRUCTION

- Extremely robust, pulse-welded steel-section construction

## FEATURES

- With rounded corners
- Turnable steering with heavy-duty precision deepgroove ball bearings
- Steering ring with safety stop in accordance with German accident prevention regulations (UVV)
- Maximum speed: 6 km/h
- Standard drawbar eye for 30 mm coupling bolts

- Compatible towing hitch height: 400 - 600 mm
- Load surface of waterproof bonded plywood, surface finish screen printed, anti-slip

## FITTINGS

- Heavy-duty wheels in robust welded-steel construction with elastic solid-rubber tyres or heavy-duty pneumatic wheels with industrial tread
- The hubs are fitted with dustproof encapsulated, pre-lubricated bearings in accordance with DIN ISO 355 or 15-1981.
- Available in RAL 2004 pure orange

### Industrial trailer | with 1-axle turnable steering

Article-no.	Loading surface W x D (mm)	Fill height mm	Weight kg	Load cap. kg	Wheel diam. mm
zu-1001	SR 2000 x 1000	510	285.0	2000	360 x 60
zu-1002	P 2000 x 1000	540	270.0	2000	410 x 110
zu-1003	SR 2500 x 1250	510	335.0	2000	360 x 60
zu-1004	P 2500 x 1250	540	315.0	2000	410 x 110
zu-1005	SR 3000 x 1500	510	390.0	2000	360 x 60
zu-1006	P 3000 x 1500	540	375.0	2000	410 x 110
zu-1007	SR 2000 x 1000	530	285.0	3000	400 x 75
zu-1008	P 2000 x 1000	560	270.0	3000	460 x 140
zu-1009	SR 2500 x 1250	530	335.0	3000	400 x 75
zu-1010	P 2500 x 1250	560	320.0	3000	460 x 140
zu-1011	SR 3000 x 1500	530	390.0	3000	400 x 75
zu-1012	P 3000 x 1500	560	375.0	3000	460 x 140
zu-1013	SR 2000 x 1000	530	315.0	5000	400 x 130
zu-1014	P 2000 x 1000	700	310.0	5000	530 x 160
zu-1015	SR 2500 x 1250	530	355.0	5000	400 x 130
zu-1016	P 2500 x 1250	700	350.0	5000	530 x 160
zu-1017	SR 3000 x 1500	530	400.0	5000	400 x 130
zu-1018	P 3000 x 1500	700	395.0	5000	530 x 160

P = Pneumatic tyres, SR = Solid-rubber tyres

### Industrial trailer | with 2-axle turnable steering

Article-no.	Loading surface W x D (mm)	Fill height mm	Weight kg	Load cap. kg	Wheel diam. mm
zu-1031	SR 2000 x 1000	510	300.0	2000	360 x 60
zu-1032	P 2000 x 1000	540	285.0	2000	410 x 110
zu-1033	SR 2500 x 1250	510	350.0	2000	360 x 60
zu-1034	P 2500 x 1250	540	335.0	2000	410 x 110
zu-1035	SR 3000 x 1500	510	405.0	2000	360 x 60
zu-1036	P 3000 x 1500	540	390.0	2000	410 x 110
zu-1037	SR 2000 x 1000	530	300.0	3000	400 x 75
zu-1038	P 2000 x 1000	560	285.0	3000	460 x 140
zu-1039	SR 2500 x 1250	530	350.0	3000	400 x 75
zu-1040	P 2500 x 1250	560	335.0	3000	460 x 140
zu-1041	SR 3000 x 1500	530	405.0	3000	400 x 75
zu-1042	P 3000 x 1500	560	395.0	3000	460 x 140
zu-1043	SR 2000 x 1000	530	330.0	5000	400 x 130
zu-1044	P 2000 x 1000	700	325.0	5000	530 x 160
zu-1045	SR 2500 x 1250	530	370.0	5000	400 x 130
zu-1046	P 2500 x 1250	700	365.0	5000	530 x 160
zu-1047	SR 3000 x 1500	530	415.0	5000	400 x 130
zu-1048	P 3000 x 1500	700	410.0	5000	530 x 160

P = Pneumatic tyres, SR = Solid-rubber tyres

1-axle turnable steering



2-axle turnable steering



Heavy-duty

RAL  
2004



Additional articles  
Push-fit stanchions  
Side walls  
Tubular steel walls

**ADDITIONAL ARTICLE** Four push-fit stanchions, usable length: 600 mm

Article-no.

zu-1069


2 sides foldable  
Front wall fixed but removable  
4 locks

**ADDITIONAL ARTICLE** 4 side walls, 400 mm high

Article-no. For loading surface  
W x D (mm)

zu-1060	2000 x 1000
zu-1061	2500 x 1250
zu-1062	3000 x 1500

As ex-factory equipment

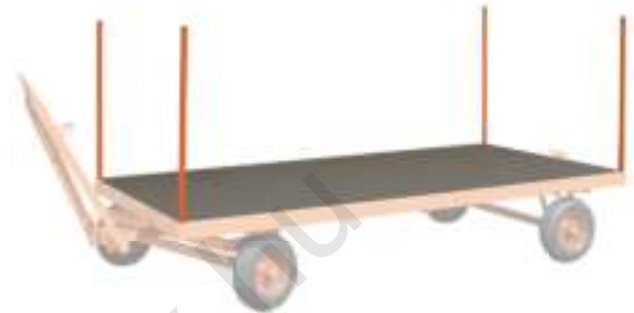

**ADDITIONAL ARTICLE** 2 tubular-steel end walls, 750 mm high, removable

Article-no. For loading surface  
W x D (mm)

zu-1063	2000 x 1000
zu-1064	2500 x 1250
zu-1065	3000 x 1500



**ADDITIONAL ARTICLE** 4 tubular-steel walls, 750 mm high, removable, sides insertable

Article-no. For loading surface  
W x D (mm)

zu-1066	2000 x 1000
zu-1067	2500 x 1250
zu-1068	3000 x 1500



Heavy-duty

Colour blue (other colours on request)

Practical and in a double pack

## CONSTRUCTION

- Plywood panel with non-slip covering

## FEATURES

- All dolly products are available in packaging units of 2 dollies

## FITTINGS

- 4 swivel castors
- Polyamide tyres with precision deepgroove ball bearings, white or grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings
- Colour blue



### Dollies | with polyamide swivel castors

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
<b>mh-934.003</b>	600 x 350 x 145	5.0	600 x 350	500	100 x 36
<b>mh-938.000</b>	600 x 350 x 175	6.0	600 x 350	500	125 x 40
<b>mh-951.013</b>	600 x 300 x 145	5.5	600 x 300	500	100 x 36

Packaging units of 2 dollies



### Dollies | with thermoplastic rubber swivel castors

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
<b>mh-935.003</b>	600 x 350 x 145	5.5	600 x 350	300	100 x 32
<b>mh-939.000</b>	600 x 350 x 175	6.0	600 x 350	300	125 x 30
<b>mh-935.020</b>	600 x 300 x 145	5.5	600 x 300	300	100 x 32

Packaging units of 2 dollies



### Dollies | with thermoplastic rubber swivel castors (Premium)

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
<b>mh-949.050</b>	600 x 350 x 145	5.0	600 x 350	350	100 x 32
<b>mh-948.050</b>	600 x 350 x 175	6.0	600 x 350	350	125 x 30
<b>mh-949.051</b>	600 x 300 x 145	5.0	600 x 300	350	100 x 32

Packaging units of 2 dollies




Non-slip covering in different colours on request!

## DOLLY COLLECTOR

RAL 5012 RAL 7016

Special

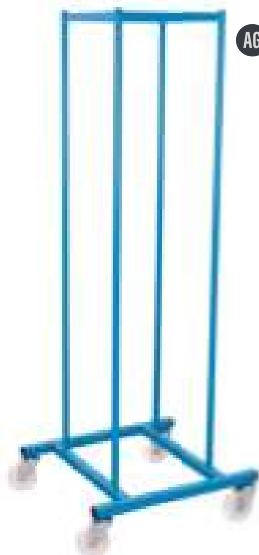

AG

## CONSTRUCTION

- Welded steel construction

## FEATURES

- For approx. 40 dollies measuring 600 x 300 mm (W x D) or 600 x 350 mm (W x D)

## FITTINGS

- 4 swivel castors
- Polyamide tyres with precision deepgroove ball bearings, white
- Available in 2 colours, RAL 5012 light blue or RAL 7016 anthracite grey, powder-coated

Dolly collector in special dimensions on request

### Dolly collector

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface dolly	Load cap. kg	Wheel diam. mm
<b>mh-942.500 / AG</b>	700 x 740 x 2000	22.0	40x	250	125 x 40

Black

## CONSTRUCTION

- Plywood panel with rubber buffer or with bonded grooved rubber mat

## FEATURES

- Dolly Europa surrounded with rubber cover as additional collision protection for walls and doors
- All dolly products are available in packaging units of 2 dollies

## FITTINGS

- 4 swivel castors
- Polyamide tyres with precision deepgroove ball bearings, white or grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings
- Colour black

Practical and in a double pack  
Europa rubber buffer  
or bonded grooved rubber mat  
Colour black

### Dolly Europa | with polyamide swivel castors

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
<b>mh-936.003</b>	600 x 350 x 145	5.5	600 x 350	500	100 x 36

Packaging units of 2 dollies



### Dolly Europa | with thermoplastic rubber swivel castors

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
<b>mh-937.003</b>	600 x 350 x 145	6.5	600 x 350	300	100 x 32

Packaging units of 2 dollies



### Dolly Europa | with thermoplastic rubber swivel castors (Premium)

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
<b>mh-949.300</b>	600 x 350 x 145	6.0	600 x 350	350	100 x 32

Packaging units of 2 dollies



### Dollies | with polyamide swivel castors

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
<b>mh-934.017</b>	600 x 350 x 145	5.0	600 x 350	500	100 x 36
<b>mh-938.500</b>	600 x 350 x 175	6.0	600 x 350	500	125 x 40
<b>mh-951.500</b>	600 x 300 x 145	4.5	600 x 300	500	100 x 36

Packaging units of 2 dollies



### Dollies | with thermoplastic rubber swivel castors

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
<b>mh-935.014</b>	600 x 350 x 145	6.0	600 x 350	300	100 x 32
<b>mh-939.500</b>	600 x 350 x 175	6.5	600 x 350	300	125 x 30
<b>mh-935.500</b>	600 x 300 x 145	5.5	600 x 300	300	100 x 32

Packaging units of 2 dollies



Special

Practical and in a double pack

Colour natural

Recessed grip

## CONSTRUCTION

- Plywood panel, raw

## FEATURES

- Recessed grip
- All dolly products are available in packaging units of 2 dollies

## FITTINGS

- 3 swivel castors
- Polyamide tyres with precision deepgroove ball bearings, white or grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings



### Triple-Dog | with polyamide swivel castors

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
mh-540.000	540 x 540 x 145	3.0	540 x 540	300	100 x 36

Packaging units of 2 dollies

### Triple-Dog | with thermoplastic rubber swivel castors

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
mh-540.500	540 x 540 x 145	3.5	540 x 540	200	100 x 32

Packaging units of 2 dollies

## DOLLIES

Blue

## CONSTRUCTION

- Plywood panel with non-slip covering

## FEATURES

- All dolly products are available in packaging units of 2 dollies

## FITTINGS

- 4 swivel castors
- Polyamide tyres with precision deepgroove ball bearings, white or grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings
- Colour blue



### Dolly | with polyamide swivel castors

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
mh-938.024	600 x 600 x 175	10.5	600 x 600	900	125 x 40

Packaging units of 2 dollies

Special



### Dolly | with thermoplastic rubber swivel castors

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
mh-950.003	600 x 600 x 255	11.5	600 x 600	750	200 x 40

Packaging units of 2 dollies

Filing and transporting files and books



## CONSTRUCTION

- Welded steel construction

## FEATURES

- Document compartment enclosed on 3 sides
- End and side wall height: 505 mm
- Load surface inclined at 10° towards back
- 1 push bar at each end

## FITTINGS

- 4 swivel castors with brakes
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings
- Available in 2 colours, RAL 7035 light grey or RAL 7016 anthracite grey, powder-coated

### Document trolley

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D x H (mm)	Load cap. kg	Wheel diam. mm
sw-500.380 / AG	625 x 550 x 1025	25.0	550 x 500 x 420	100	100 x 32

## DOCUMENT TROLLEY WITH 12 COMPARTMENTS

Fixed welded  
**EasySTOP**



## CONSTRUCTION

- Robust angle-steel construction

## FEATURES

- 6 compartments on each side
- Superstructure and compartments of waterproof bonded plywood, surface finish screen printed
- Shelves with 9° inclination to the middle wall
- One push bar directed upwards on each end side

- Base frame with surrounding protective strip of plastic profile

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

\*Compartment size: 340 x 320 x 345 mm (W x D x H)

### Document trolley with 12 compartments

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface compartments*	Load cap. kg	Wheel diam. mm
sw-700.995 / AG	1105 x 700 x 1185	66.5	2 x 6	400	200 x 40

Load capacity shelf: 30 kg\*\*

## BOOK TROLLEY

Special



## CONSTRUCTION

- Welded steel construction

## FEATURES

- 3 sloping shelves for transport and storage of books
- Shelves with 5° inclination to the rear wall
- 1 push bar at each end

## FITTINGS

- 4 swivel castors, 2 of them with brakes
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

### Book trolley

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface W x D (mm)	Load cap. kg	Wheel diam. mm
sw-300.000 / AG	1085 x 300 x 900	26.0	830 x 265	150	75 x 25

Load capacity shelf: 50 kg\*\*



RAL 5010 RAL 7016

## CONSTRUCTION

- Welded steel construction

## FEATURES


- 10 compartments at each end
- Shelves of waterproof bonded plywood, surface finish screen printed, tilt 5° to the middle wall
- Middle wall with mesh 50 x 100 mm
- Side walls of perforated sheet
- 2 vertical push bars on one side

- Push bars projecting 100 mm
- Base frame with surrounding protective strip of plastic profile

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Available in 2 colours, RAL 5010 gentian blue or RAL 7016 anthracite grey, powder-coated

Filing and transport of files  
Fixed welded  
**EasySTOP**

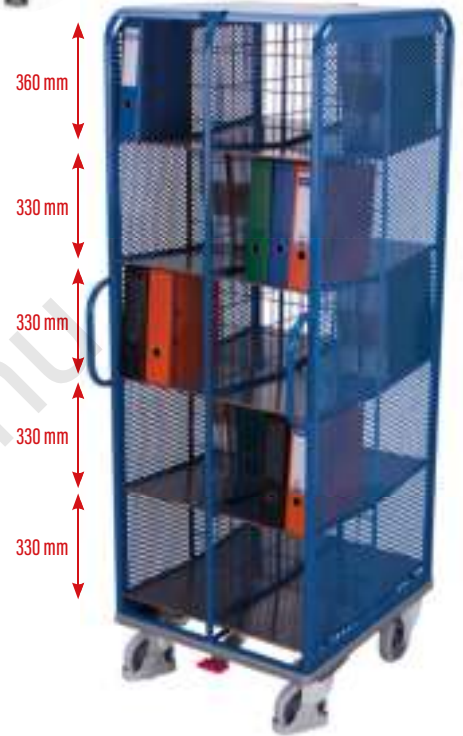

\*Compartment size: 305 x 345 x 330 mm (W x D x H)

Document trolley | with 20 compartments

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Loading surface compartments*	Load cap. kg	Wheel diam. mm
sw-574.002 / AG	690 x 860 x 2015	69.0	2 x 10	500	160 x 40

Load capacity shelf: 25 kg\*\*



RAL 5010

## CONSTRUCTION

- Robust angle-steel construction

## FEATURES

- 9 compartments for files
- Superstructure and compartments of wood-based board, surface finish beech
- Compartments lockable by roller shutter with cylinder lock
- Recessed grip at end
- Base frame with surrounding protective strip of plastic profile

## FITTINGS

- 2 **EasySTOP** swivel castors, 2 fixed castors
- Grey non-marking thermoplastic rubber tyres on plastic wheel rim with precision deepgroove ball bearings, with foot guard
- Base frame available in RAL 5010 gentian blue, powder-coated

DOCUMENT TROLLEY WITH 9 COMPARTMENTS

Lockable by roller shutter  
**EasySTOP**



\*Compartment size: 250 x 400 x 330 mm (W x D x H)

Document trolley | with 9 compartments | lockable

Article-no.	Dimension W x D x H (mm)	Weight kg	Loading surface Compartments*	Load cap. kg	Wheel diam. mm
sw-474.000	875 x 490 x 1460	76.0	9	400	160 x 40

Load capacity shelf: 50 kg\*\*

\*\*Static distributed load; Total load of the transport device must not be exceeded!

Ajánlatkérés: [atamax@atamax.hu](mailto:atamax@atamax.hu)

Easy bulk material disposal  
Unlocking mechanism when tipping  
Optionally wheelsets



## CONSTRUCTION

- Welded steel construction
- With roll-away system

## FEATURES

- Tipping by manual release or by contact with container to be filled
- Automatic return after trough is emptied
- Fork-lift tunnel for safe transport

## FITTINGS

- Various wheel types with different load capacities optionally available
- Possibility to retrofitting wheels
- Optionally with outlet cock (as ex-factory equipment)
- Available in 2 colours, RAL 5012 light blue or RAL 7016 anthracite grey, painted



## Self-tipper

Article-no. + /Colour	Dimension W x D x H (mm)	Weight kg	Bulk-edge height (mm)	Load cap. kg	Volume l
sw-300.004 / AG	1385 x 880 x 615	93.5	615	1500	300
sw-500.004 / AG	1485 x 1400 x 615	121.0	615	2000	520
sw-600.004 / AG	1535 x 860 x 865	118.0	865	2000	600
sw-100.004 / AG	1525 x 1205 x 1070	168.5	1070	2000	1000



## ADDITIONAL ARTICLES Wheelsets for self-tipper

Article-no.		Load cap. kg	Wheel diam. mm
zsw-000.500	Outlet cock (on page 126)*	-	-
rsa-200.400	Thermoplastic rubber tyres	500	200 x 40
rsa-200.401	Polyamide tyres	1050	200 x 50
rsa-200.402	Elastic solid-rubber tyres	1050	200 x 50
rsa-200.403	Polyurethane tyres 92° Shore A	1500	200 x 50
rsa-200.404	Polyurethane tyres 92° Shore A	2000	200 x 50

\*As ex-factory equipment

The type of wheels used may reduce the load capacity

Wheelset consisting of: 2 swivel castor with brake and foot guard and 2 fixed castor



Thermoplastic rubber tyre



Polyamide tyre



Elastic solid-rubber tyre



Polyurethane tyre 92° Shore A  
load capacity 1500 kg



Polyurethane tyre 92° Shore A  
load capacity 2000 kg

Automatic reset and lock  
after emptying

